REFERENCE TOOLKIT · 19 OCT 2026

1426 S Main St — Adib's Persian Rug Co


Walnut Creek, CA 94596 · APN 183-030-005 · Existing conditions, rules and prior drawings for planning the store. Storage: separate toolkit.

22,137 sf LOT (0.51 AC)	**3,727 sf** BUILDING, 1957	**96′-6″ × 41′-2″** FOOTPRINT, OVERALL	**16 + 3** PARKING SPOTS ON SITE + OFF SITE

Site

A-0.1 Cover sheet and site plan, ATA permit set, 2024-08-10 ·

Open full size

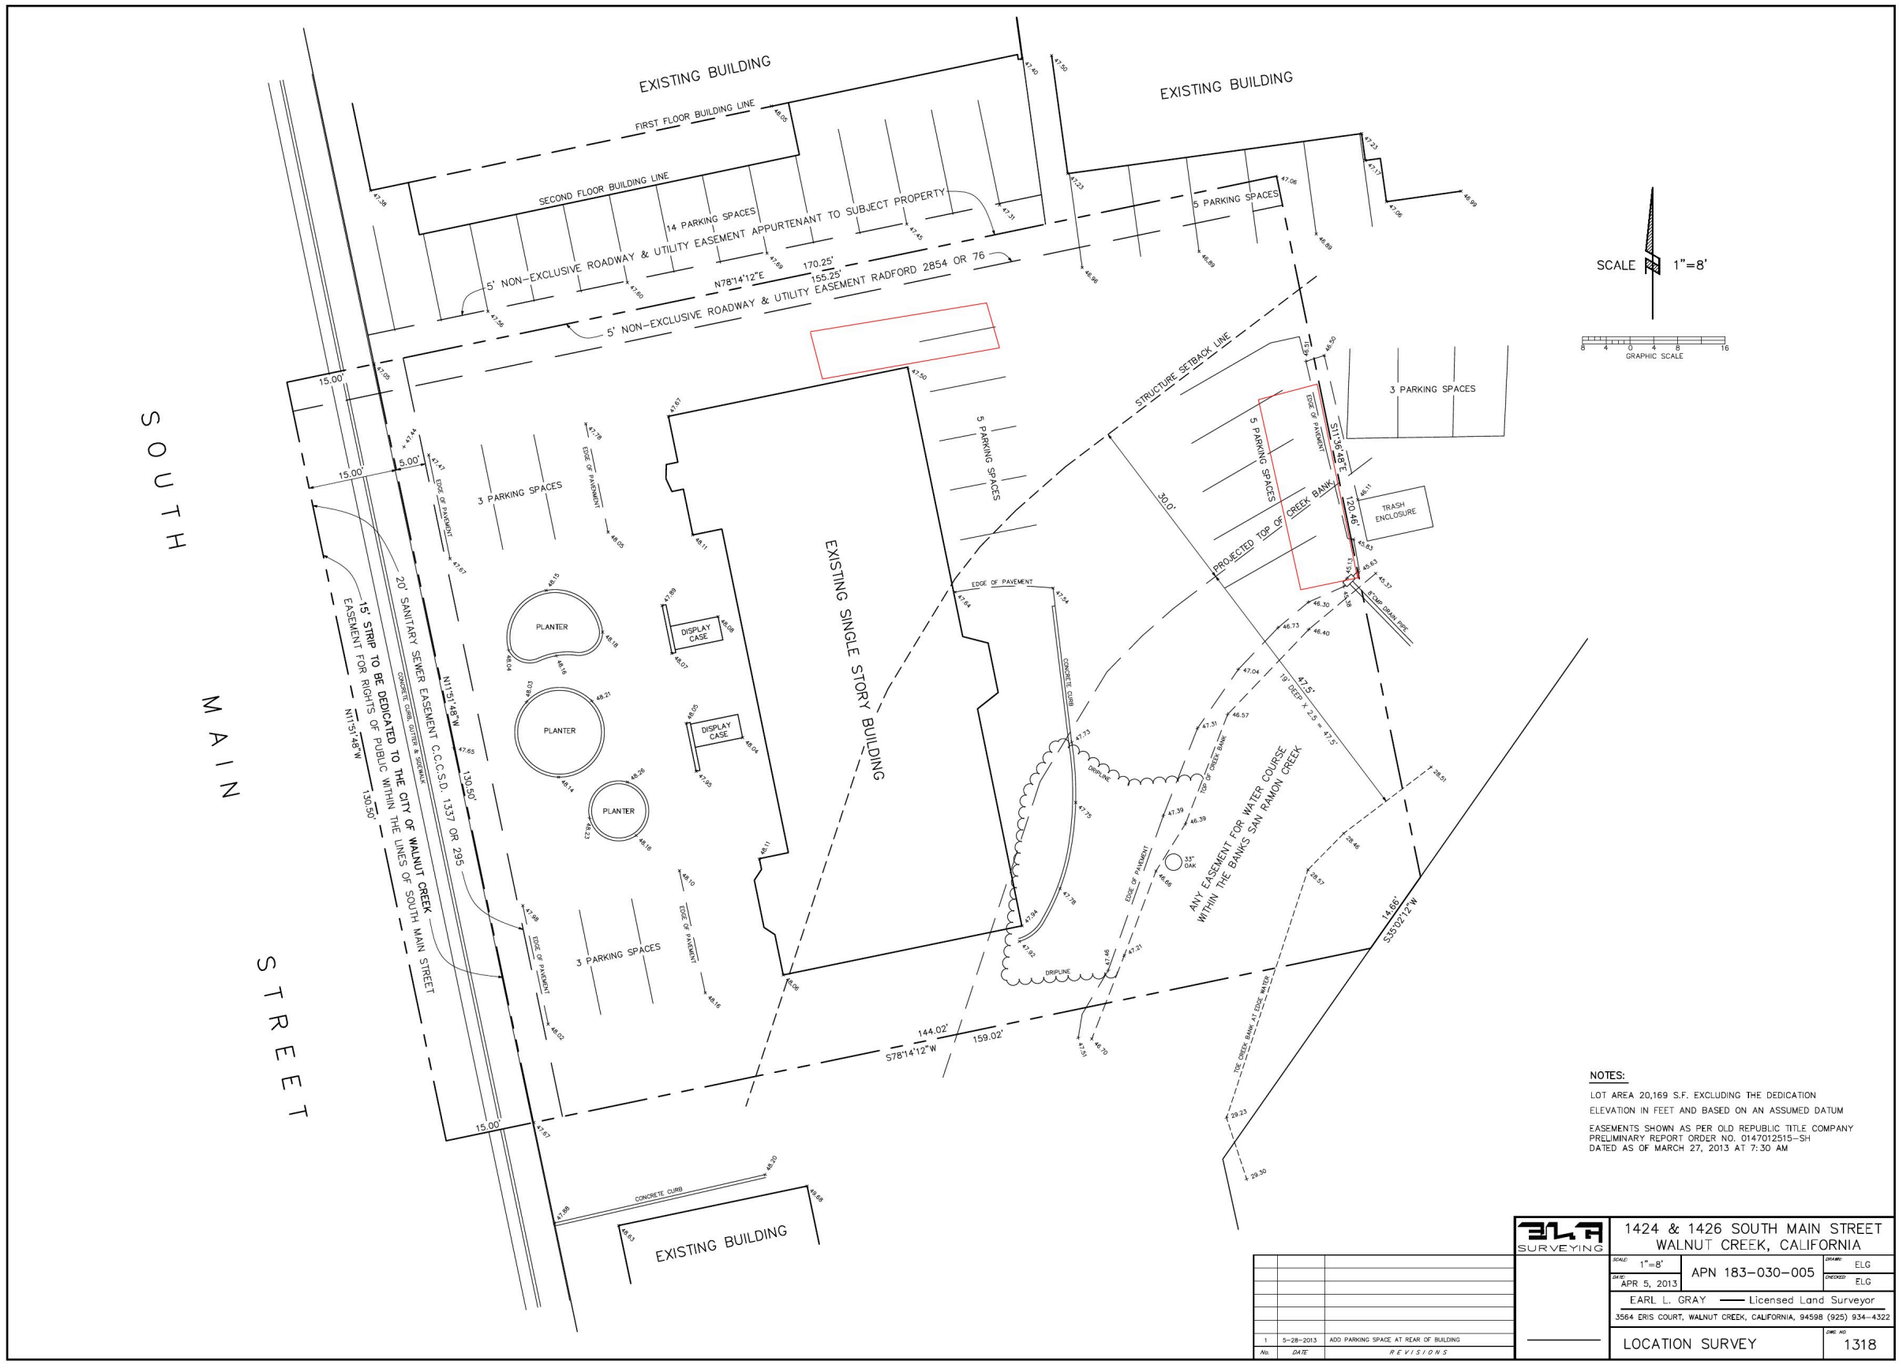


Location survey dwg 1318, Earl L. Gray, 2013-04-05 (rev. 2013-05-28), scale 1″ = 8′ ·

Open full size

ITEM	VALUE	SOURCE
Zoning / General Plan	C-R / GR	PRT 19-011, Aug 2019
Lot area	22,137 sf (city) · 20,240 sf (ATA sheet) · 20,169 sf excl. dedication (survey)	Staff report 5/2020 · A-0.1 · survey 1318
Occupancy / construction	M / IIIB, 8″ CMU + wood frame, 1 story	A-0.1
Height limit	35 ft	City letter 11/22/2019
Shared access	Recorded revocable license with neighbor (Sinovest)	License v09, 2020

Building — existing

3D scan: Matterport tour (Ali, Nov 2023; measure inside the viewer)

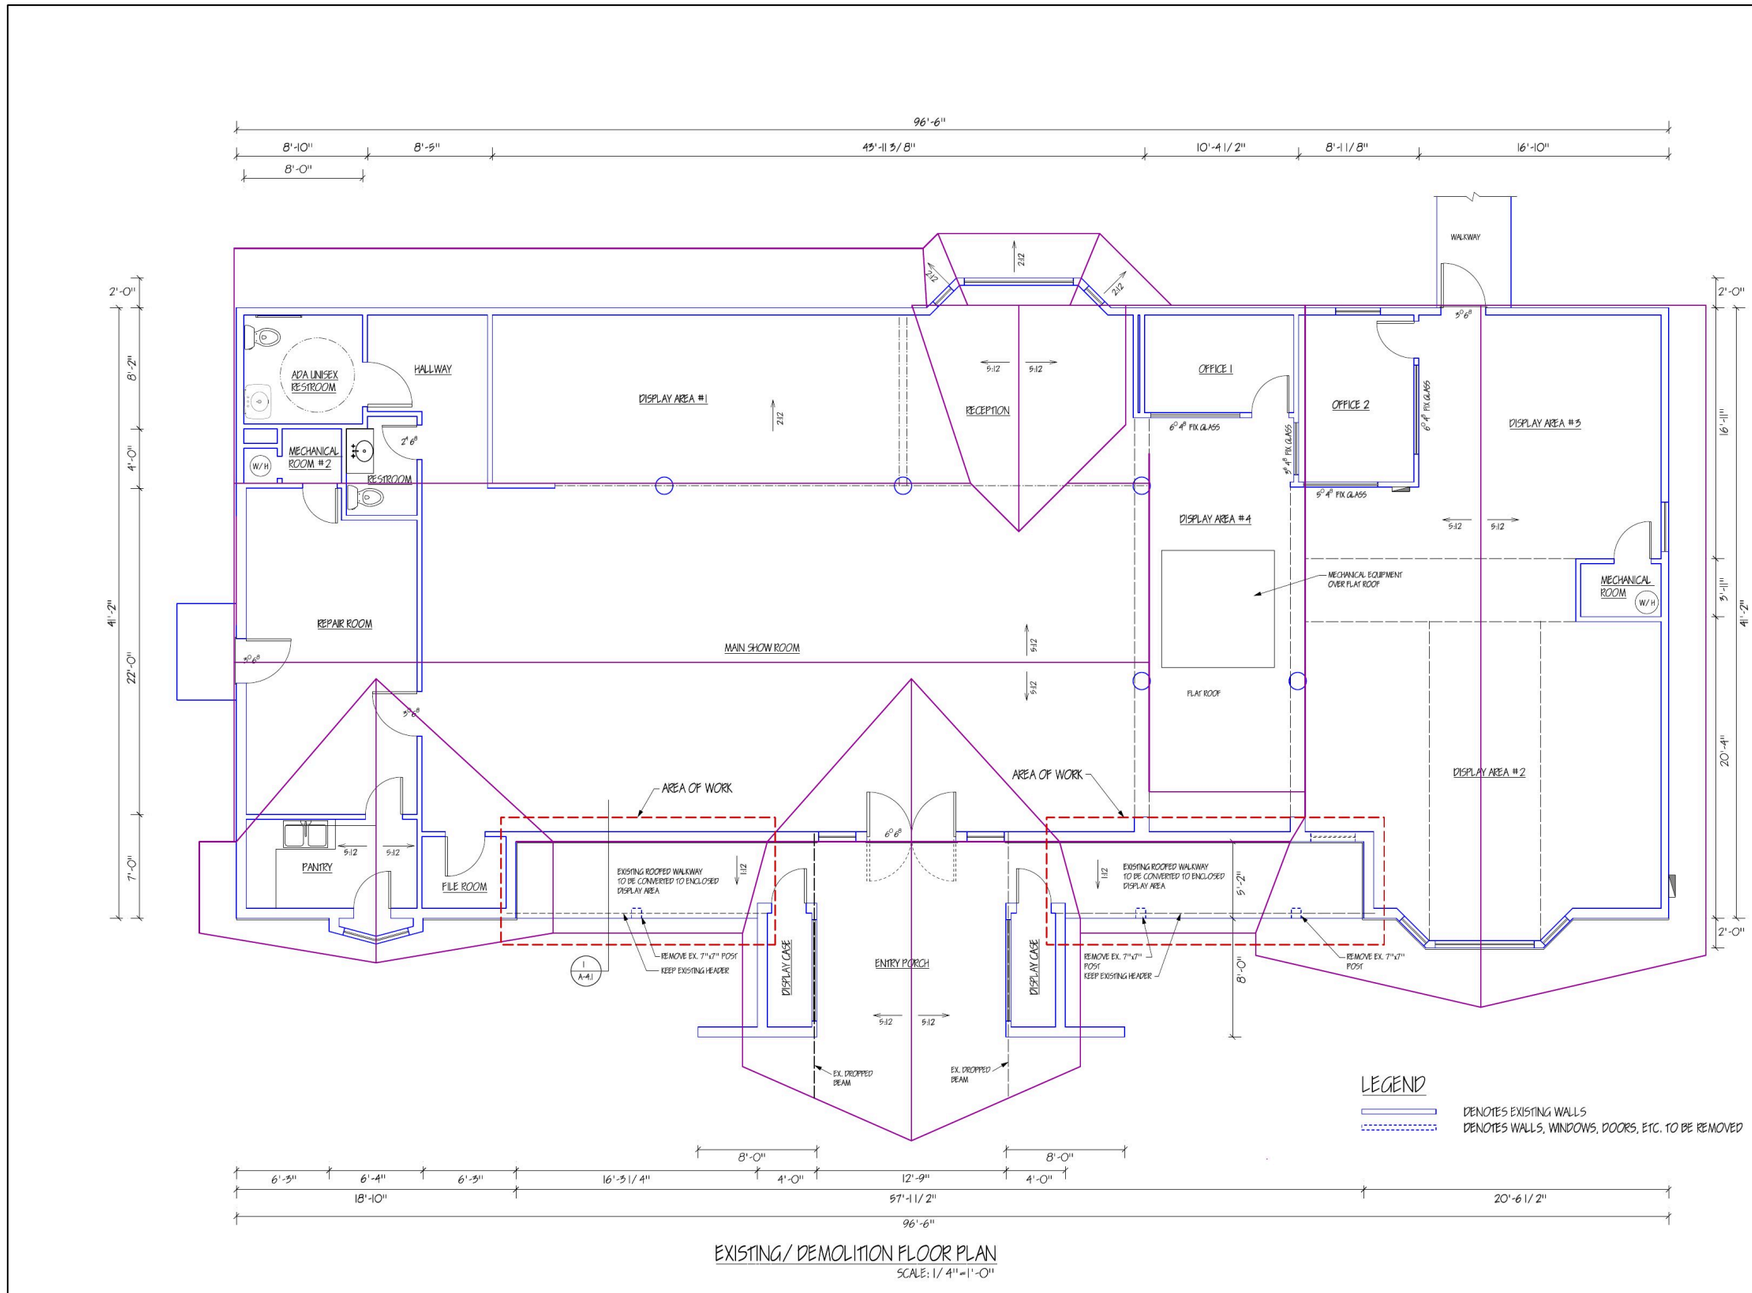

PRELIMINARY NOT VALID FOR CONSTRUCTION
FOR BIDDING PURPOSES ONLY

EXISTING/DEMOLITION
FLOOR PLAN

ATA
ENGINEERING
Ali Ashfa, P.E.
1202 Main Street, Redwood City, CA 94063
Tel. 650.363.2338, Fax 650.363.2031, email: ata@ataeng.net

NO. CE49876
Exp. 6-30-25
CIVIL
STATE OF CALIFORNIA

REMODEL/ADDITION:
ADIB'S PERSIAN RUG CO
1426 S MAIN STREET
WALNUT CREEK,CA

DATE: 2024-08-05

A-1.1

OF SHEETS

A-1.1 Existing / demolition floor plan, whole building, 1/4″ = 1′-0″ (ATA bidding set, 2024-08-05) ·

Open full size

ROOF FRAMING NOTES:

R1) Contractor to verify all point loads to be chased to framing or foundation

R2) *EXTERIOR WALLS:* *(typical unless noted otherwise)*
studs to 10' max 2x4 at 16" o.c.
studs to 16' max 2x6 at 16" o.c.
1. Gable end walls shall be balloon framed at vaulted ceiling
with minimum (2) 2x king studs. Note 4x posts are required at holdowns.
2. All new plumbing walls shall be 2x6 at 16" o.c.

R3) *HEADERS:* *(typical unless noted otherwise)*
1. Headers are DFL, No. 1,
2. Engineered lumber such as PLM is preferred to minimize shrinkage
3. Double jack studs min. at spans over 5'
(4x posts are required at shearwall ends to tie holdowns)
4. At spans over 5', headers to tie to jack posts with A35's or LTP4's.
A) 2X4 WALLS;
Exterior and Interior bearing walls: 4x8 to 4' span, 4x10 to 10', 4x12 to 14'
Interior non-bearing walls, 4x8 to 6' span, 4x6 to 3' span
B) 2X6 WALLS;
Exterior and Interior bearing walls: 6x8 to 4' span, 6x10 to 11', 6x12 to 15'
Interior non-bearing walls, 6x8 to 7' span, 6x6 to 4' span

R4) *HANGERS* *(typical unless noted otherwise)*:
A) RAFTERS: all new rafters are to receive hangers as follows
2x6 rafters: A35,
2x8 rafters: LS70 typical, may use A35's to 6' span,
2x10 rafters: LS90 typical, may use LS70 to 12' span, A35's to 6' span,
B) *RIDGE TO HIPS:*
HRC hangers or (2) LS90's at 10" deep members, (2) LS70's at 8" deep members
C) FLUSH ROOF OR CEILING BEAMS:
Flush Parallams: HGUS
Flush DFL: HUS

R5) *POSTS* *(typical unless noted otherwise)*:
1. Posts shall not break through double top plates.
Spilce post at top plates, clip posts to plates with (2) A35's
2. Posts can be solid members or multiple studs
nailed with 16d at 12" o.c per lap, (solid posts at HD's)
3. Posts to match thickness of walls and width of beams they are supporting;
for example:4x6 at 2x4 wall supporting 6x beam, etc.
4. Posts supporting Ridge beams, hips, valleys or kickers
shall have PC, EPC or (2) A35's or (2) LPT4's
5. Provide beams, solid blkg or posts to transfer loads to fdn or framing below

6. ○ denote kicker posts. These are tilted posts to 45 degrees from vertical max. Connect top and bottom of kickers with (2) A35's

R6) *COLLECTORS* *(typical unless noted otherwise)*:
1. PARALLEL FRAMING ELEMENTS SUCH AS JOISTS OR BEAMS:
4" Edge nail to collector element, strap at splices as shown on the plans
2. PERPENDICULAR FRAMING ELEMENTS:
2x4 flat or solid block & use continuous collector straps as shown on the plans

R7) *RIDGE BEAMS* *(typical unless noted otherwise)*:
All existing to remain.

R8) *RAFTERS* *(typical unless noted otherwise)*:
All existing to remain.


R8) *CEILING JOISTS* *(typical unless noted otherwise)*:
All existing to remain.

SHEARWALL NOTES:

S1) ╲ **Where shown on roof framing plan:**
1. Existing HDU5 at 4x posts typical u.n.o. See foundation plan for size.
2. See details 1-4 sheet SD1.
3. Holdowns are to be installed at bottom of walls.

S2) ◯ Indicates existing shear wall plywood & nailing schedule. Type "A" on all new exterior walls, typical u.n.o. See sheet SD-1 for nailing schedule.

S3) 3X Plates required:
At type "B", "C" and "E" shearwalls, 3x nominal studs and plates are to be used at edge nailing and where panels adjoin. Top plates may be (2) 2x.
See sheet SD1 details and notes and other detail sheets for shearwall detail.
S4) Run shear wall plywood continuously at wall "T" intersections.
S5) Provide shear transfer to roof & through floor framing:
1. Extend plywood to roof and provide shear transfer hardware
2. See sheet SD1 details and notes and other shear transfer details.
S6) Use *(1) MSTA36* strap per top plate:
1. at existing to new top plates
2. both or one top plate is cut where top plate detail 13/SD1 is not satisfied
3. top plates are at different elevations, see detail 14b/SD1
4. Gable walls: (1) MSTA36 over ridge line
S7) Engineer to review shearwalls and holdowns.

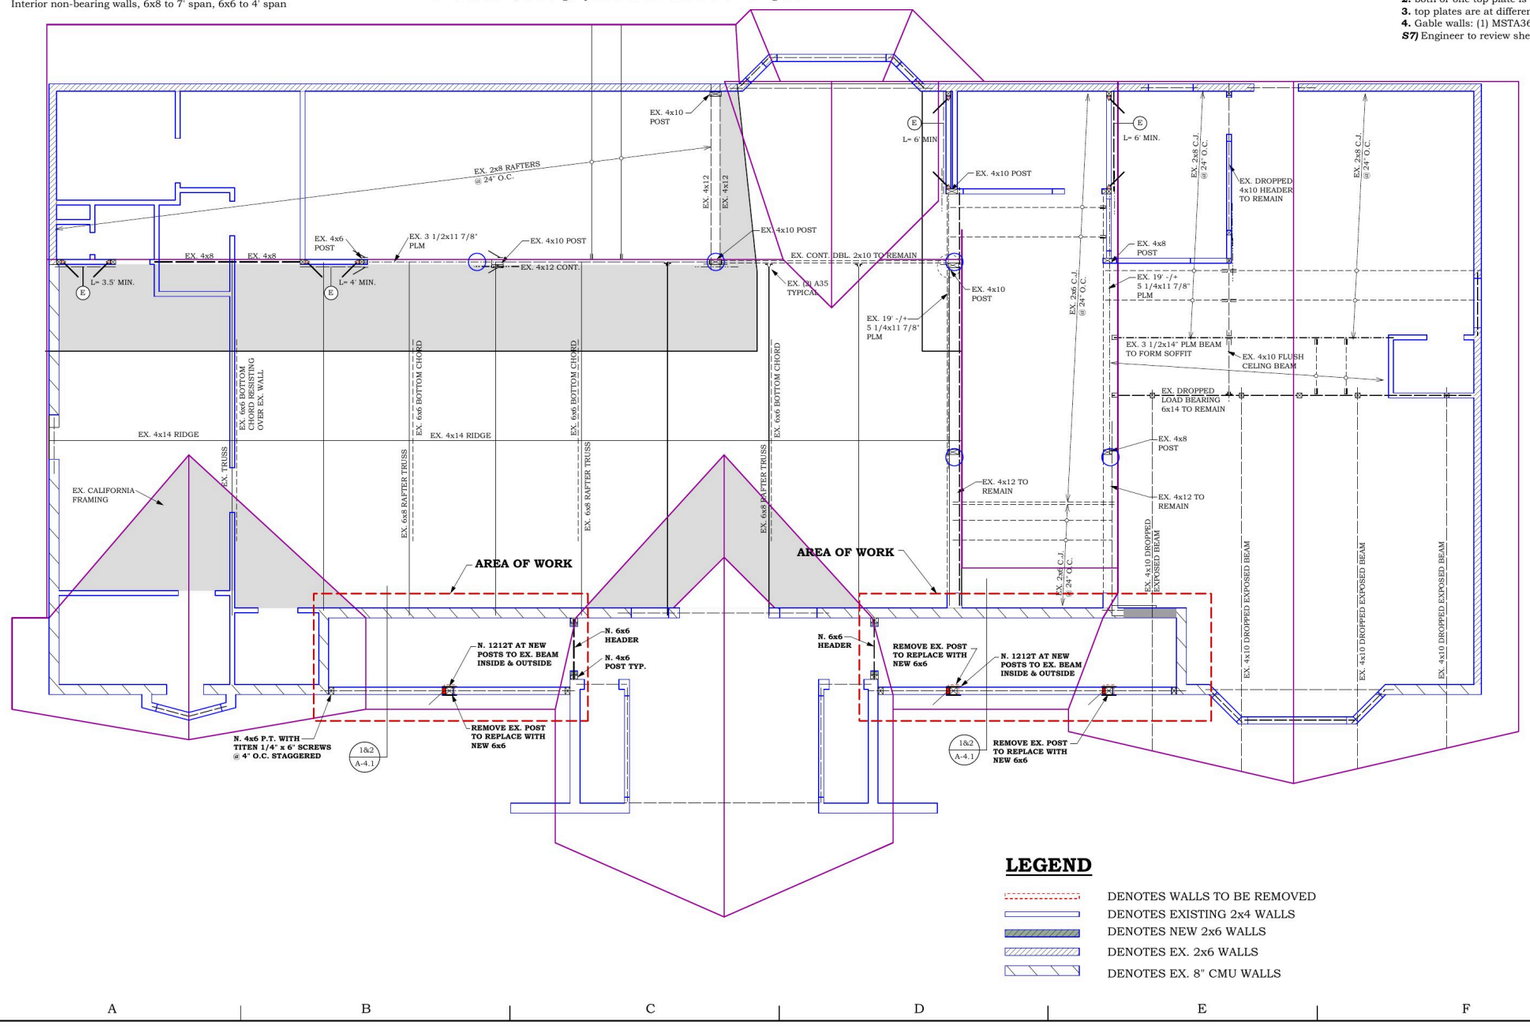

LEGEND

- DENOTES WALLS TO BE REMOVED
- DENOTES EXISTING 2x4 WALLS
- DENOTES NEW 2x6 WALLS
- DENOTES EX. 2x6 WALLS
- DENOTES EX. 8" CMU WALLS

STRUCTURAL OBSERVATIONS BY ENGINEER:
3 BUSINESS DAY EMAILED NOTICE IS REQUIRED TO SCHEDULE SITE VISITS - ENGINEER TO OBSERVE:

1- FOUNDATION:
A) REBARS FOR ANY POUR AT 10%
B) REBARS FOR ANY POUR AT 100%
2- FRAMING:
A) ANY FLOOR SURFACE PRIOR TO PLYWOOD
B) ANY WALL SURFACE PRIOR TO PLYWOOD
C) ANY ROOF SURFACE PRIOR TO PLYWOOD
3- SHEARWALLS, HOLDOWNS, & POSITIVE CONNECTORS.
4- FINAL VISIT AFTER PLUMBING & ELECTRICAL

CONTRACTOR MUST CONTACT ENGINEER:
3 BUSINESS DAY EMAILED NOTICE IS REQUIRED:

PRIOR TO ORDERING ANY MATERIAL
& AFTER THE STRUCTURE IS EXPOSED,
THE ENGINEER & ARCHITECT SHALL
REVIEW STRUCTURAL PLANS TO CONFIRM
OR MODIFY PROPOSED STRUCTURAL DESIGN.

SCALE: 1/4" = 1'-0"

Ali Atlb, P.E.
ATA ENGINEERING
1202 Main Street, Redwood City, CA 94063
Tel. 650.363.2338, Fax 650.363.2031, email: ata@ataeng.net

PRELIMINARY NOT VALID FOR CONSTRUCTION
FOR BIDDING PURPOSES ONLY

ROOF FRAMING PLAN

REMODEL/ADDITION:
ADIB'S PERSIAN RUG CO
1426 S MAIN STREET
WALNUT CREEK,CA

DATE: 2024-08-05

S-2

OF SHEETS

S-2 Roof framing plan, whole building (ATA bidding set, 2024-08-05) ·
Open full size


ELEMENT	DIMENSION	SHEET
Overall length × depth	96′-6″ × 41′-2″	A-1.1
Entry porch width	12′-9″	A-1.1
Front walkway bays (W / E)	≈17′-0″ / ≈20′-9″ wide	A-2.1
Existing entry doors	(2) 3′-0″ × 6′-8″	ATA email 8/6/2024
Walkway posts	6×6 / 7×7, under existing headers	A-1.1, A-2.1
Roof pitches	5:12 main · 2:12 / 1:12 walkways · flat at mech.	A-1.1

Rules on this lot

CONSTRAINT	VALUE	EFFECT	SOURCE
Creek structural setback (CCCFCD)	30 ft from 2.5:1 line off creek toe	≈⅓ of existing building inside it	Staff report 5/28/2020
Creek Preserve Area	50 ft from creek centerline	Rear of lot	Staff report 5/28/2020
Street setback (GP Fig. 11)	20–30 ft, 25 ft avg	Exception "could be considered" (2020)	AppStat1 11/2019 · staff report
Future street line	50 ft from Main St centerline	Dedication on new development	AppStat2 4/2020
Parking reduction	max 20%	Staff: unlikely to support reduction (2019); 22 parking spots if retail only (2020)	PRT 2019 · staff report 2020
Parking spot location	≥10 ft from back of sidewalk	Front parking spots limited	PRT 2019 · AppStat1
Building code	2025 California codes (eff. 1 Jan 2026)	2024 ATA set cites 2022 codes	A-0.1

2024 ATA drawings (prior design, for reference)

Ali Adib, P.E., ATA Engineering. Bidding set 2 Aug 2024; permit set dated 10 Aug 2024 (A-0.1, A-1.1, A-2.1, A-3.1, S-1, SD-1). Not submitted.

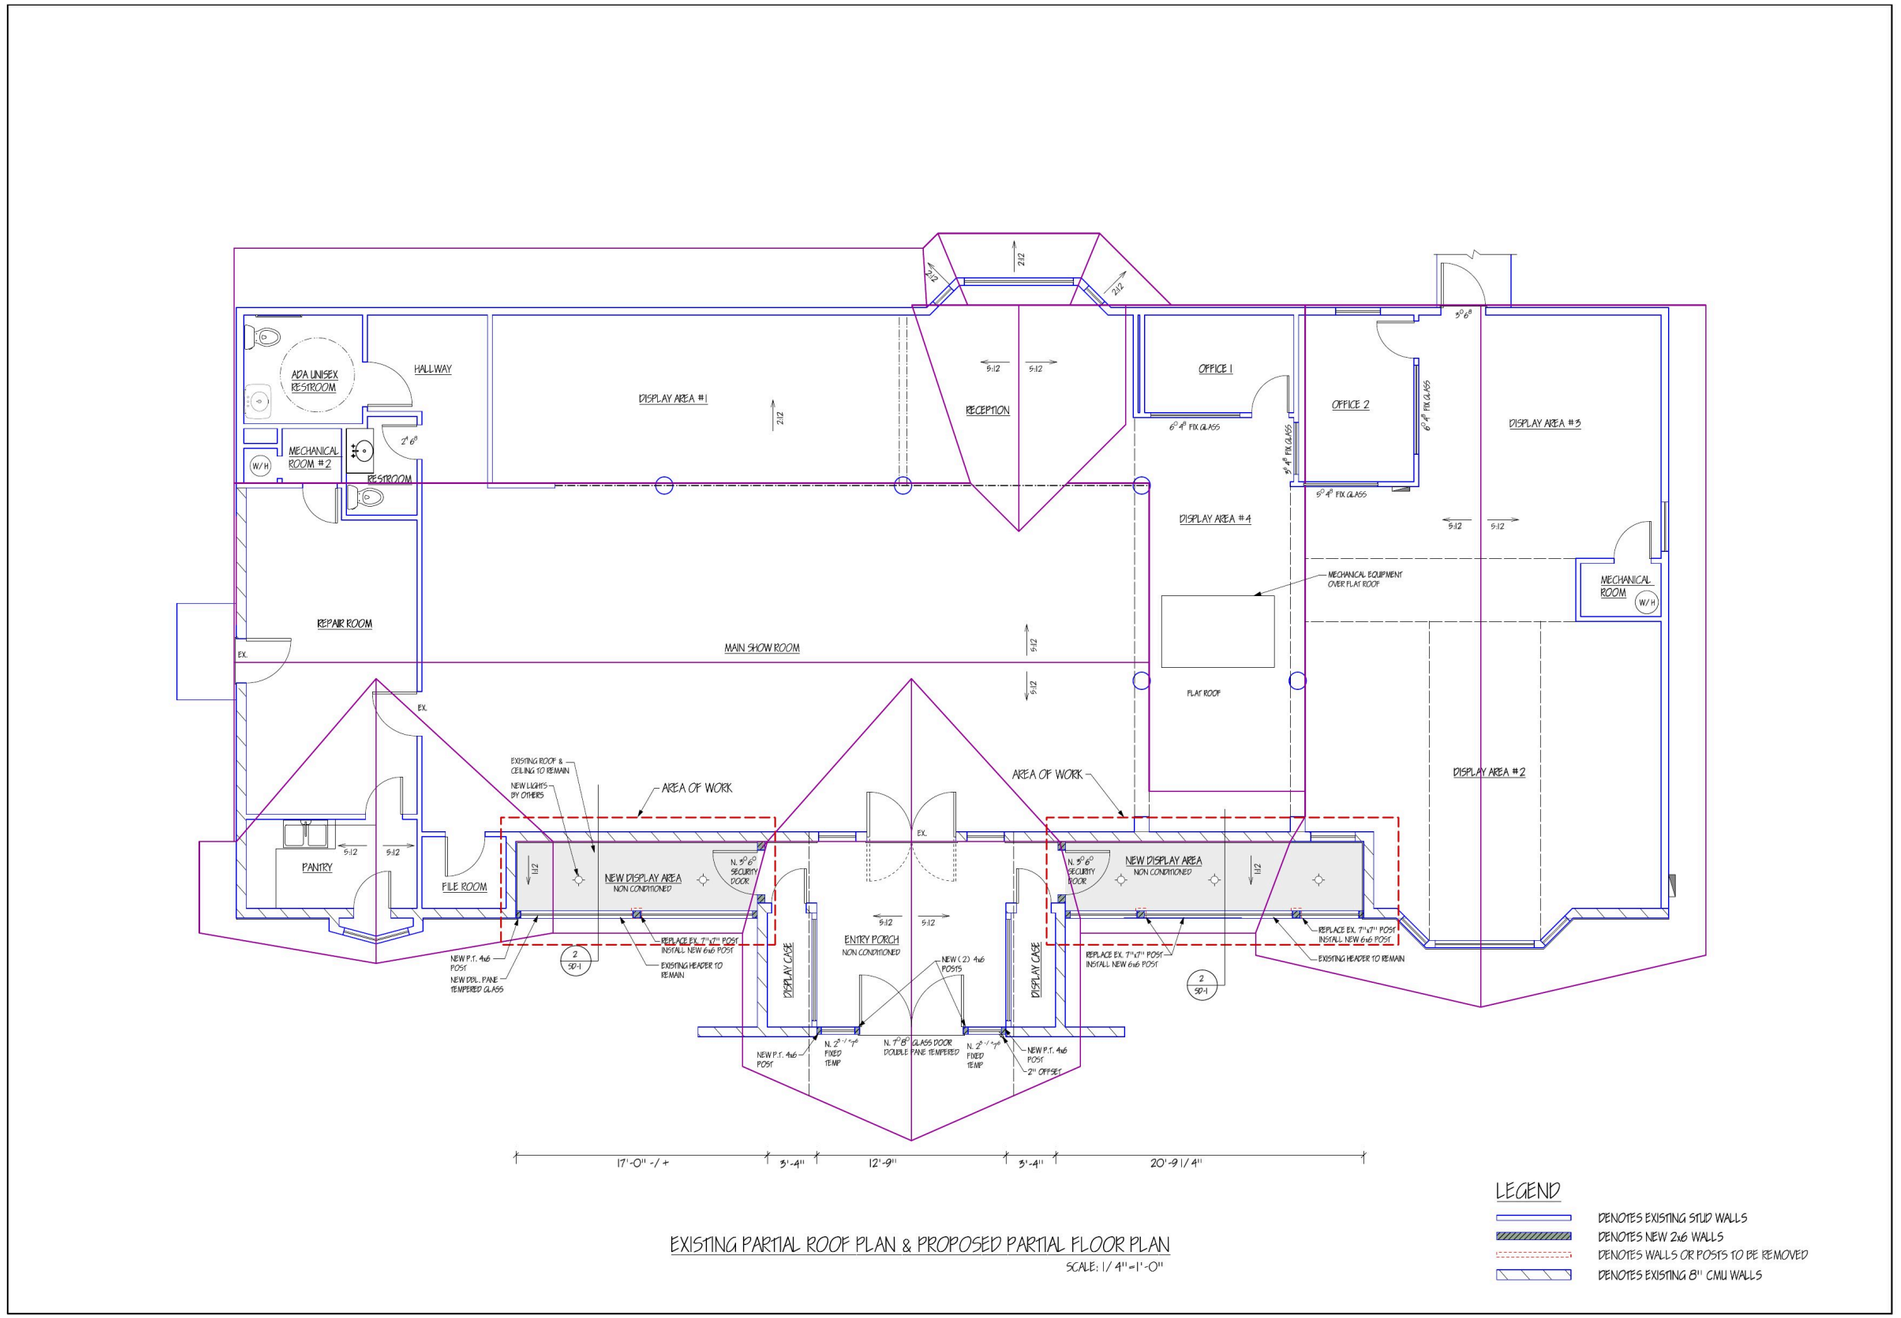

ATA ENGINEERING
Ali Adib, P.E.
1202 Main Street, Redwood City, CA 94063
Tel. 650.363.2338, Fax 650.363.2031, email: ata@ataeng.net

PROPOSED FLOOR PLAN

REMODEL/ADDITION:
ADIB'S PERSIAN RUG CO
1426 S MAIN STREET
WALNUT CREEK,CA


DATE: 2024-08-10

A-2.1


OF SHEETS

A-2.1 Existing partial roof plan & proposed partial floor plan (permit set, 2024-08-10) ·

Open full size

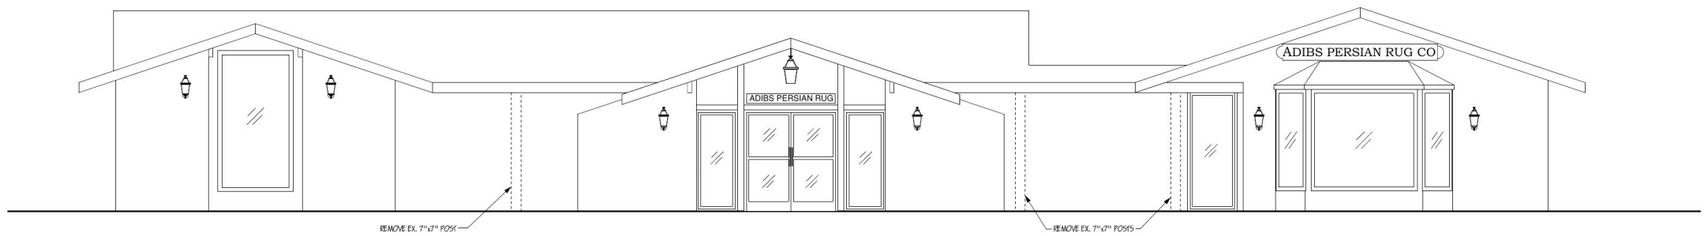

EXISTING FRONT ELEVATION
SCALE: 1/ 4"=1'-0"

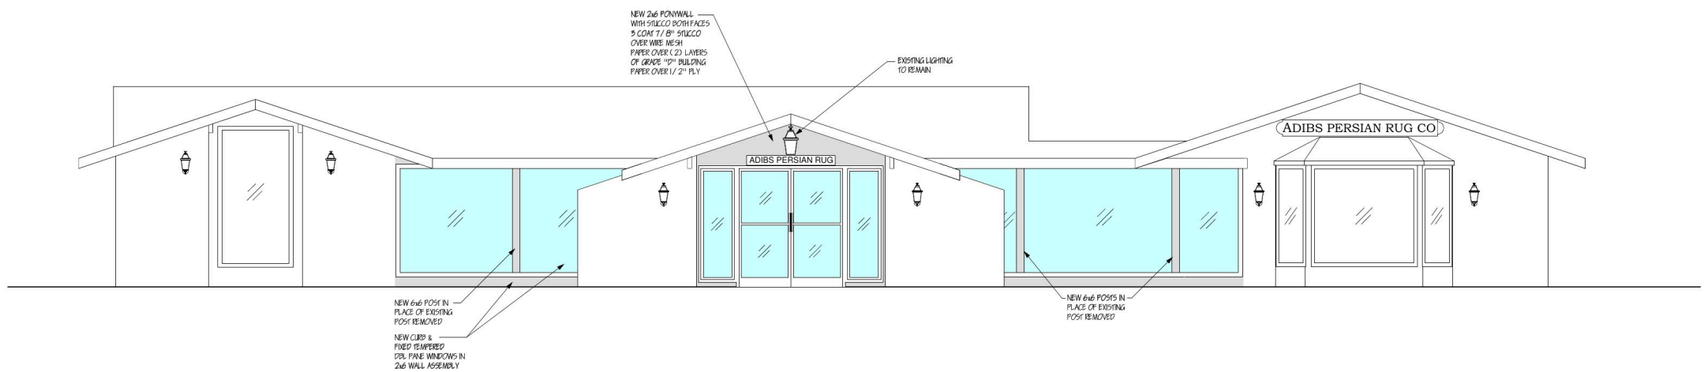

PROPOSED FRONT ELEVATION
SCALE: 1/ 4"=1'-0"

ATA ENGINEERING
Ali Adib, P.E.
1202 Main Street, Redwood City, CA 94063
Tel. 650.363.2338, Fax 650.363.2031, email: ala@ataeng.net

ELEVATIONS

REMODEL/ADDITION:
ADIB'S PERSIAN RUG CO
1426 S MAIN STREET
WALNUT CREEK,CA

DATE: 2024-08-10

A-3.1

OF SHEETS

A-3.1 Existing and proposed front elevations (permit set, 2024-08-10) ·
Open full size

ITEM	EXISTING	2024 DRAWING
Walkway bays	Open, roofed	Enclosed display areas, non-conditioned
Bay walls	—	2×6 pony wall, 3-coat stucco, fixed tempered double-pane glazing
Bay floor	Walkway	New 4″ slab, #3 @ 12″ o.c. e.w.
Posts	6×6 / 7×7	New 6×6 and P.T. 4×6; existing headers kept
Entry doors	(2) 3′-0″ × 6′-8″	(2) 3′-6″ × 8′-0″; taller sidelights
Security	—	Secondary entry door, buffer zone at porch
Electrical / HVAC / site	—	No change
Stamp	CE49976, exp. 6-30-25	

Roof & solar — permit S26106

ITEM	VALUE
Type	Solar System – Commercial (PV); re-roof by same contractor
System	26.84 kW PV · 1,285.72 sf · 3 batteries, 34.5 kW
Contractor	SolCore, Inc. · GAF shingle deck sent 7/20/2026
Issued	2026-10-13
Must start by	2027-10-13 (365 days)
Must finish by	2030-10-13 (4 years)
Inspections	None yet
Funding	Separate, already financed


All drawing sheets (17)

Every sheet shown whole. Click any sheet to open it at full resolution and zoom.

A-0.1 - COVER SHEET
A-1.1 - EXISTING/ DEMOLITION FLOOR PLAN
A-2.1 - PROPOSED FLOOR PLAN
A-3.1 - ELEVATIONS
S-1 - PARTIAL STRUCTURAL ROOF & FOUNDATION PLAN
SD-1 - STRUCTURAL SECTIONS, DETAILS & NOTES

SHEET INDEX | 1

VICINITY MAP | 5

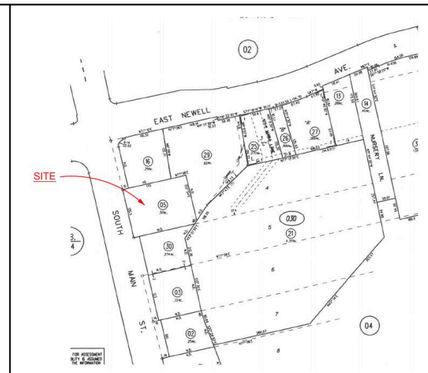


APN :	183-030-005
LOT SIZE :	20,240.0 S.F.
OCUPANCY GROUP :	M
CONSTRUCTION TYPE :	IBC TYPE 3B JOISTED MASONARY
NUMBER OF STORIES :	1 STORIES
ZONING CLASIFICATION:	CR
FIRE SPRINKLERS :	NO

PROJECT DATA | 2

2022 CALIFORNIA RESIDENTIAL CODE
2022 CALIFORNIA BUILDING CODE
2022 CALIFORNIA PLUMBING CODE
2022 CALIFORNIA MECHANICAL CODE
2022 CALIFORNIA ELECTRIC CODE
2022 CALIFORNIA ENERGY CODE
2022 CALIFORNIA FIRE CODE
2022 CAL GREEN
ALONG WITH ALL OTHER LOCAL, STATE & FEDERAL LAWS & REGULATIONS.
ASCE 7-19 (MINIMUM DESIGN LOADS)
AISC 341-22 (2022 SEISMIC DESIGN FOR STEEL BUILDINGS)
AISC 358-22 (PREQUALIFIED CONNECTIONS FOR SPECIAL & INTERMEDIATE MOMENT FRAMES)
AISC 360-22 (2022 STEEL SPECS 15TH EDITION)
ACI 318-22 (CONCRETE DESIGN)
AISC 360-22 (MASONRY DESIGN)
AF&PA/ NDS-21 (WOOD DESIGN)

AERIAL VIEW | 6

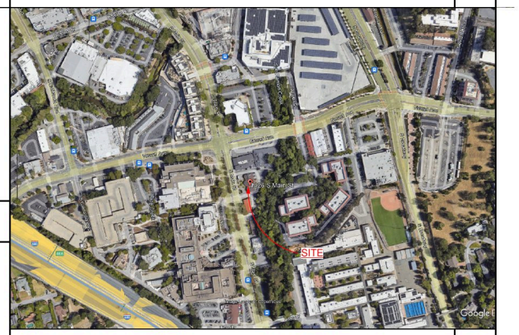

LOT AREA : 20,240 SF

DESIGN DATA | 3


BUILDING DATA | 7

OWNERS & APPLICANTS:
RAY ADIB
ADIB'S PERSIAN RUG CO
1426 S MAIN STREET
WALNUT CREEK, CA
TEL.: (925) 957-3338
ray@adibs.com

ARCHITECTURAL PLANS,
STRUCTURAL ENGINEERERING:
ATA ENGINEERING
1202 MAIN STREET
REDWOOD CITY, CA 94063
TEL.: (650) 363-2338
FAX: (650) 363-2031
ata@ataeng.net

PROJECT DIRECTORY | 4

| 8

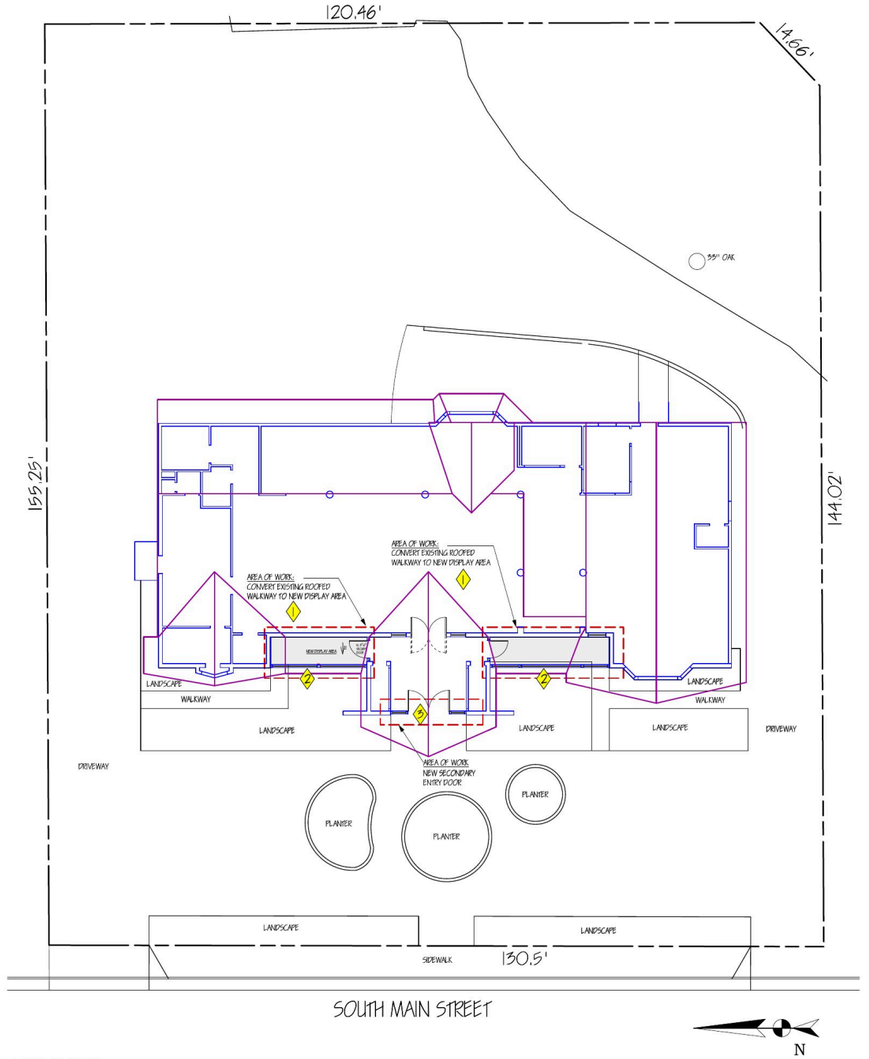

SCOPE OF WORK:

1. - CONVERT EXISTING ROOFED WALKWAY INTO A DISPLAY AREA
2. - ADD 2x6 WALL & WINDOWS UNDER EXISTING HEADERS
3. - ADD A SECONDARY ENTRY DOOR FOR SECURITY PURPOSES, TO CREATE A BUFFER ZONE TO EXISTING MAIN DOORS

SITE TO REMAIN AS-IS
NO NEW WORK IS PROPOSED

SCOPE OF WORK | SCALE: 1"=10'-0" | 9

ATA ENGINEERING
Ali Adib, P.E.
1202 Main Street, Redwood City, CA 94063
Tel. 650.363.2338, Fax 650.363.2031, email: ata@ataeng.net

COVER SHEET


REMODEL/ADDITION:
ADIB'S PERSIAN RUG CO
1426 S MAIN STREET
WALNUT CREEK,CA

DATE: 2024-08-10

A-0.1

OF SHEETS

A-0.1 Cover sheet, site plan · Permit set 2024-08-10 ·
Open full size

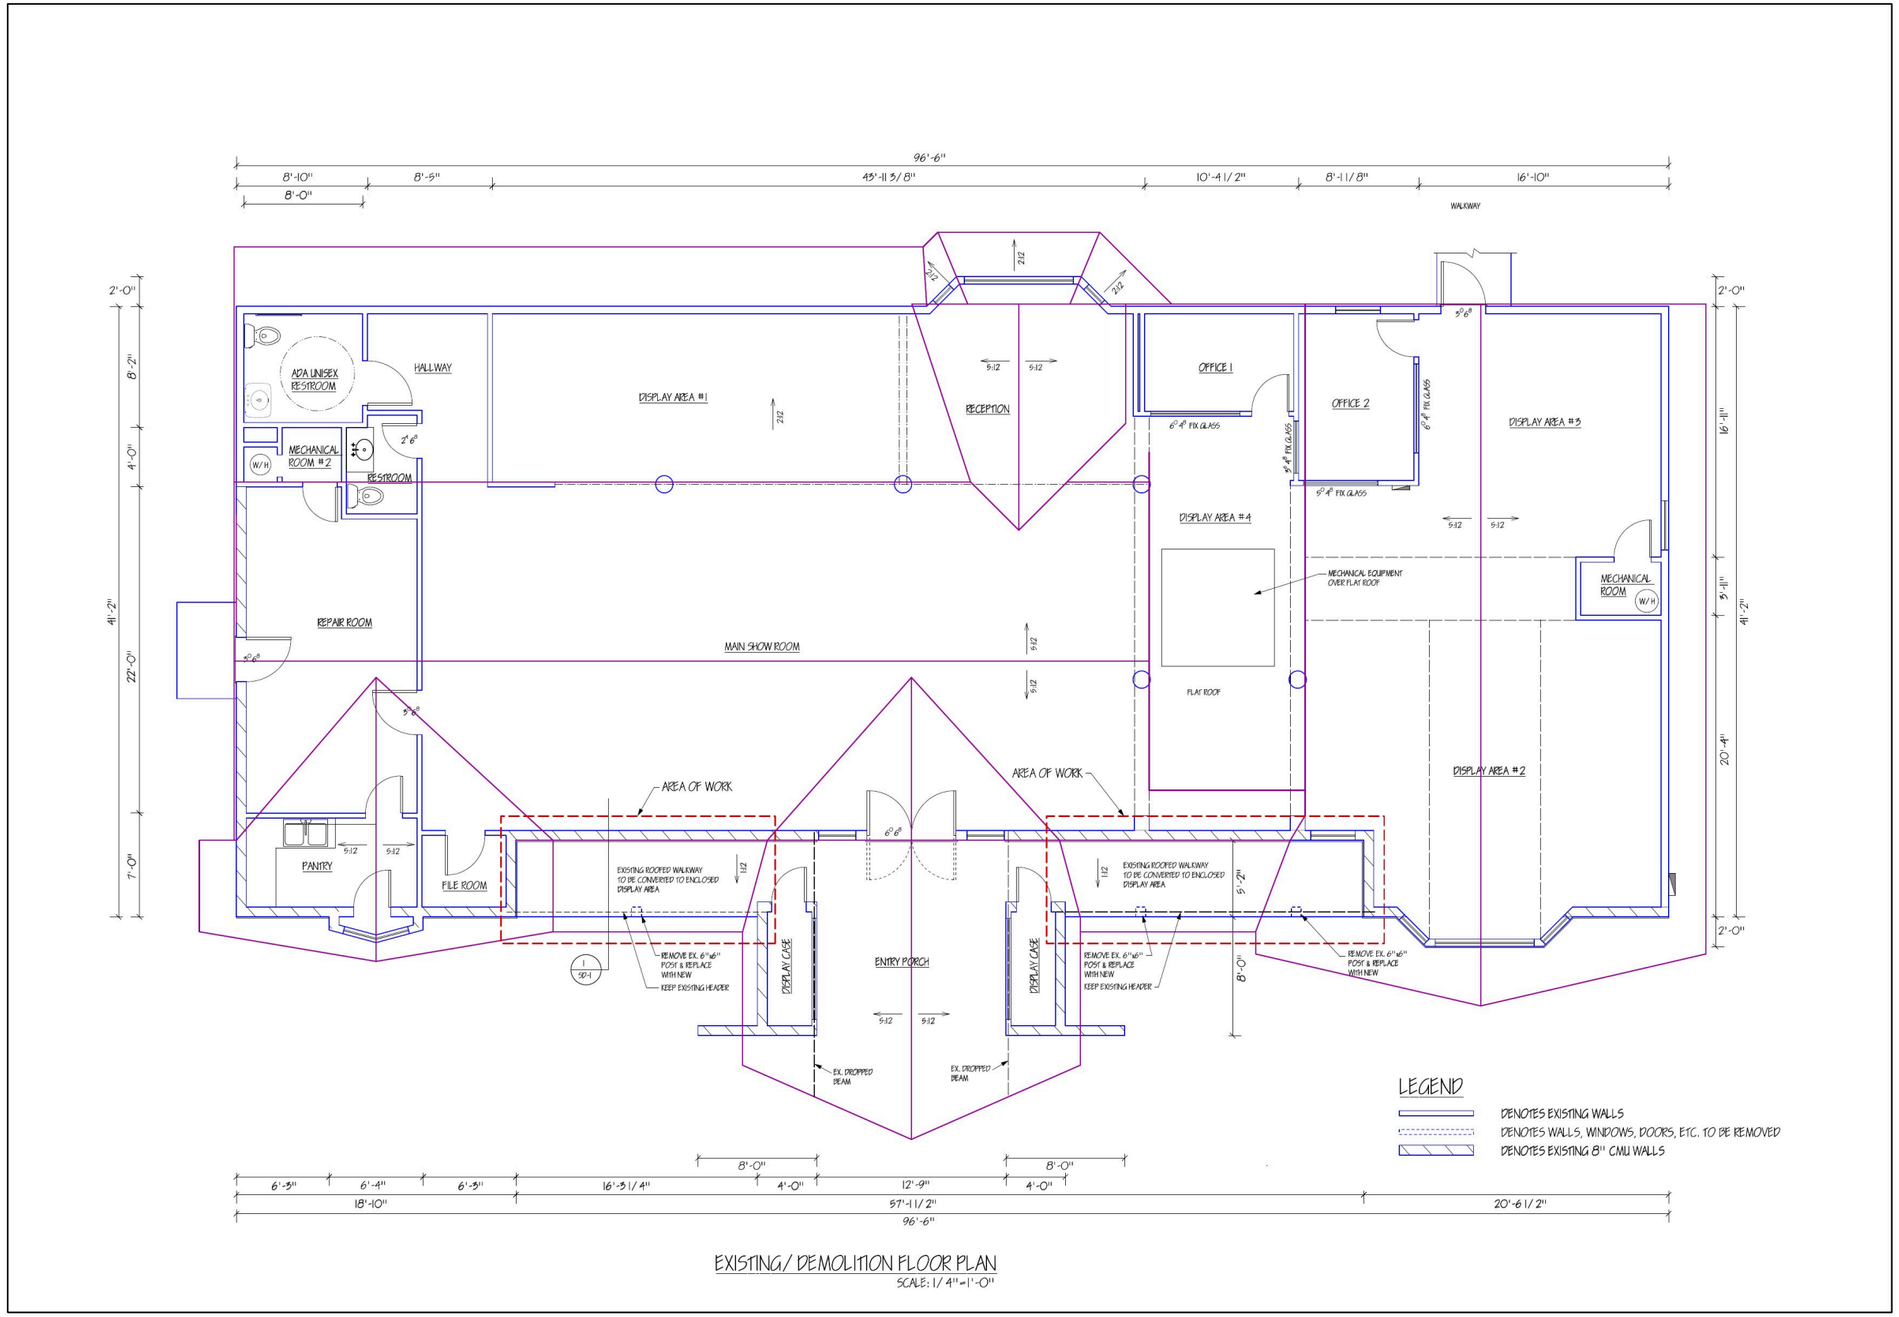

EXISTING/ DEMOLITION FLOOR PLAN
SCALE: 1/ 4"=1'-0"

ATA
ENGINEERING
Ali Adib, P.E.
1202 Main Street, Redwood City, CA 94063
Tel. 650.363.2338, Fax 650.363.2031, email: ata@ataeng.net

EXISTING/DEMOLITION FLOOR PLAN


REMODEL/ADDITION:
ADIB'S PERSIAN RUG CO
1426 S MAIN STREET
WALNUT CREEK,CA

DATE: 2024-08-10

A-1.1

OF SHEETS

A-1.1 Existing / demolition partial floor plan · Permit set ·
Open full size

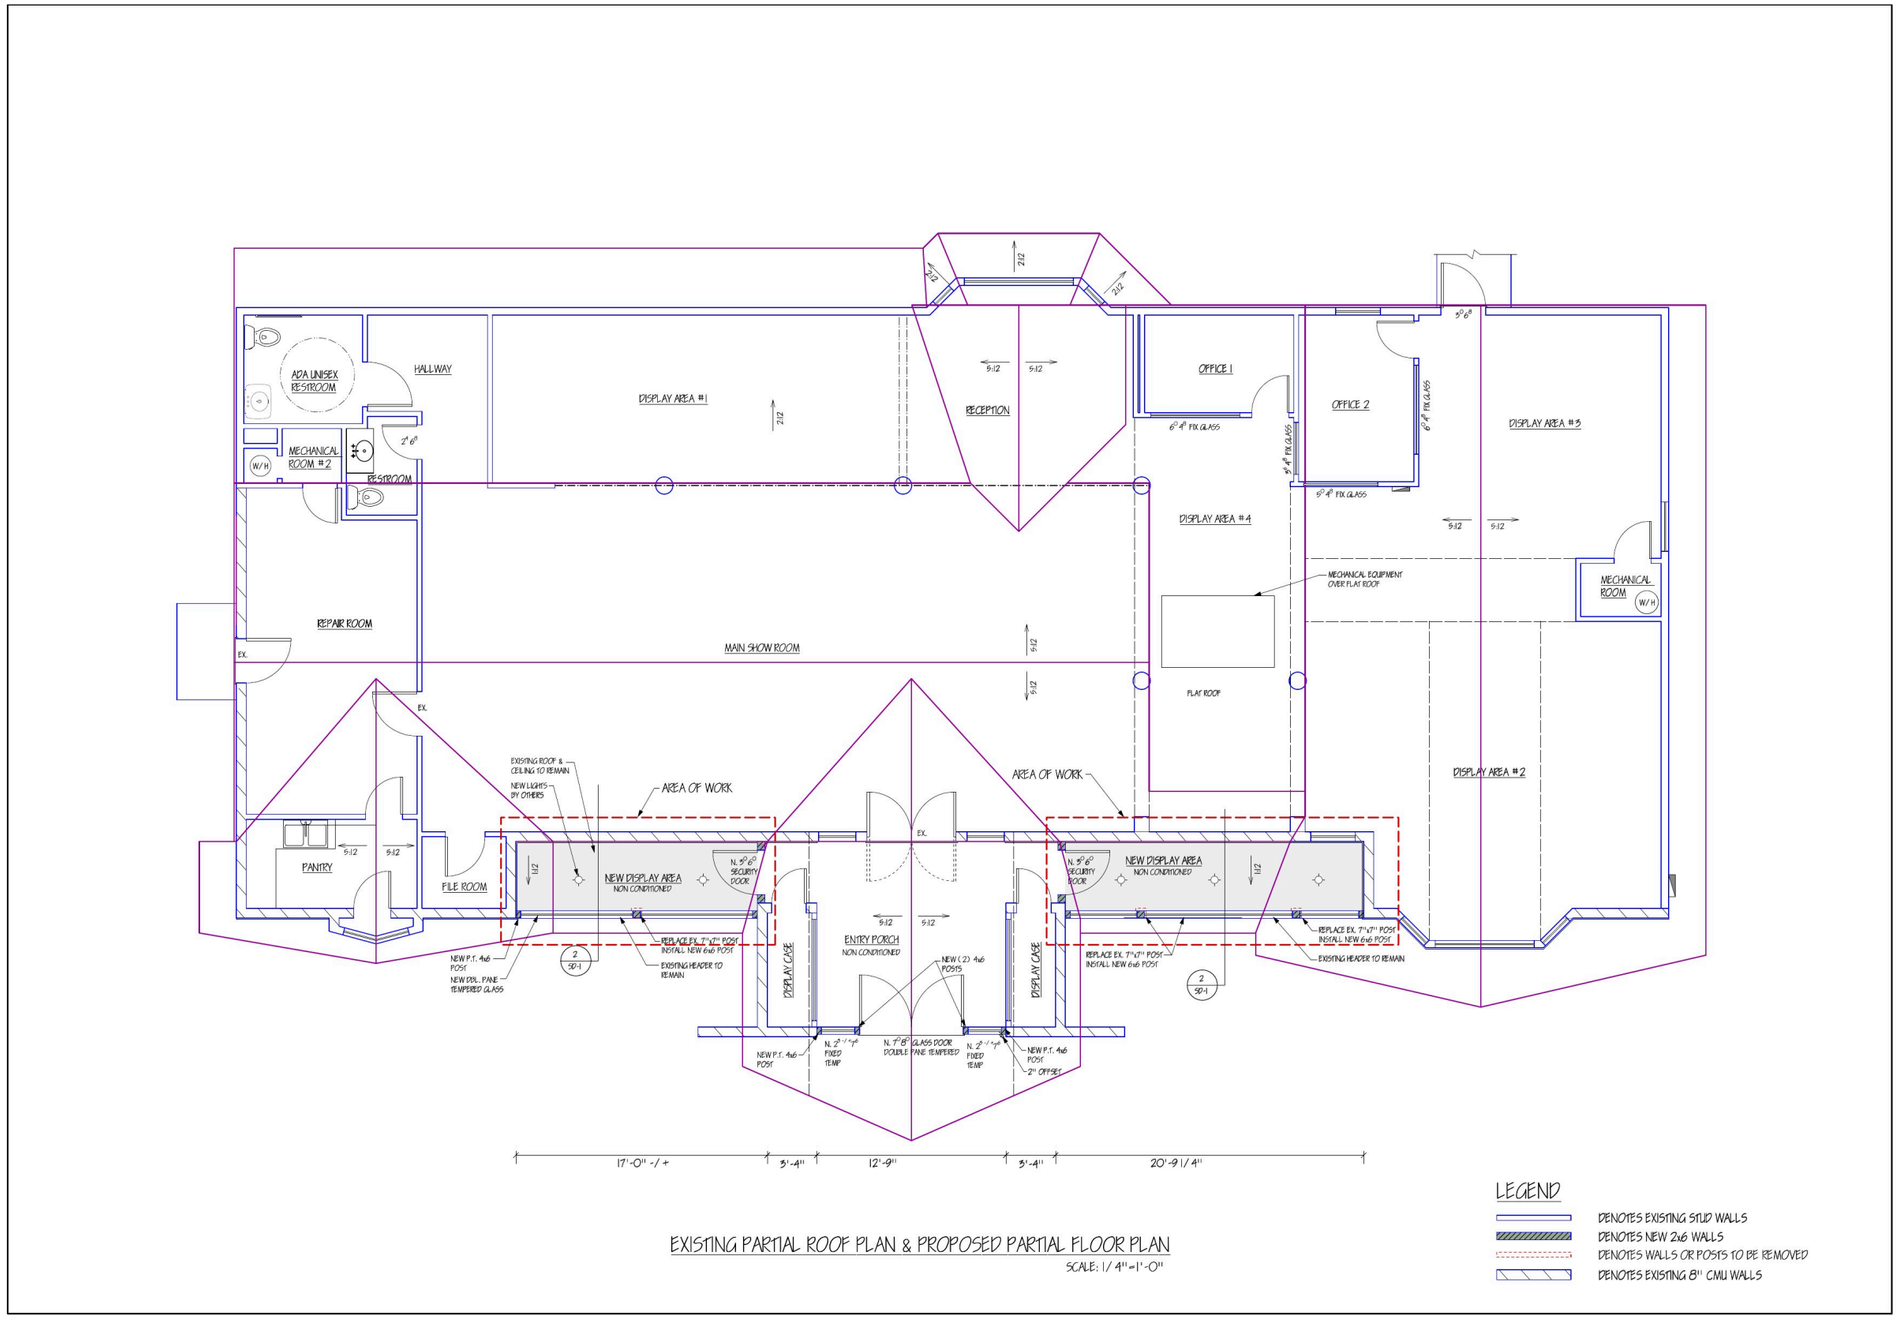

ATA ENGINEERING
Ali Adib, P.E.
1202 Main Street, Redwood City, CA 94063
Tel. 650.363.2338, Fax 650.363.2031, email: ata@ataeng.net

PROPOSED FLOOR PLAN

REMODEL/ADDITION:
ADIB'S PERSIAN RUG CO
1426 S MAIN STREET
WALNUT CREEK,CA


DATE: 2024-08-10

A-2.1


OF SHEETS

A-2.1 Partial roof plan & proposed partial floor plan · Permit set ·

Open full size

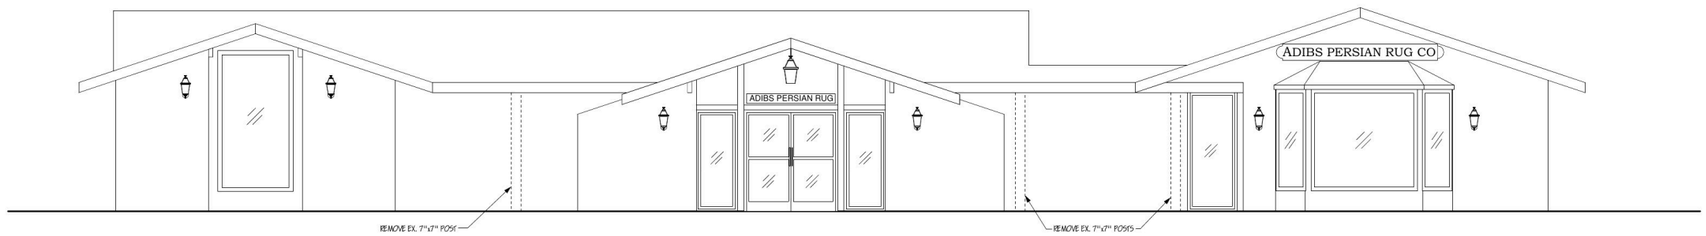

EXISTING FRONT ELEVATION
SCALE: 1/ 4"=1'-0"

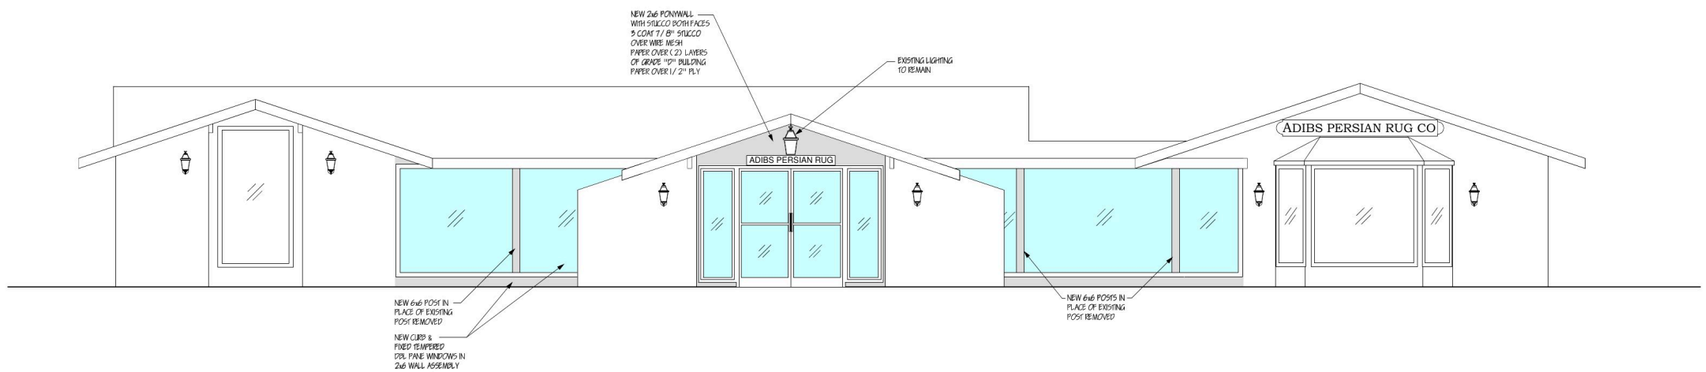

PROPOSED FRONT ELEVATION
SCALE: 1/ 4"=1'-0"

ATA ENGINEERING
Ali Adib, P.E.
1202 Main Street, Redwood City, CA 94063
Tel. 650.363.2338, Fax 650.363.2031, email: ala@ataeng.net

ELEVATIONS


REMODEL/ADDITION:
ADIB'S PERSIAN RUG CO
1426 S MAIN STREET
WALNUT CREEK,CA

DATE: 2024-08-10

A-3.1


OF SHEETS

A-3.1 Front elevations · Permit set ·
Open full size

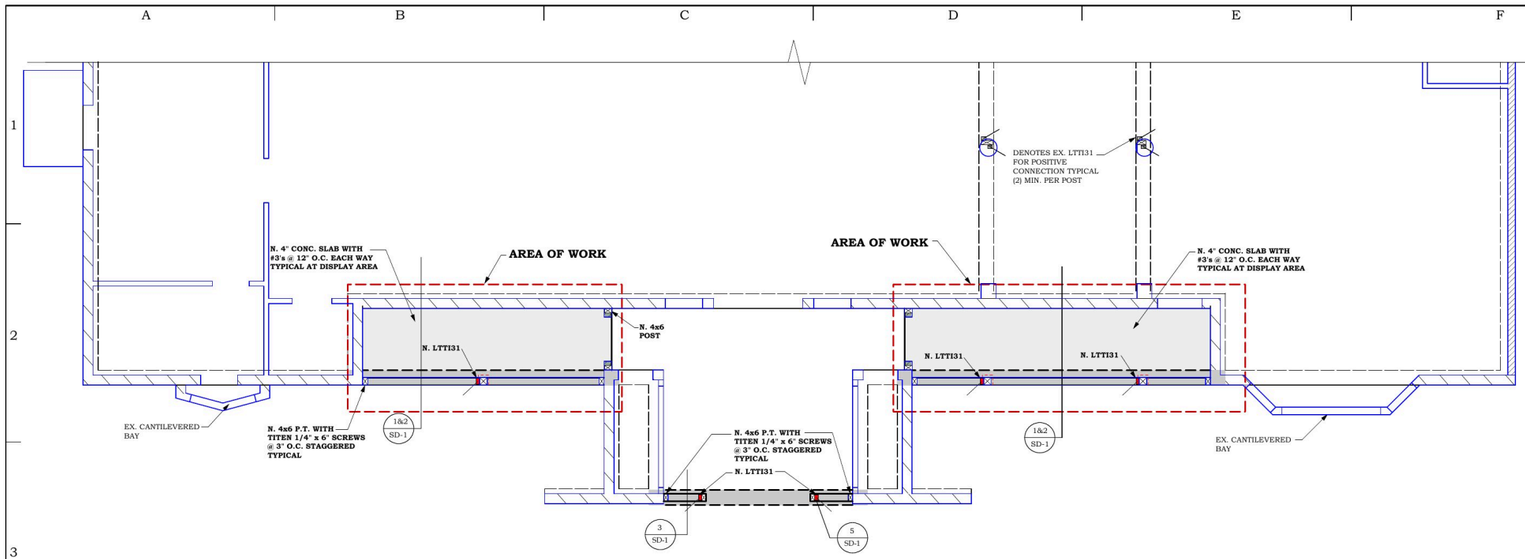

PARTIAL FOUNDATION PLAN

SCALE: 1/4"=1'-0"

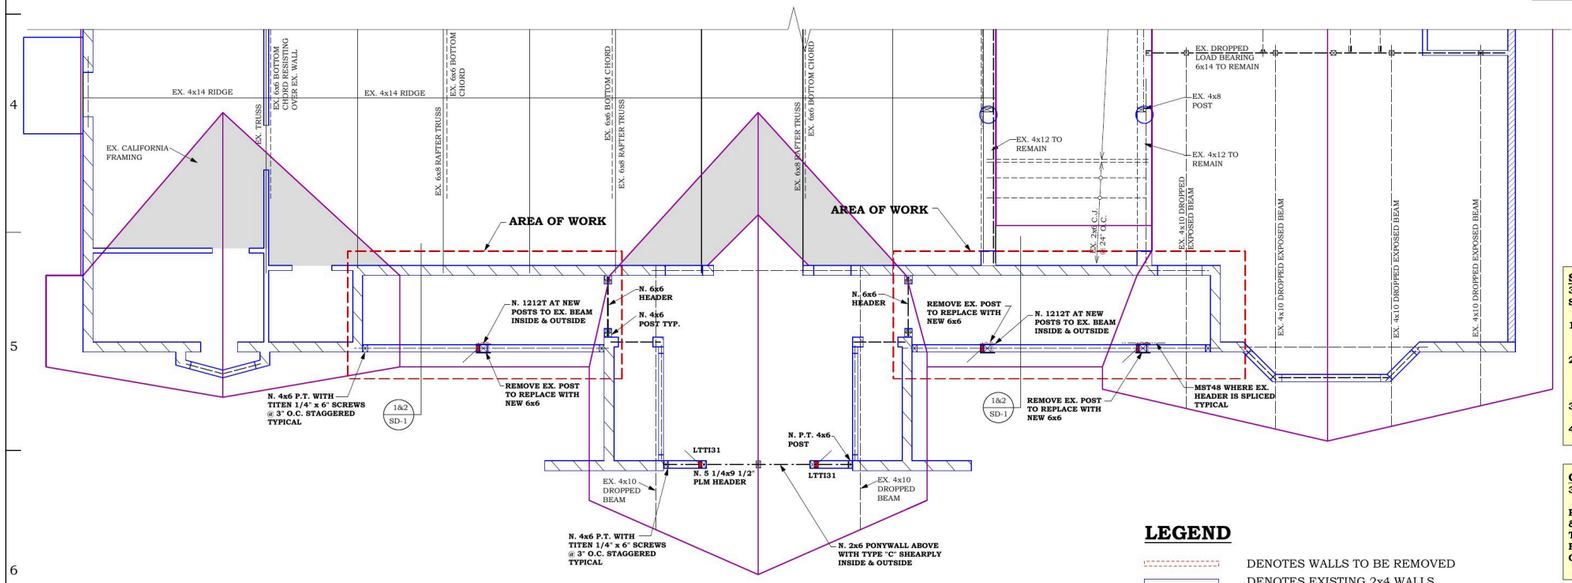

PARTIAL ROOF FRAMING PLAN

SCALE: 1/4"=1'-0"

LEGEND

- DENOTES WALLS TO BE REMOVED
- DENOTES EXISTING 2x4 WALLS
- DENOTES NEW 2x6 WALLS
- DENOTES EX. 2x6 WALLS
- DENOTES EX. 8" CMU WALLS

FOUNDATION NOTES:

Contractor shall verify all conditions shown on all drawings and immediately notify the engineer of any discrepancies.
Contractor shall meet with engineer at least 2 weeks prior to start of construction or demolition to review the project.

F1A) Denotes: Existing HDU5 at 4x posts typical u.n.o. Align holdowns with walls above. Do not scale location from this plan.

F1B) Denotes: New LTTI31 at new 6x6 posts.

F2A) *HOLDOWNS AT NEW FOUNDATION: See detail 5/SD1.*

F3A) ANCHOR BOLTS AT NEW FOUNDATION:
1. 5/8 " diameter ASTM A307 x 12" anchor bolts with BP5/8-3 & nut
2. A.B. shall be spaced at 48" o.c. maximum typ. u.n.o.
3. See note F4 for tighter spacing
4. 3x sill plates typical at all new foundation u.n.o.
5. Provide minimum (2) A.B. between holdowns

F4) Connectors for pressure treated lumber (nails, hangers, anchor bolts, plate washers, etc.) shall be hot dipped galvanized or stainless steel per C.B.C. 2304.9.5.
F5) All site and foundation work shall be done in accordance with 2022 C.B.C. chapter 18.
F6) All work shall conform with 2022 C.B.C. as well as applicable local codes in effect at the time of construction, including 2021 I.B.C.
F7) All framing shall conform with 2022 C.B.C., chapter 23.
F8) All nailing shall conform with 2022 C.B.C. table 2304.10.1
F9) During the placing of concrete, mushroomed concrete spillage at the sides of foundation should be trimmed to the design size of the fdn. respectively. Also, bottom of footings shall be clean of spoils.

GRAVITY DESIGN INFO

ROOF DL:	14 PSF.
ROOF LL:	20 PSF.
FLOOR DL:	N/A
FLOOR LL:	N/A
DECK DL:	N/A
DECK LL :	N/A

SOILS LOAD BEARING VALUES:

SOIL BEARING PRESSURE:	1,500 PSF

STRUCTURAL OBSERVATIONS BY ENGINEER:
3 BUSINESS DAY EMAILED NOTICE IS REQUIRED TO SCHEDULE SITE VISITS - ENGINEER TO OBSERVE:

1- FOUNDATION:
A) REBARS FOR ANY POUR AT 10%
B) REBARS FOR ANY POUR AT 100%
2- FRAMING:
A) ANY FLOOR SURFACE PRIOR TO PLYWOOD
B) ANY WALL SURFACE PRIOR TO PLYWOOD
C) ANY ROOF SURFACE PRIOR TO PLYWOOD
3- SHEARWALLS, HOLDOWNS, & POSITIVE CONNECTORS.
4- FINAL VISIT AFTER PLUMBING & ELECTRICAL

CONTRACTOR MUST CONTACT ENGINEER:
3 BUSINESS DAY EMAILED NOTICE IS REQUIRED:

PRIOR TO ORDERING ANY MATERIAL & AFTER THE STRUCTURE IS EXPOSED, THE ENGINEER & ARCHITECT SHALL REVIEW STRUCTURAL PLANS TO CONFIRM OR MODIFY PROPOSED STRUCTURAL DESIGN.

SCALE: 1/4" = 1'-0"

Ali Adib, P.E.
ATA ENGINEERING
1202 Main Street, Redwood City, CA 94063
Tel. 650.363.2338, Fax 650.363.2031, email: ata@ataeng.net

PARTIAL STRUCTURAL PLANS

REMODEL/ADDITION:
ADIB'S PERSIAN RUG CO
1426 S MAIN STREET
WALNUT CREEK, CA


DATE: 2024-08-10

S-1

OF SHEETS


S-1 Partial structural roof & foundation plans · Permit set ·

Open full size

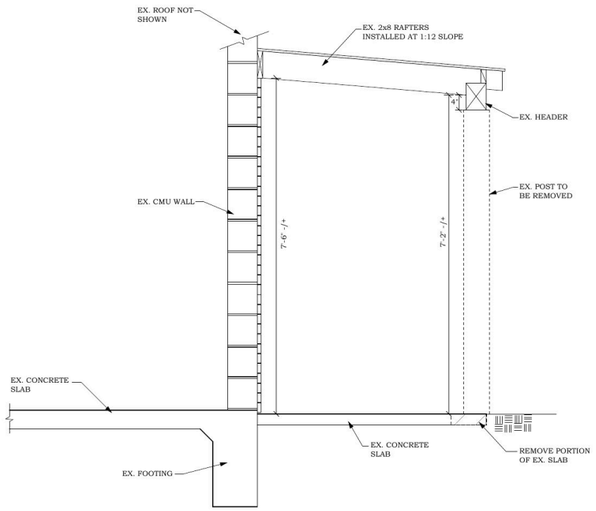


1 EXISTING PARTIAL SECTION

SCALE: 3/4"=1'-0"

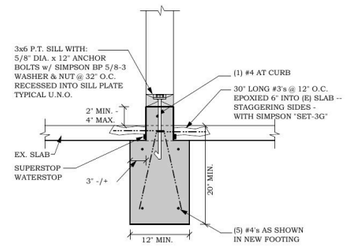


3 NEW FOOTING

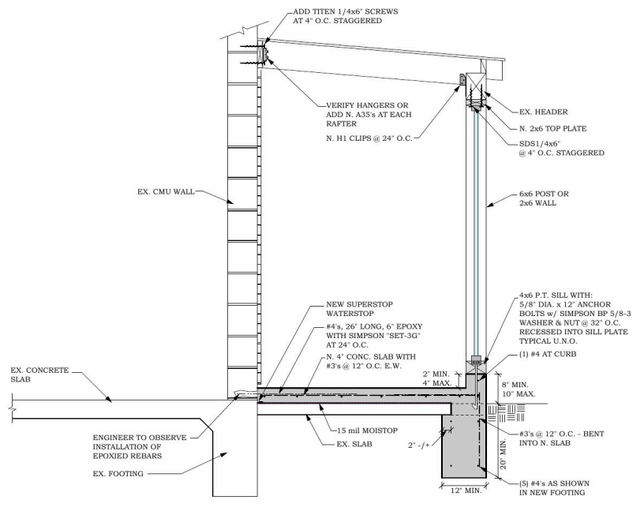

2 PROPOSED PARTIAL SECTION

SCALE: 3/4"=1'-0"

4

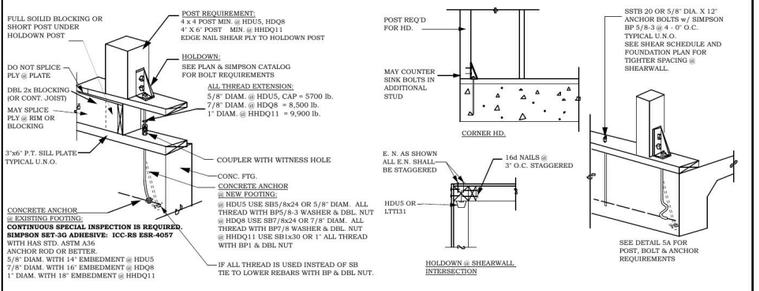

5A HOLDOWN - RAISED FLOOR - EXISTING OR NEW FOUNDATION

5B HOLDOWN - SLAB ON GRADE

5 NEW HOLDOWNS

STRUCTURAL NOTES:

CONTRACTOR IS RESPONSIBLE FOR ALL DIMENSIONS AND GRADES. CONTRACTOR SHALL VERIFY ALL CONDITIONS IN FIELD AND NOTIFY THIS OFFICE OF ANY DISCREPANCIES FOR CLARIFICATION AND/OR RESOLUTION, PRIOR TO COMMENCEMENT OF WORK. CONTRACTOR SHALL ALSO VERIFY EXISTING CONDITIONS AND REPORT TO THE ENGINEEER IF ANY OF THE FOLLOWING IS FOUND: 1) DIMENSIONS ARE INCORRECT, 2) THE EXISTING BUILDING IS OUT OF SQUARE LEVEL, 3) FOUNDATION IS CRACKED, 4) DRYROT OR TERMITE DAMAGE, 5) ANY EXISTING CONDITIONS NOT SHOWN ON THEW DRAWINGS.

CONTRACTOR SHALL MEET WITH THE ENGINEER AT LEAST 2 WEEKS PRIOR TO START OF CONSTRUCTION OR DEMOLITION. ENGINEER TO REVIEW FOUNDATION PRIOR TO CONCRETE POUR(S). ENGINEER SHALL ALSO REVIEW SHEAR WALLS AND HOLDOWNS. NOTIFY ENGINEER AT LEAST 72 HOURS IN ADVANCE.

ALL WORK SHALL CONFORM WITH 2022 CALIFORNIA BUILDING CODE & 2021 INTERNATIONAL BUILDING CODE AS WELL AS ALL APPLICABLE LOCAL CODES IN EFFECT AT THE TIME OF CONSTRUCTION.

CONCRETE:

S - 1. REGULAR WEIGHT HARD ROCK. MIN. 28 DAY COMPRESSIVE STRENGTH = 2500 psi AND MAX. SLUMP = 4 inch. USE TYPE II CEMENT PER ASTM C150. NO SPECIAL INSPECTION IS REQUIRED. WATER -CEMENT RATIO FOR INTERIOR SLABS SHALL BE MAXIMUM 0.45

S - 2. ALL CAST IN PLACE CONCRETE PIERS TO BE 2500 psi. - CONCRETE SPECIAL INSPECTION IS NOT REQUIRED

S - 3. CONCRETE COVER. MINIMUM COVER, inches (mm)

- **A.** Concrete cast against and permanently exposed to earth 3 (76)
- **B.** Concrete exposed to earth or weather:
  - No. 6 through No. 18 bar 2 (51)
  - No. 5 bar, W31 or D31 wire, and smaller..... 1 1/2 (38)
- **C.** Concrete not exposed to weather or in contact with ground:
  - Slabs, walls, joists:
    - No. 14 and No. 18 bar 1 1/2 (38)
    - No. 11 bar and smaller 3/4 (19)
  - Beams, columns:
    - Primary reinforcement, ties, stirrups, spirals 1 1/2 (38)
  - Shells, folded plate members:
    - No. 6 bar and larger 3/4 (19)
    - No. 5 bar, W31 or D31 wire, and smaller 1/2 (12.7)

STEEL:

S - 4. ASTM A-615 GRADE 40. SPLICES AND CORNER LAP 42 DIAMETER.

S - 5. ANCHOR BOLTS: ASTM A307 5/8" X 12" OR APPROVED EQUAL w/ SIMPSON BP 5/8-3 @ 48" O.C. UNLESS NOTED OTHERWISE.

FRAMING: MAY USE APPROVED EQUAL OSB INSTEAD OF PLYWOOD TYPICAL EXCEPT @ FLOORING

S - 6. ALL FRAMING TO CONFORM TO CHAPTER 23 2022 C.B.C.

S - 7. ALL NAILING TO CONFORM TO TABLE 2304.10.1 2022 C.B.C.

S - 8. **A)** SUB-FLOOR PLYWOOD: 3/4 INCH APA RATED T&G PLYWOOD 32/16 EXPOSURE 1 MINIMUM, GLUDED AND NAILED, TYPICAL U.N.O.
B) SUB-FLOOR NAILING: 10d NAILS @ 6" O.C. EDGE AND 10" O.C. FIELD.

S - 9. **A)** ROOF PLYWOOD: 5/8" PLYWOOD AT 24" O.C. RR, 1/2" PLYWOOD @ 16" O.C. RR SPACING. PLYWOOD SHALL BE APA RATED 24/0 EXPOSURE 1 MINIMUM, TYPICAL U.N.O.
B) ROOF NAILING: 8d COMMON NAILS @ 6" O.C. EDGE NAIL AND 12" O.C.FIELD.

S - 10. FRAMING LUMBER: DFL NO. 2 OR BETTER. THIS INCLUDES 2" THICK TO 12" WIDE.

S - 11. STRUCTURAL LUMBER: DFL NO. 1 OR BETTER. THIS INCLUDES 4" THICK OR THICKER, AND 6" WIDE OR WIDER. EXTERIOR BEAMS TO BE TREATED.

S - 12. ALL EXTERIOR FRAMING, OR IN DIRECT CONTACT WITH CONCRETE OR EXPOSED TO HIGH MOISTURE CONDITIONS SHALL BE PRESSURE PRESERVATIVE TREATED.

S - 13. ENGINEERED LUMBER: SUBMIT AITC CERTIFICATIONS TO BUILDING DEPARTMENT PRIOR TO ERECTION.
TJI PRO FLOOR JOISTS: ICC REPORT No. ESR-1153.
MICROLLAM: ICC REPORT No. ESR-1387,
BENDING STRESS: 2800 psi, SHEAR STRESS: 290 psi, E: 2,000 ksi.
PARALLAM: ICC REPORT No. ESR-1387,
BENDING STRESS: 2900 psi, SHEAR STRESS: 290 psi, E: 2,000 ksi.
GLULAM BEAMS: AIC 117 249V4. NO CAMBER U.N.O.

S - 14. SILL PLATES: ALL 3X PRESSURE TREATED TIMBER.

S - 15. DOUBLE FLOOR JOISTS UNDER ALL PARALLEL PARTITIONS TYPICAL U.N.O.

S - 16. PROVIDE SOLID BLOCKING UNDER ALL PERPENDICULAR PARTITIONS.

S - 17. WALL STUDS: USE 2" X 4" STUDS TO 10 FEET HIGH, 2" X 6" STUDS TO 16 FEET HIGH AND 2" X 8" STUDS TO 22 FEET HIGH (16' O.C. U.N.O.). - DOUBLE KING STUDS @ WALL ENDS FOR WALLS OVER 10 FEET.

S - 18. CONNECTORS: SIMPSON OR APPROVED EQUAL. THIS INCLUDES ANCHORS FOR SHEAR WALLS AND STRAP TIES.

S - 19. MANUFACTURED TRUSSES BALCONY AND STAIR RAILINGS TO BE PRE-ENGINEERED: SUBMIT PLANS AND CALCULATIONS TO THE APPROPRIATE AUTHORITY PRIOR TO INSTALLATION.

S - 20. PRE-MANUFACTURED SHEAR WALLS: CONTRACTOR TO THOROUGHLY REVIEW INSTALLATION SPECIFICATIONS PRIOR TO FORMING OF FOUNDATION.
HARDY FRAME: ICC REPORT No. ES-ESR-2089
SIMPSON STRONG-WALL: ICC REPORT No. ES-ESR-1267

S - 21. ALL SITE AND FOUNDATION WORK SHALL BE DONE IN ACCORDANCE WITH 2022 C.B.C CHAPTER 18

S - 22. ALL NEW FRAMING LUMBER SHALL HAVE 19% MAX MOISTURE CONTENT @ INSTALLATION

S - 23. CONNECTORS FOR PRESSURE TREATED LUMBER (NAILS, HANGERS, ANCHOR BOLTS, PLATE WASHERS, ETC) SHALL BE HOT DIPPED GALVINIZED STAINLESS STEEL SILICON BRONZE OR COPPER PER 2022 CBC 2304 9.5.

S - 24. CHOROMATED COPPER ARSENATE (CCA) AS A PRESERVATIVE FOR WOOD (GREEN WOOD) INTENDED FOR RESIDENTIAL USE IS NOT ACCEPTABLE.

S-25 THAT SPECIAL INSPECTION PER 2022 CBC CHAPTER 17 IS REQUIRED FOR THE FOLLOWING:

- **A.** Shop and field structural welding.
- **B.** Construction of drilled piers or piles (driving of piles; drilling of piers, testing of piles). Note that these special inspections are normally provided by the geotechnical engineer and are in addition to concrete and rebar placement special inspections, for piers provide special inspection for concrete pier compression per CBC 1808-2-22.
- **C.** Observation of soil excavation and foundation construction operations by geotechnical engineer.
- **D.** Holdown rods epoxied into ex. foundation- see 1/SD1.
- **E.** Special inspection is required on all welding.
- **F.** Special inspection for epoxied holdowns.
- **G.** Special inspection for shearwalls 4" or less nailing.

SHEAR WALL NAILING SCHEDULE ** USE 1/2" PLYWOOD AT STUCCO WALLS. (See note S-5)

TYPE	NAILING	ANCHOR BOLT SPACING
A	3/8 INCH CDX W/ 8d @ 6" O.C. EDGES & SILL, 12" O.C. FIELD. CAP = 244 PLF	48" O.C.
B	3/8 INCH CDX W/ 8d @ 4" O.C. EDGES & SILL, (@ 3x STUDS , & PLATE, STAGGER NAILING) 12" O.C. FIELD. CAP = 350 PLF	32" O.C.
C	3/8 INCH CDX W/ 8d @ 3" O.C. EDGES & SILL, (@ 3x STUDS & PLATE, STAGGER NAILING) 12" O.C. FIELD CAP = 490 PLF.	16" O.C.
E	1/2 INCH STRUCTURAL 1 PLYWOOD W/ 10d @ 2" O.C. EDGES & SILL (@ 3x STUDS & PLATE, STAGGER NAILING) 12" O.C. FIELD. CAP = 870 PLF.	12" O.C.

** USE 1/2" PLYWOOD AT STUCCO WALLS.

SW-1. AT TYPES "B", "C", & "E" SHEARWALLS, FOUNDATION SILL PLATES AND ALL FRAMING MEMBERS RECEIVING EDGE NAILING FROM ABUTTING PANELS SHALL NOT BE LESS THAN 3" NOMINAL AND NAILS SHALL BE STAGGERED.

SW-2. WHERE PLYWOOD IS APPLIED ON BOTH FACES OF A WALL AND NAIL SPACING IS LESS THAN 6" O.C. ON EITHER SIDE, PANEL JOINTS SHALL BE ON 3" NOMINAL OR THICKER FRAMING AND NAILS ON EACH SIDE SHALL BE STAGGERED.

SW-3. FOR CONNECTION OF SOLE PLATES AT INTERIOR WALLS, SEE DETAILS 9, 10 & 11

SW-4. SEE NOTE S-5, THIS SHEET, FOR TYPICAL A.B. SPACING AND TABLE ABOVE FOR TIGHTER A.B. SPACING AT SHEARWALLS. TIGHTER SPACING SHOWN ON FOUNDATION PLAN GOVERSN OVER TABLE BELOW. PROVIDE MINIMUM (2)A.B. BETWEEN HOLDOWNS UNDER SHEARWALLS.

SW-5. MINIMUM SHEET DIMENSION FOR A PLYWOOD PANEL SHALL BE 24" UNLESS ALL EDGES OF UNDERSIZED SHEETS ARE SUPPORTED BY FRAMING MEMBERS OR BLOCKING PER SECTION 2315.5.3.

SW-6. USE COMMON NAIL FOR SHEAR NAILING. NAIL HEAD NOT TO PENETRATE PLYWOOD SURFACE, NO NAIL GUN IS ALLOWED AT SHEARWALLS.

SW-7. ALL NAILING SHALL BE STAGGERED.

THE ENGINEER EXPRESSLY RESERVES ITS COMMON LAW COPYRIGHT AND OTHER PROPERTY RIGHTS IN THESE PLANS. THESE PLANS ARE NOT TO BE REPRODUCED, ALTERED, OR COPIED IN ANY FORM OR MANNER WHATSOEVER, NOR ARE THEY TO BE ASSIGNED TO A THIRD PARTY WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION AND CONSENT OF THE ENGINEER. IN THE EVENT OF UNAUTHORIZED REUSE OF THESE PLANS BY A THIRD PARTY, THE ENGINEER SHALL BE HELD HARMLESS.

ATA ENGINEERING
Ali Ashi, P.E.
1202 Main Street, Redwood City, CA 94063
Tel. 650.363.2338, Fax 650.363.2031, email: ali@ataeng.net

STRUCTURAL DETAILS & NOTES

REGISTERED PROFESSIONAL ENGINEER Ali Ashi No. C49976 Exp. 6-30-25 CIVIL STATE OF CALIFORNIA

PLANS ARE FAVORABLY REVIEWED FOR COMPLIANCE WITH STRUCTURAL CALCULATIONS ONLY.

REMODEL/ADDITION:
ADIB'S PERSIAN RUG CO
1426 S MAIN STREET
WALNUT CREEK,CA


DATE: 2024-08-10

SD-1

OF SHEETS


SD-1 Structural sections, details & notes · Permit set ·

Open full size

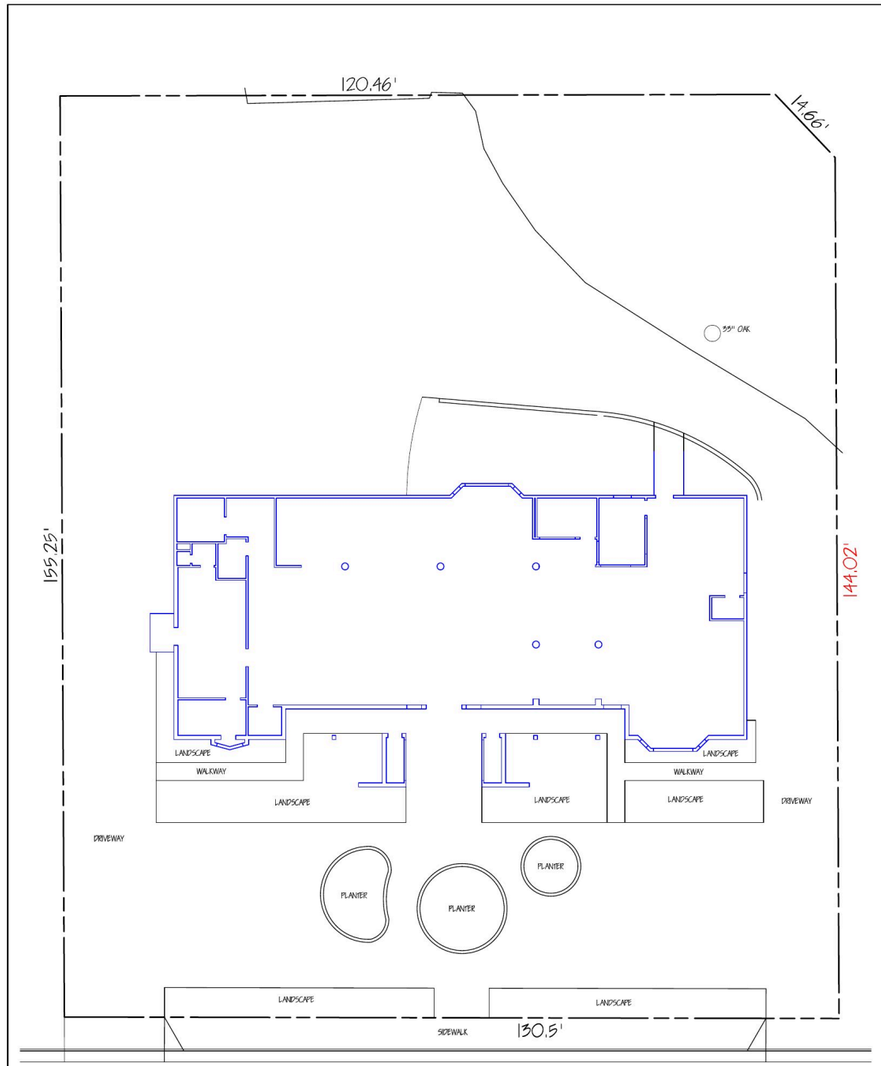

SOUTH MAIN STREET

EXISTING SITE PLAN
SCALE: 1"=10'-0"

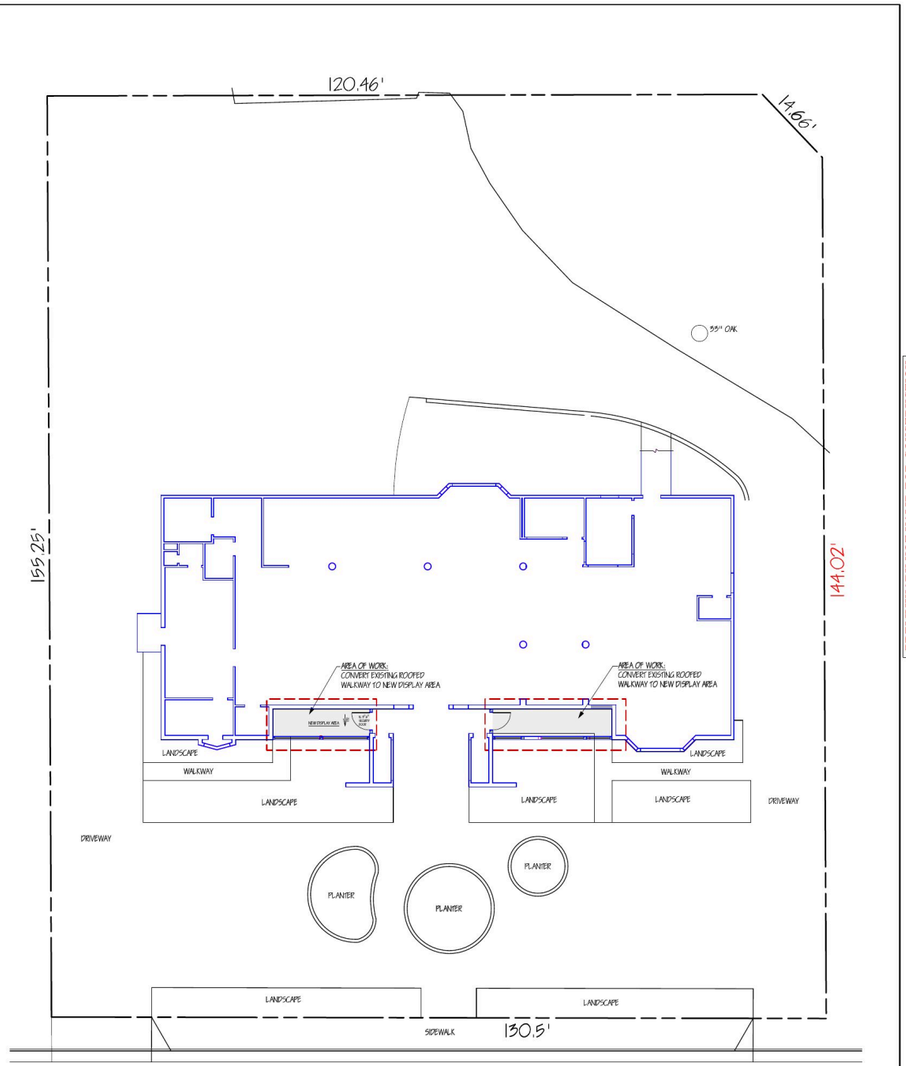

SOUTH MAIN STREET

PROPOSED SITE PLAN
SCALE: 1"=10'-0"

NO CHANGES ARE PROPOSED TO SITE PLAN

PRELIMINARY NOT VALID FOR CONSTRUCTION
FOR BIDDING PURPOSES ONLY

EXISTING & PROPOSED
SITE PLAN

ATA
ENGINEERING
Ali Adib, P.E.
1202 Main Street, Redwood City, CA 94063
Tel. 650.363.2338, Fax 650.363.2031, email: ata@ataeng.net

REGISTERED PROFESSIONAL ENGINEER
ALI ADIB
NO. CE49976
Exp. 6-30-25
CIVIL
STATE OF CALIFORNIA


REMODEL/ADDITION:
ADIB'S PERSIAN RUG CO
1426 S MAIN STREET
WALNUT CREEK,CA

DATE: 2024-08-05

A-0.3

OF SHEETS

A-0.3 Existing & proposed site plan · Bidding set 2024-08-05 ·
Open full size

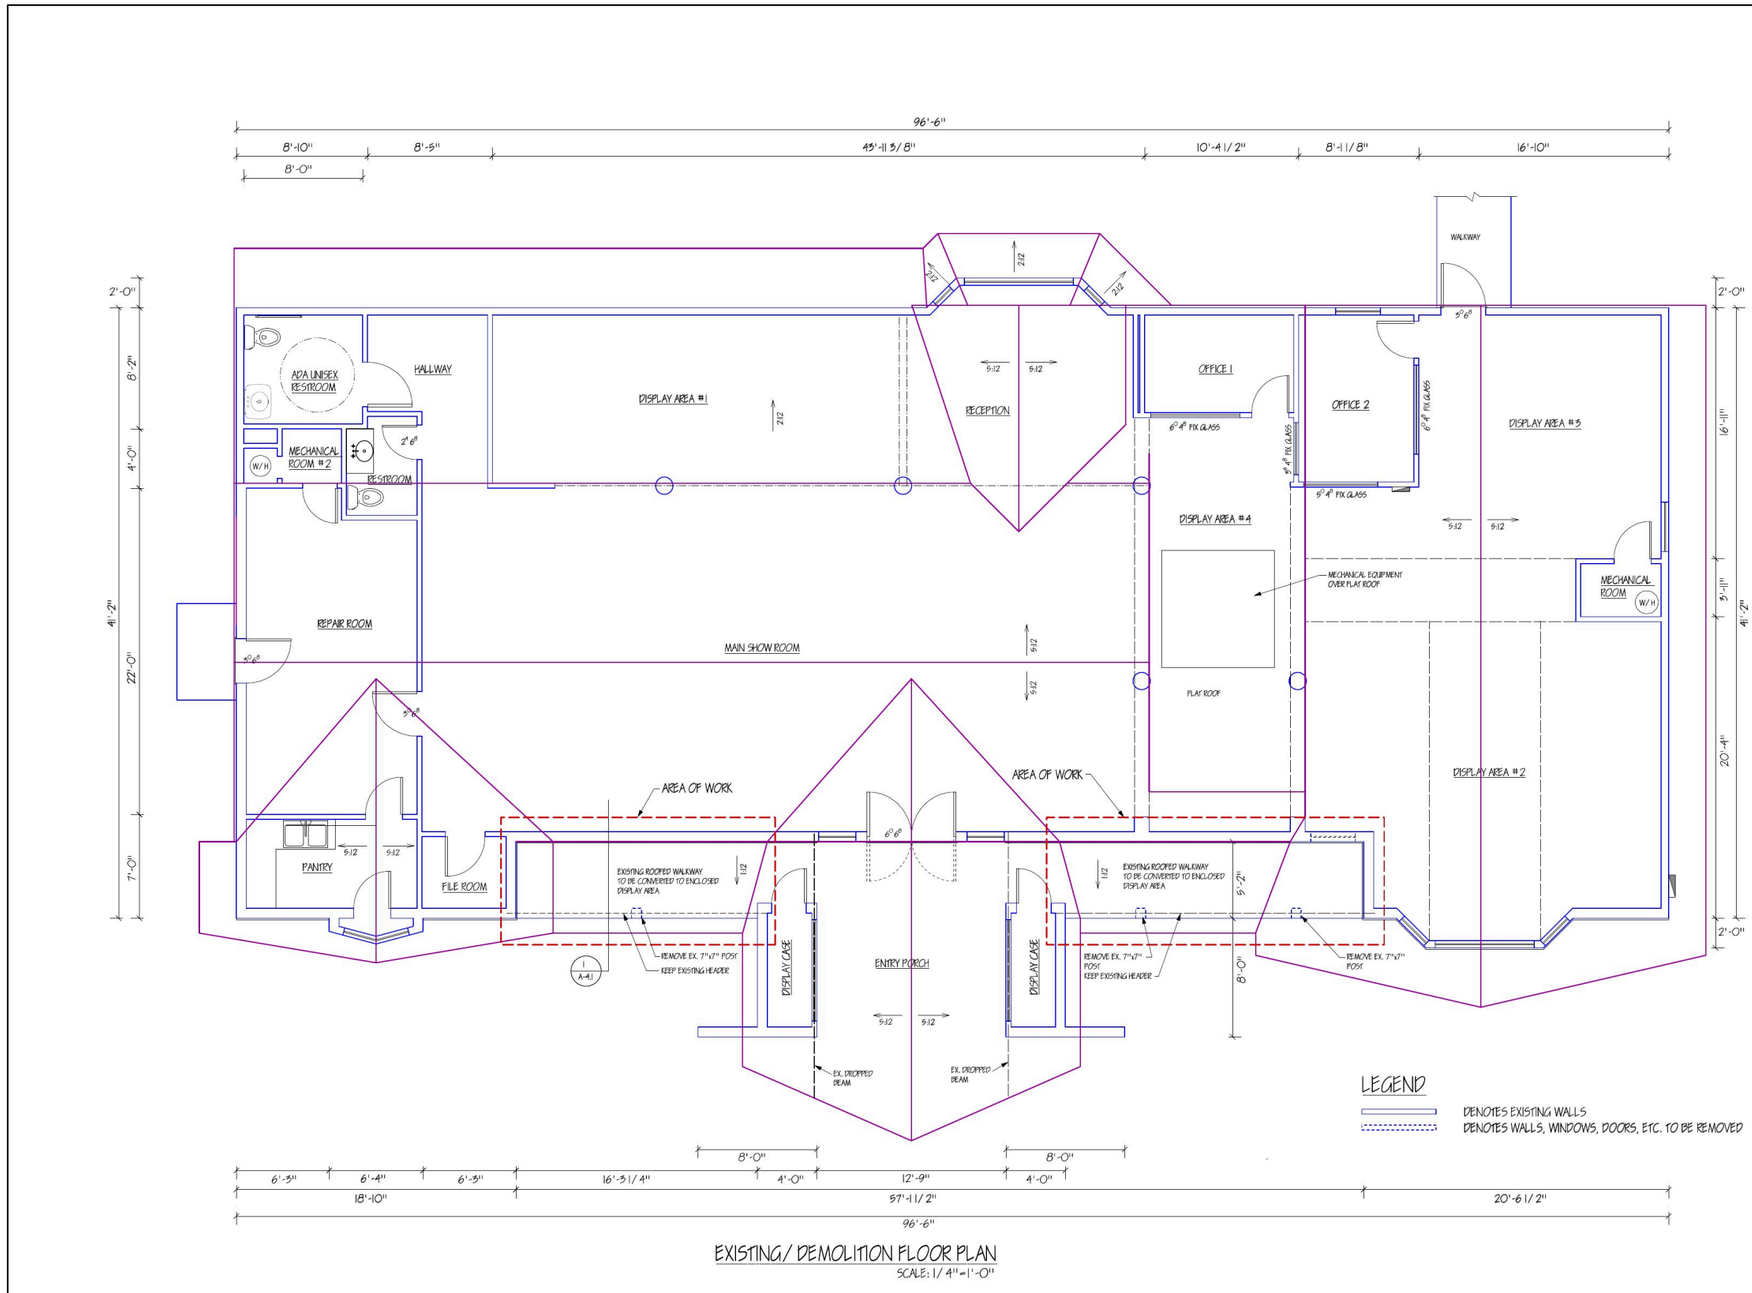

EXISTING/ DEMOLITION FLOOR PLAN
SCALE: 1/ 4"=1'-0"

PRELIMINARY NOT VALID FOR CONSTRUCTION
FOR BIDDING PURPOSES ONLY

ATA ENGINEERING
Ali Ashfa, P.E.
1202 Main Street, Redwood City, CA 94063
Tel. 650.363.2338, Fax 650.363.2031, email: ata@ataeng.net

EXISTING/DEMOLITION FLOOR PLAN

ALI ASHFA NO. CE49976 Exp. 6-30-25 CIVIL STATE OF CALIFORNIA


REMODEL/ADDITION:
ADIB'S PERSIAN RUG CO
1426 S MAIN STREET
WALNUT CREEK,CA

DATE: 2024-08-05

A-1.1

OF SHEETS

A-1.1 Existing / demolition floor plan, whole building · Bidding set ·
Open full size

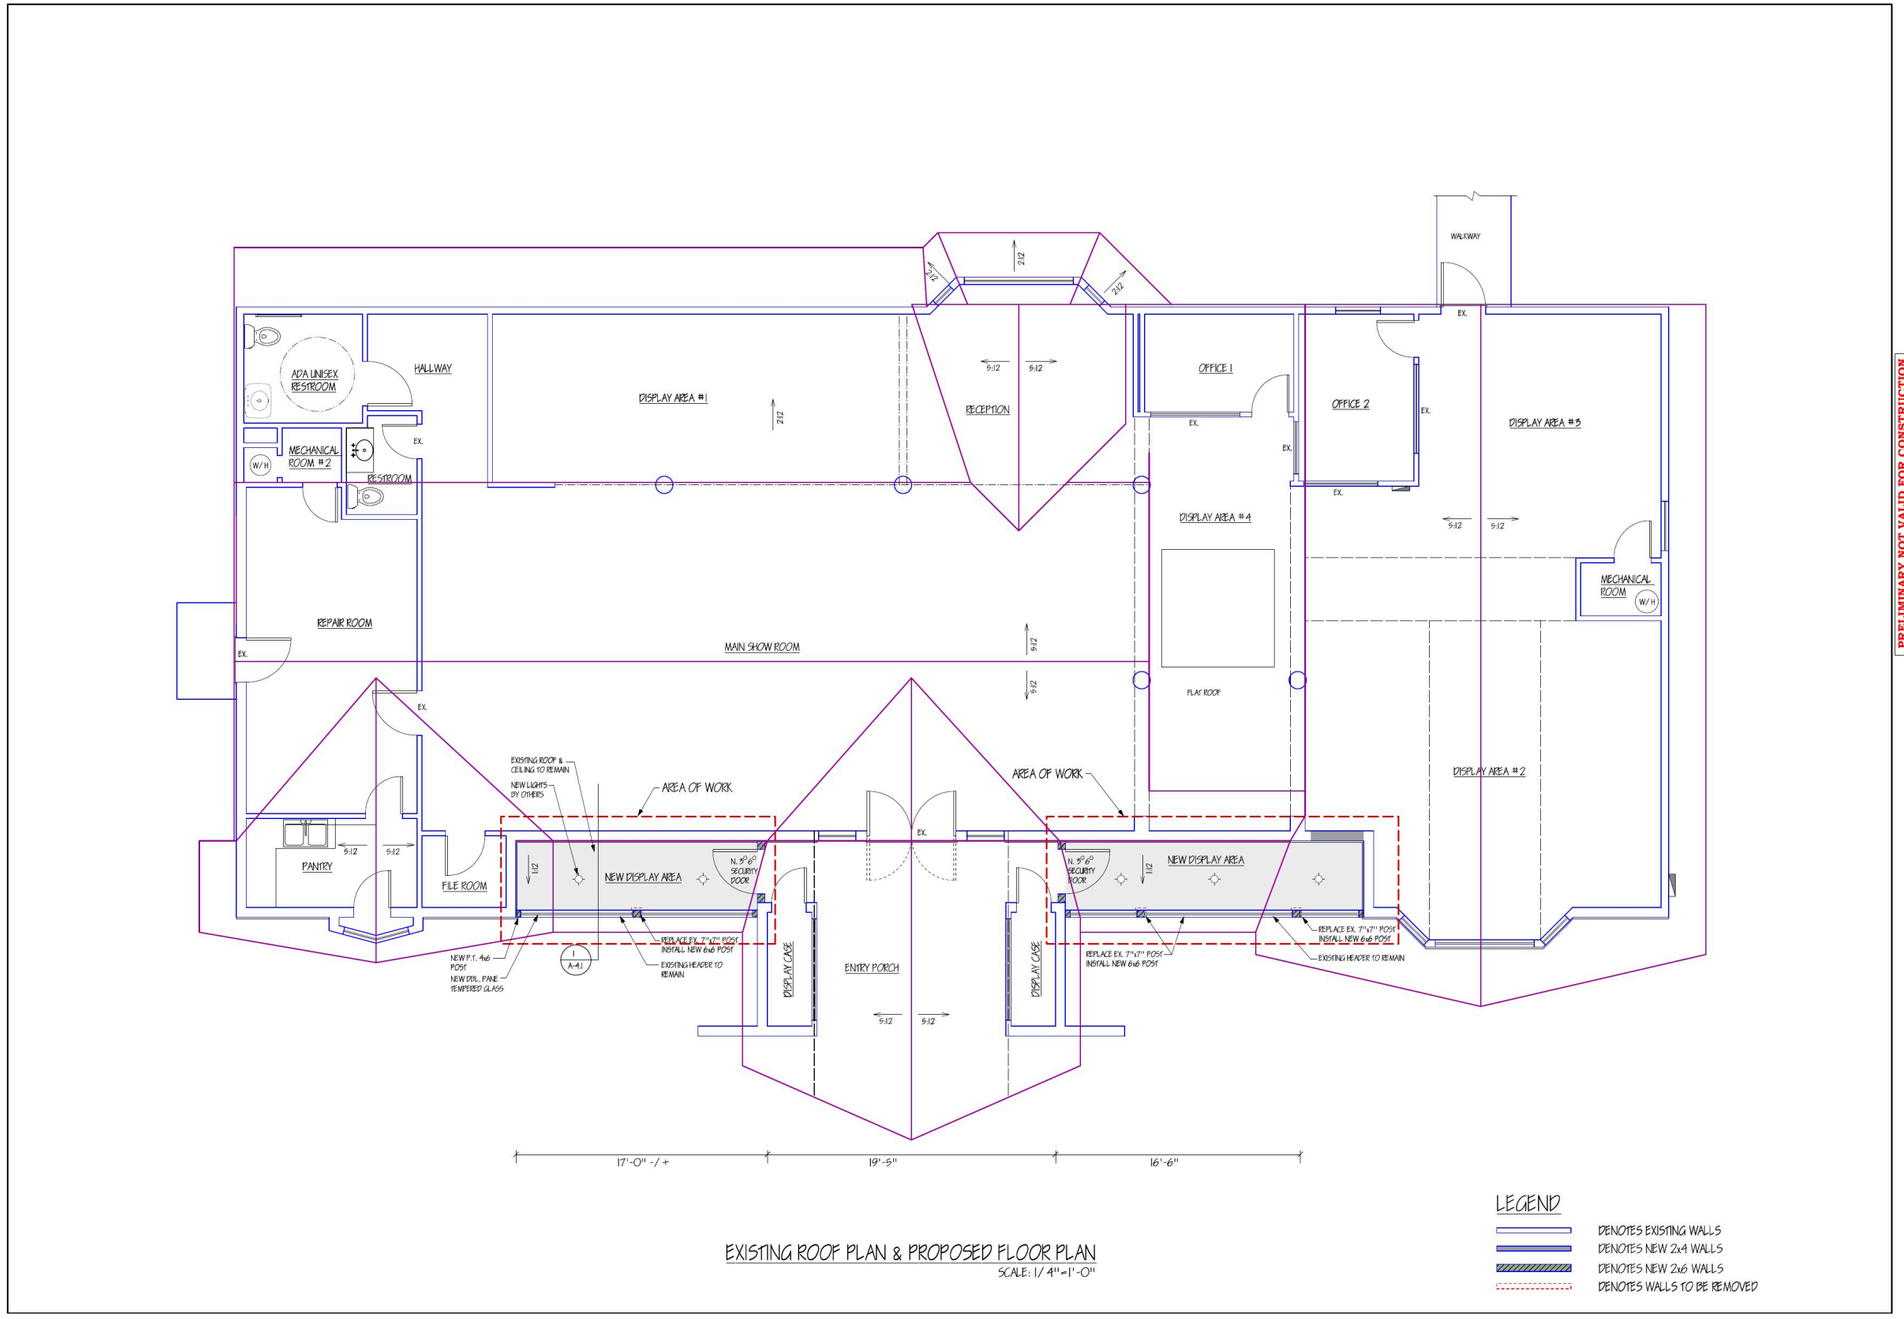

PRELIMINARY NOT VALID FOR CONSTRUCTION
FOR BIDDING PURPOSES ONLY

ATA
ENGINEERING
Ali Adib, P.E.
1202 Main Street, Redwood City, CA 94063
Tel. 650.363.2338, Fax 650.363.2031, email: ata@ataeng.net

PROPOSED FLOOR PLAN

REGISTERED PROFESSIONAL ENGINEER
ALI ADIB
NO. CE49976
Exp. 6-30-25
CIVIL
STATE OF CALIFORNIA


REMODEL/ADDITION:
ADIB'S PERSIAN RUG CO
1426 S MAIN STREET
WALNUT CREEK,CA

DATE: 2024-08-05


A-2.1

OF SHEETS

A-2.1 Proposed floor plan, whole building · Bidding set ·
Open full size

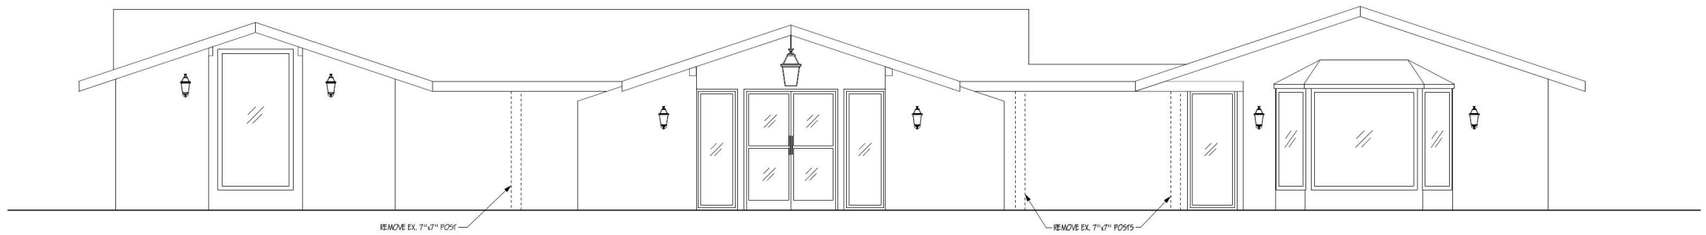

EXISTING FRONT ELEVATION
SCALE: 1/ 4"=1'-0"

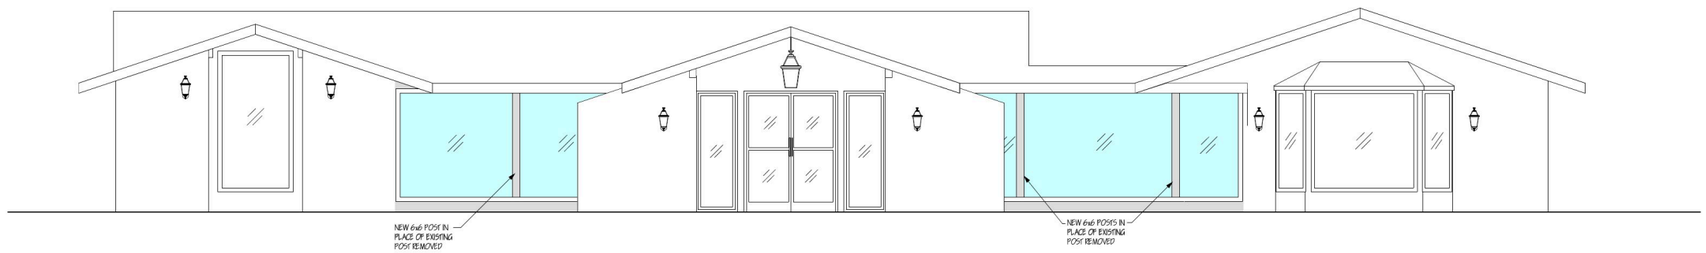

PROPOSED FRONT ELEVATION
SCALE: 1/ 4"=1'-0"

PRELIMINARY NOT VALID FOR CONSTRUCTION
FOR BIDDING PURPOSES ONLY

ELEVATIONS

ATA
ENGINEERING
Ali Adib, P.E.
1202 Main Street, Redwood City, CA 94063
Tel. 650.363.2338, Fax 650.363.2031, email: ata@ataeng.net

ALI ADIB
NO. CE49976
Exp. 8-30-25
CIVIL
STATE OF CALIFORNIA


REMODEL/ADDITION:
ADIB'S PERSIAN RUG CO
1426 S MAIN STREET
WALNUT CREEK,CA

DATE: 2024-08-05

A-3.1


OF SHEETS

A-3.1 Elevations · Bidding set ·
Open full size

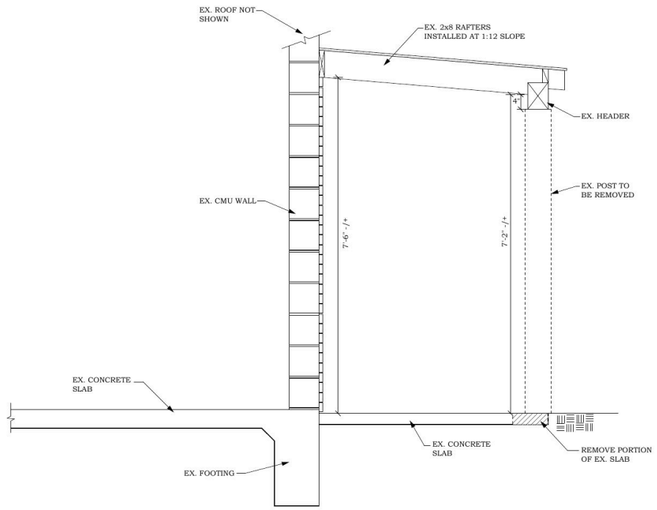

1 EXISTING PARTIAL SECTION

SCALE: 3/4"=1'-0"

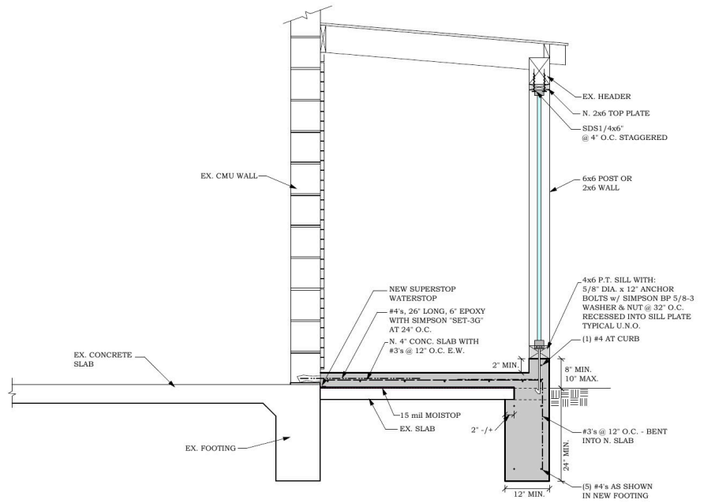

2 PROPOSED PARTIAL SECTION

SCALE: 3/4"=1'-0"

PRELIMINARY NOT VALID FOR CONSTRUCTION
FOR BIDDING PURPOSES ONLY

SECTIONS

ATA ENGINEERING
Ali Adib, P.E.
1202 Main Street, Redwood City, CA 94063
Tel. 650.363.2338, Fax 650.363.2031, email: ata@ataeng.net

REGISTERED PROFESSIONAL ENGINEER
ALI ADIB
NO. CE49976
Exp. 6-30-25
CIVIL
STRUCTURAL

REMODEL/ADDITION:
ADIB'S PERSIAN RUG CO
1426 S MAIN STREET
WALNUT CREEK,CA


DATE: 2024-08-05

A-4.1

OF SHEETS

A-4.1 Sections · Bidding set ·

Open full size

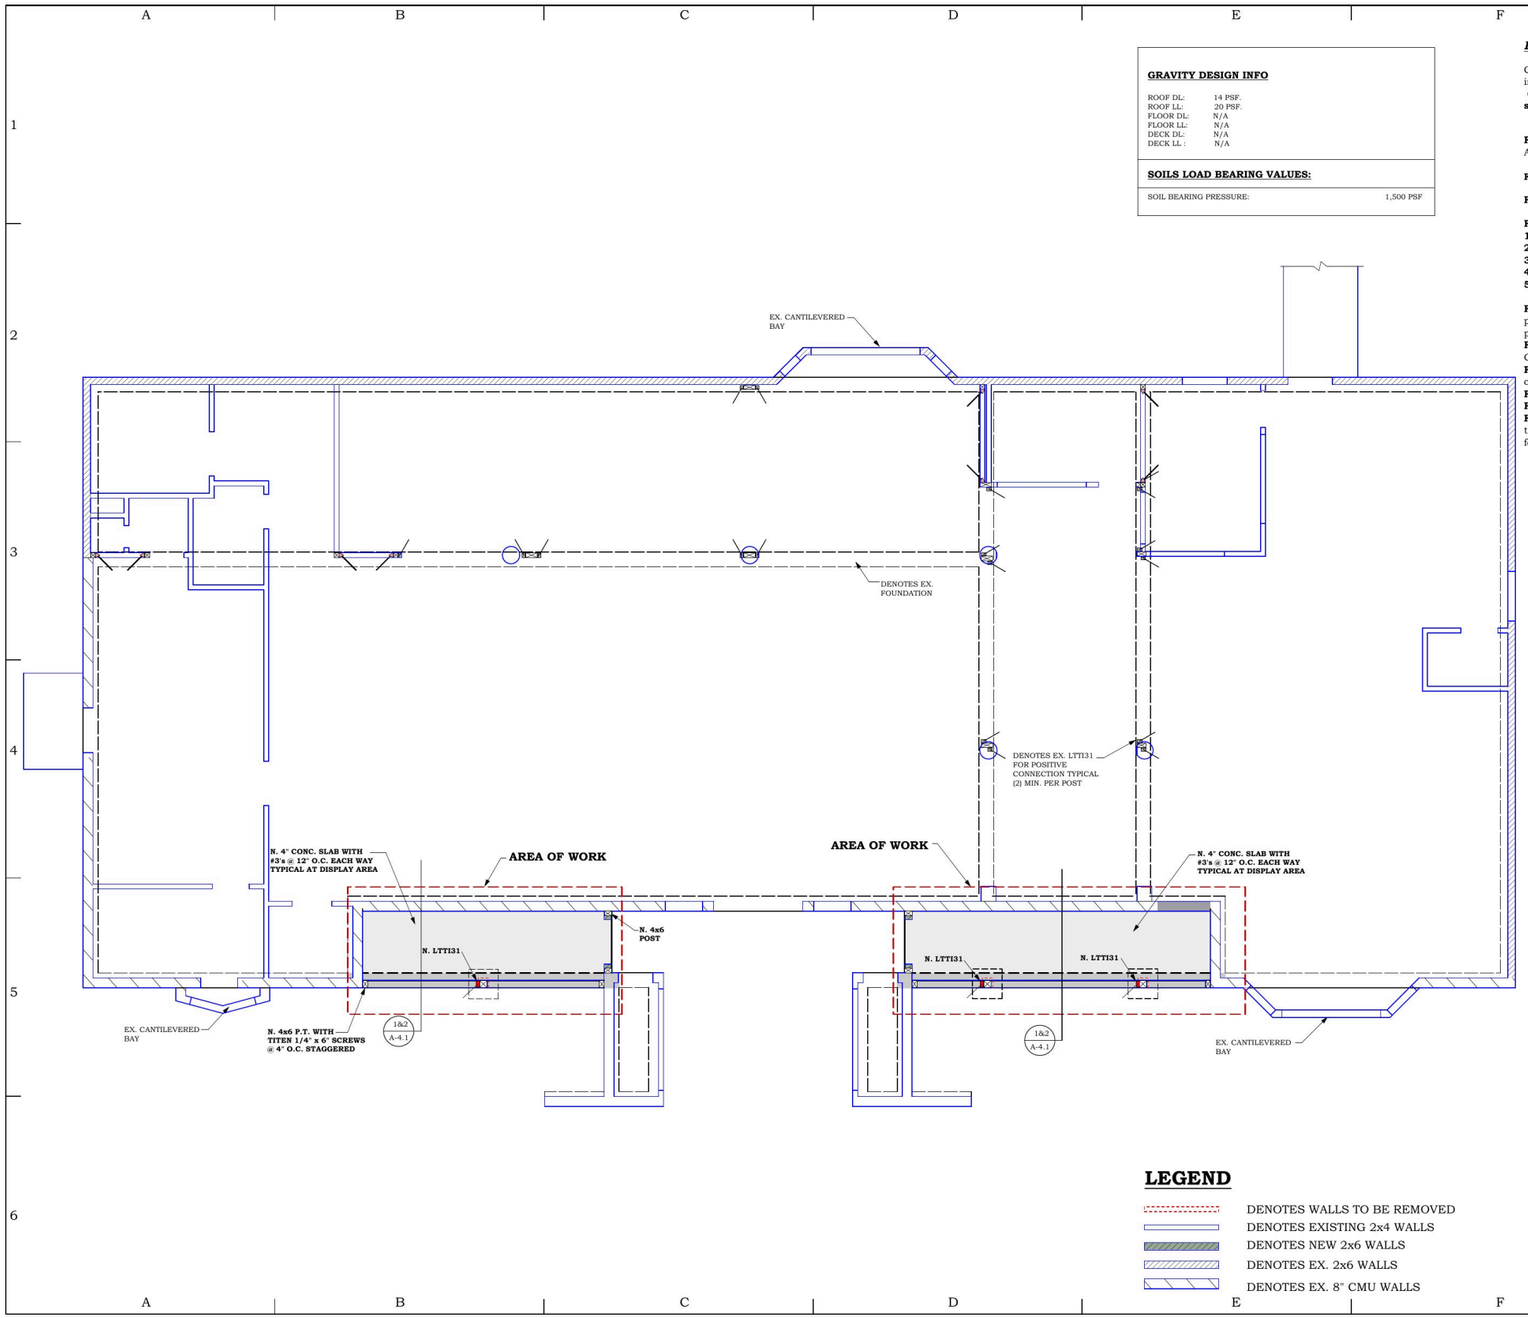

GRAVITY DESIGN INFO

ROOF DL:	14 PSF.
ROOF LL:	20 PSF.
FLOOR DL:	N/A
FLOOR LL:	N/A
DECK DL:	N/A
DECK LL :	N/A

SOILS LOAD BEARING VALUES:

SOIL BEARING PRESSURE:	1,500 PSF

FOUNDATION NOTES:

Contractor shall verify all conditions shown on all drawings and immediately notify the engineer of any discrepancies.
Contractor shall meet with engineer at least 2 weeks prior to start of construction or demolition to review the project.

F1A) Denotes: Existing HDU5 at 4x posts typical u.n.o. Align holdowns with walls above. Do not scale location from this plan.

F1B) Denotes: New LTTI31 at new 6x6 posts.

F2A) *HOLDOWNS AT NEW FOUNDATION: See detail 1/SD1.*

F3A) ANCHOR BOLTS AT NEW FOUNDATION:
1. 5/8 " diameter ASTM A307 x 12" anchor bolts with BP5/8-3 & nut
2. A.B. shall be spaced at 48" o.c. maximum typ. u.n.o.
3. See note F4 for tighter spacing
4. 3x sill plates typical at all new foundation u.n.o.
5. Provide minimum (2) A.B. between holdowns

F4) Connectors for pressure treated lumber (nails, hangers, anchor bolts, plate washers, etc.) shall be hot dipped galvanized or stainless steel per C.B.C. 2304.9.5.
F5) All site and foundation work shall be done in accordance with 2022 C.B.C. chapter 18.
F6) All work shall conform with 2022 C.B.C. as well as applicable local codes in effect at the time of construction, including 2021 I.B.C.
F7) All framing shall conform with 2022 C.B.C., chapter 23.
F8) All nailing shall conform with 2022 C.B.C. table 2304.10.1
F9) During the placing of concrete, mushroomed concrete spillage at the sides of foundation should be trimmed to the design size of the fdn. respectively. Also, bottom of footings shall be clean of spoils.

STRUCTURAL OBSERVATIONS BY ENGINEER:
3 BUSINESS DAY EMAILED NOTICE IS REQUIRED TO SCHEDULE SITE VISITS - ENGINEER TO OBSERVE:

1- FOUNDATION:
A) REBARS FOR ANY POUR AT 10%
B) REBARS FOR ANY POUR AT 100%
2- FRAMING:
A) ANY FLOOR SURFACE PRIOR TO PLYWOOD
B) ANY WALL SURFACE PRIOR TO PLYWOOD
C) ANY ROOF SURFACE PRIOR TO PLYWOOD
3- SHEARWALLS, HOLDOWNS, & POSITIVE CONNECTORS.
4- FINAL VISIT AFTER PLUMBING & ELECTRICAL

CONTRACTOR MUST CONTACT ENGINEER:
3 BUSINESS DAY EMAILED NOTICE IS REQUIRED:

PRIOR TO ORDERING ANY MATERIAL & AFTER THE STRUCTURE IS EXPOSED, THE ENGINEER & ARCHITECT SHALL REVIEW STRUCTURAL PLANS TO CONFIRM OR MODIFY PROPOSED STRUCTURAL DESIGN.

LEGEND

- DENOTES WALLS TO BE REMOVED
- DENOTES EXISTING 2x4 WALLS
- DENOTES NEW 2x6 WALLS
- DENOTES EX. 2x6 WALLS
- DENOTES EX. 8" CMU WALLS

SCALE: 1/4" = 1'-0"

PRELIMINARY NOT VALID FOR CONSTRUCTION FOR BIDDING PURPOSES ONLY

ATA ENGINEERING
Ali Adib, P.E.
1202 Main Street, Redwood City, CA 94063
Tel. 650.363.2338, Fax 650.363.2031, email: ata@ataeng.net

FOUNDATION PLAN

REMODEL/ADDITION:
ADIB'S PERSIAN RUG CO
1426 S MAIN STREET
WALNUT CREEK,CA

DATE: 2024-08-05

S-1

OF SHEETS

S-1 Foundation plan · Bidding set ·

Open full size

ROOF FRAMING NOTES:

R1) Contractor to verify all point loads to be chased to framing or foundation

R2) *EXTERIOR WALLS:* *(typical unless noted otherwise)*
studs to 10' max 2x4 at 16" o.c.
studs to 16' max 2x6 at 16" o.c.
1. Gable end walls shall be balloon framed at vaulted ceiling
with minimum (2) 2x king studs. Note 4x posts are required at holdowns.
2. All new plumbing walls shall be 2x6 at 16" o.c.

R3) *HEADERS:* *(typical unless noted otherwise)*
1. Headers are DFL, No. 1,
2. Engineered lumber such as PLM is preferred to minimize shrinkage
3. Double jack studs min. at spans over 5'
(4x posts are required at shearwall ends to tie holdowns)
4. At spans over 5', headers to tie to jack posts with A35's or LTP4's.
A) 2X4 WALLS;
Exterior and Interior bearing walls: 4x8 to 4' span, 4x10 to 10', 4x12 to 14'
Interior non-bearing walls, 4x8 to 6' span, 4x6 to 3' span
B) 2X6 WALLS;
Exterior and Interior bearing walls: 6x8 to 4' span, 6x10 to 11', 6x12 to 15'
Interior non-bearing walls, 6x8 to 7' span, 6x6 to 4' span

R4) *HANGERS* *(typical unless noted otherwise)*:
A) RAFTERS: all new rafters are to receive hangers as follows
2x6 rafters: A35,
2x8 rafters: LS70 typical, may use A35's to 6' span,
2x10 rafters: LS90 typical, may use LS70 to 12' span, A35's to 6' span,
B) *RIDGE TO HIPS:*
HRC hangers or (2) LS90's at 10" deep members, (2) LS70's at 8" deep members
C) FLUSH ROOF OR CEILING BEAMS:
Flush Parallams: HGUS
Flush DFL: HUS

R5) *POSTS* *(typical unless noted otherwise)*:
1. Posts shall not break through double top plates.
Spilce post at top plates, clip posts to plates with (2) A35's
2. Posts can be solid members or multiple studs
nailed with 16d at 12" o.c per lap, (solid posts at HD's)
3. Posts to match thickness of walls and width of beams they are supporting;
for example:4x6 at 2x4 wall supporting 6x beam, etc.
4. Posts supporting Ridge beams, hips, valleys or kickers
shall have PC, EPC or (2) A35's or (2) LPT4's
5. Provide beams, solid blkg or posts to transfer loads to fdn or framing below

6. ○ denote kicker posts. These are tilted posts to 45 degrees from vertical max. Connect top and bottom of kickers with (2) A35's

R6) *COLLECTORS* *(typical unless noted otherwise)*:
1. PARALLEL FRAMING ELEMENTS SUCH AS JOISTS OR BEAMS:
4" Edge nail to collector element, strap at splices as shown on the plans
2. PERPENDICULAR FRAMING ELEMENTS:
2x4 flat or solid block & use continuous collector straps as shown on the plans

R7) *RIDGE BEAMS* *(typical unless noted otherwise)*:
All existing to remain.

R8) *RAFTERS* *(typical unless noted otherwise)*:
All existing to remain.


R8) *CEILING JOISTS* *(typical unless noted otherwise)*:
All existing to remain.

SHEARWALL NOTES:

S1) ╲ **Where shown on roof framing plan:**
1. Existing HDU5 at 4x posts typical u.n.o. See foundation plan for size.
2. See details 1-4 sheet SD1.
3. Holdowns are to be installed at bottom of walls.

S2) ◯ Indicates existing shear wall plywood & nailing schedule. Type "A" on all new exterior walls, typical u.n.o. See sheet SD-1 for nailing schedule.

S3) 3X Plates required:
At type "B", "C" and "E" shearwalls, 3x nominal studs and plates are to be used at edge nailing and where panels adjoin. Top plates may be (2) 2x.
See sheet SD1 details and notes and other detail sheets for shearwall detail.
S4) Run shear wall plywood continuously at wall "T" intersections.
S5) Provide shear transfer to roof & through floor framing:
1. Extend plywood to roof and provide shear transfer hardware
2. See sheet SD1 details and notes and other shear transfer details.
S6) Use *(1) MSTA36* strap per top plate:
1. at existing to new top plates
2. both or one top plate is cut where top plate detail 13/SD1 is not satisfied
3. top plates are at different elevations, see detail 14b/SD1
4. Gable walls: (1) MSTA36 over ridge line
S7) Engineer to review shearwalls and holdowns.

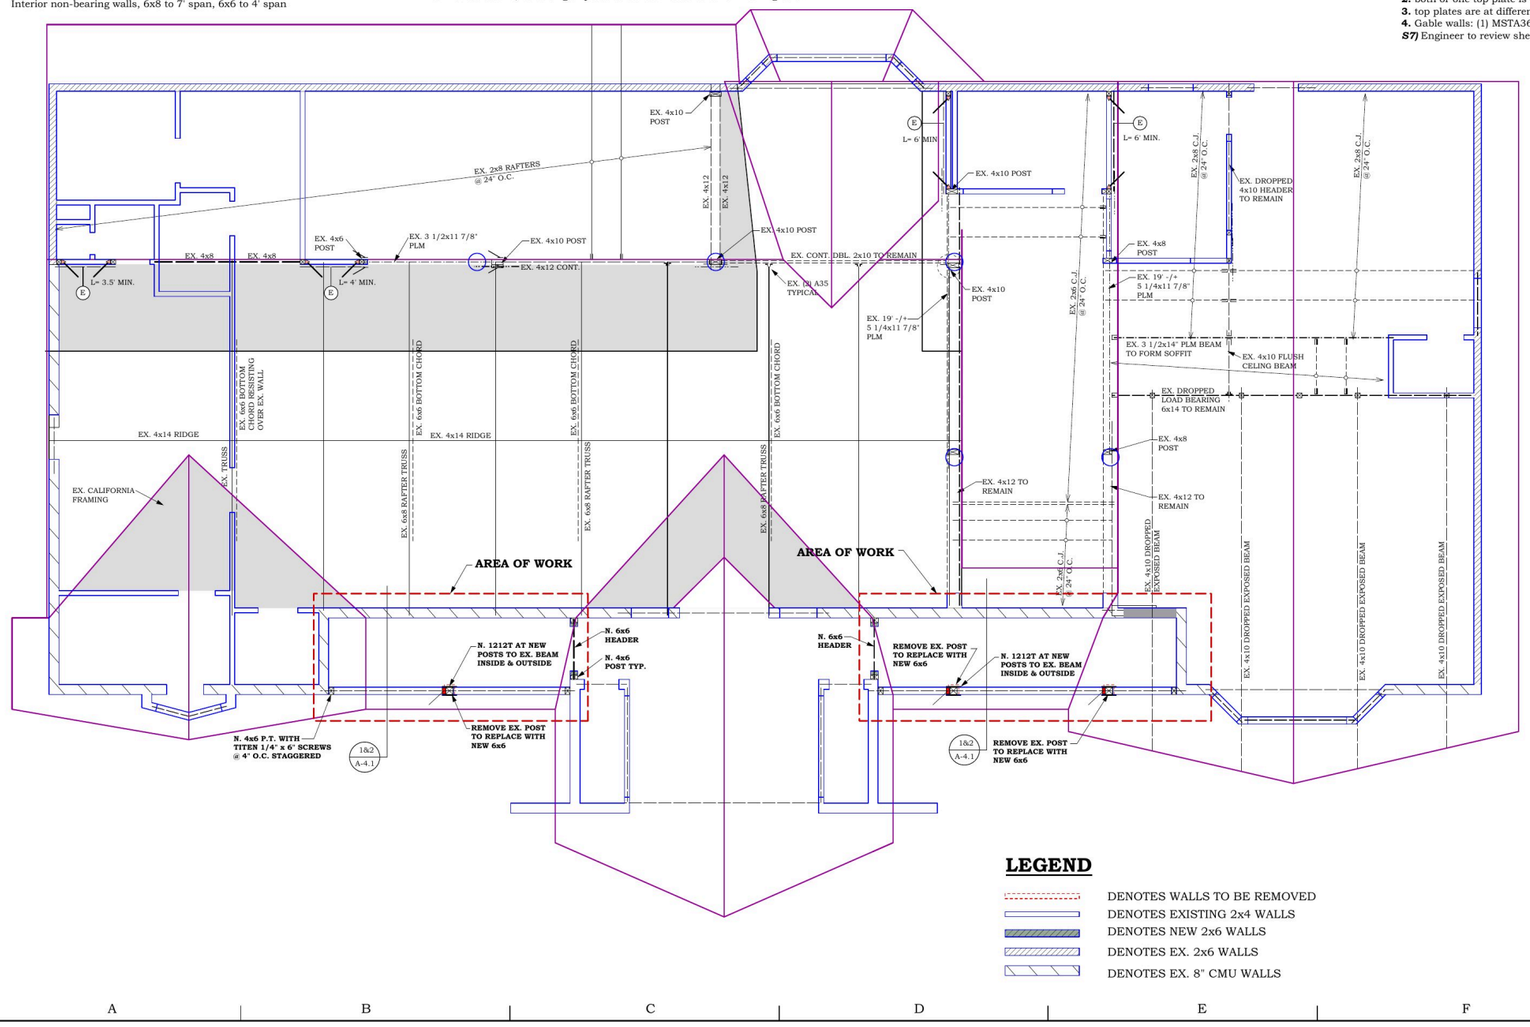

LEGEND

- DENOTES WALLS TO BE REMOVED
- DENOTES EXISTING 2x4 WALLS
- DENOTES NEW 2x6 WALLS
- DENOTES EX. 2x6 WALLS
- DENOTES EX. 8" CMU WALLS

STRUCTURAL OBSERVATIONS BY ENGINEER:
3 BUSINESS DAY EMAILED NOTICE IS REQUIRED TO SCHEDULE SITE VISITS - ENGINEER TO OBSERVE:

1- FOUNDATION:
A) REBARS FOR ANY POUR AT 10%
B) REBARS FOR ANY POUR AT 100%
2- FRAMING:
A) ANY FLOOR SURFACE PRIOR TO PLYWOOD
B) ANY WALL SURFACE PRIOR TO PLYWOOD
C) ANY ROOF SURFACE PRIOR TO PLYWOOD
3- SHEARWALLS, HOLDOWNS, & POSITIVE CONNECTORS.
4- FINAL VISIT AFTER PLUMBING & ELECTRICAL

CONTRACTOR MUST CONTACT ENGINEER:
3 BUSINESS DAY EMAILED NOTICE IS REQUIRED:

PRIOR TO ORDERING ANY MATERIAL
& AFTER THE STRUCTURE IS EXPOSED,
THE ENGINEER & ARCHITECT SHALL
REVIEW STRUCTURAL PLANS TO CONFIRM
OR MODIFY PROPOSED STRUCTURAL DESIGN.

SCALE: 1/4" = 1'-0"

Ali Atlb, P.E.
ATA ENGINEERING
1202 Main Street, Redwood City, CA 94063
Tel. 650.363.2338, Fax 650.363.2031, email: ata@ataeng.net

PRELIMINARY NOT VALID FOR CONSTRUCTION FOR BIDDING PURPOSES ONLY

ROOF FRAMING PLAN


REMODEL/ADDITION:
ADIB'S PERSIAN RUG CO
1426 S MAIN STREET
WALNUT CREEK,CA

DATE: 2024-08-05


S-2

OF SHEETS


S-2 Roof framing plan · Bidding set ·
Open full size

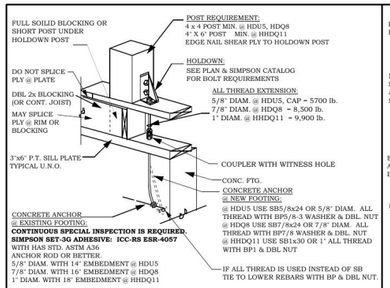


1 HOLDOWN - RAISED FLOOR - EXISTING OR NEW FOUNDATION

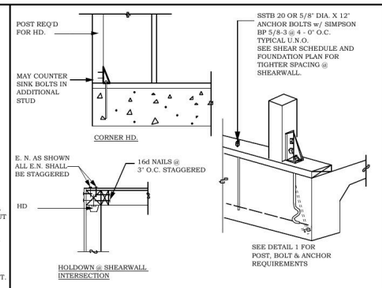


2 HOLDOWN - SLAB ON GRADE

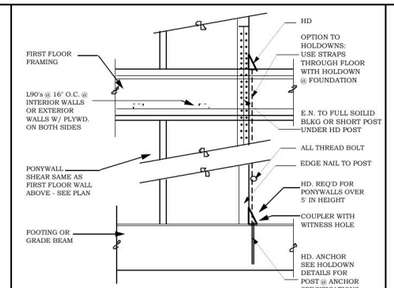


3 HOLDOWN - PONYWALL OR TWO STORY

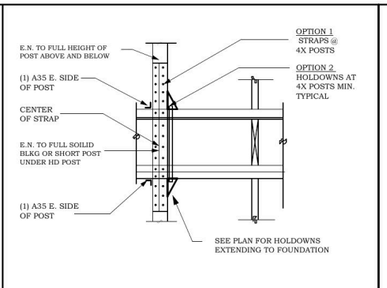


4 HOLDOWN OR STRAP THROUGH FLOOR

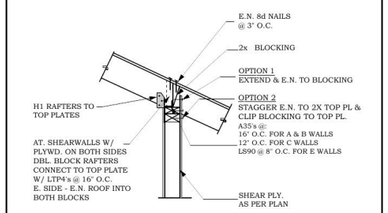


5 SHEAR TRANSFER - ROOF SHEARWALL PERPENDICULAR TO ROOF RAFTERS

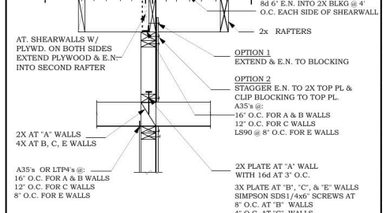


6 SHEAR TRANSFER - ROOF SHEARWALL PARALLEL TO ROOF RAFTERS

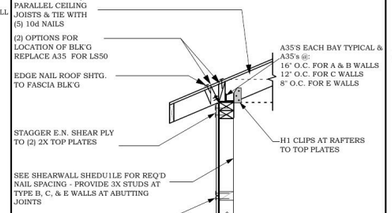


7 SHEAR TRANSFER - ROOF ROOF EAVE DETAIL

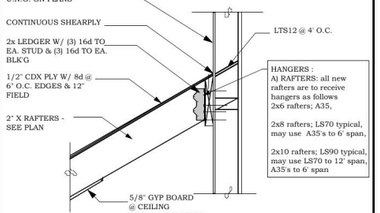

8 SHEAR TRANSFER - ROOF LOWER ROOF

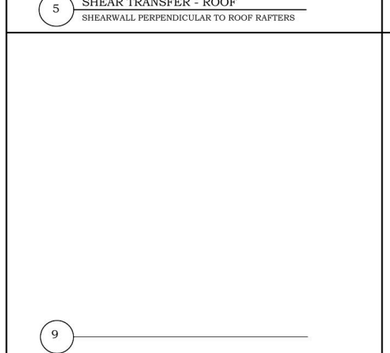


9

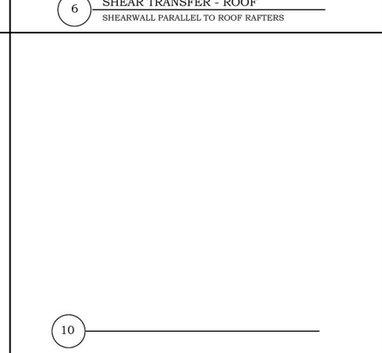


10


11 SHEAR TRANSFER AT FOUNDATION

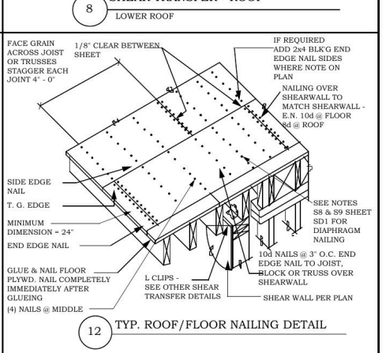


12 TYP. ROOF/FLOOR NAILING DETAIL

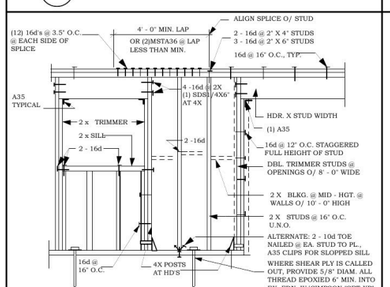


13 TYPICAL STUD WALL DETAIL (INCLUDING SHEARWALL)

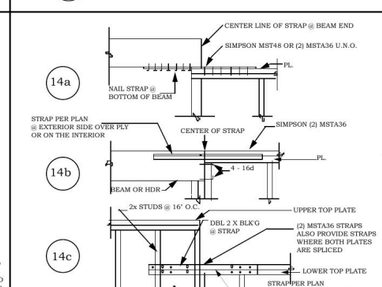


14 DRAG STRAP DETAIL BEAM, HEADER & TOP PLATES

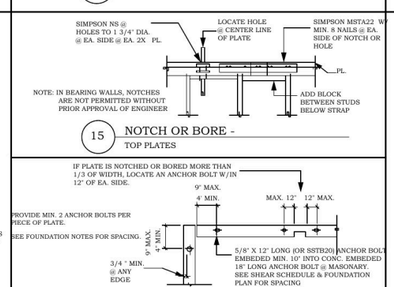

15 NOTCH OR BORE - TOP PLATES

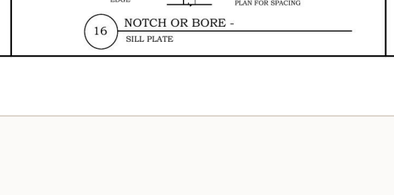

16 NOTCH OR BORE - SILL PLATE

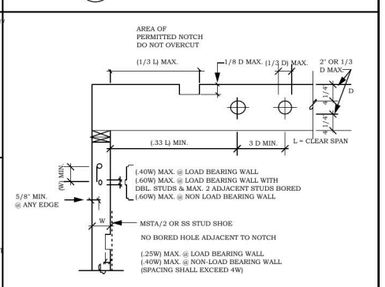

17 NOTCH & BORE LIMITS AT STUDS & JOISTS

STRUCTURAL NOTES:

CONTRACTOR IS RESPONSIBLE FOR ALL DIMENSIONS AND GRADES. CONTRACTOR SHALL VERIFY ALL CONDITIONS IN FIELD AND NOTIFY THIS OFFICE OF ANY DISCREPANCIES FOR CLARIFICATION AND/OR RESOLUTION, PRIOR TO COMMENCEMENT OF WORK. CONTRACTOR SHALL ALSO VERIFY EXISTING CONDITIONS AND REPORT TO THE ENGINEEER IF ANY OF THE FOLLOWING IS FOUND:
1) DIMENSIONS ARE INCORRECT, 2) THE EXISTING BUILDING IS OUT OF SQUARE LEVEL,
3) FOUNDATION IS CRACKED, 4) DRYROT OR TERMITE DAMAGE,
5) ANY EXISTING CONDITIONS NOT SHOWN ON THEW DRAWINGS.

CONTRACTOR SHALL MEET WITH THE ENGINEER AT LEAST 2 WEEKS PRIOR TO START OF CONSTRUCTION OR DEMOLITION. ENGINEER TO REVIEW FOUNDATION PRIOR TO CONCRETE POUR(S). ENGINEER SHALL ALSO REVIEW SHEAR WALLS AND HOLDOWNS. NOTIFY ENGINEER AT LEAST 72 HOURS IN ADVANCE.

ALL WORK SHALL CONFORM WITH 2022 CALIFORNIA BUILDING CODE & 2021 INTERNATIONAL BUILDING CODE AS WELL AS ALL APPLICABLE LOCAL CODES IN EFFECT AT THE TIME OF CONSTRUCTION.

CONCRETE:

S - 1. REGULAR WEIGHT HARD ROCK. MIN. 28 DAY COMPRESSIVE STRENGTH = 2500 psi AND MAX. SLUMP = 4 inch. USE TYPE II CEMENT PER ASTM C150. NO SPECIAL INSPECTION IS REQUIRED. WATER -CEMENT RATIO FOR INTERIOR SLABS SHALL BE MAXIMUM 0.45
S - 2. ALL CAST IN PLACE CONCRETE PIERS TO BE 2500 psi. - CONCRETE SPECIAL INSPECTION IS NOT REQUIRED
S - 3. CONCRETE COVER. MINIMUM COVER, inches (mm)

- **A.** Concrete cast against and permanently exposed to earth 3 (76)
- **B.** Concrete exposed to earth or weather:
  - No. 6 through No. 18 bar 2 (51)
  - No. 5 bar, W31 or D31 wire, and smaller 1 1/2 (38)
- **C.** Concrete not exposed to weather or in contact with ground:
  - Slabs, walls, joists:
    - No. 14 and No. 18 bar 1 1/2 (38)
    - No. 11 bar and smaller 3/4 (19)
  - Beams, columns:
    - Primary reinforcement, ties, stirrups, spirals 1 1/2 (38)
  - Shells, folded plate members:
    - No. 6 bar and larger 3/4 (19)
    - No. 5 bar, W31 or D31 wire, and smaller 1/2 (12.7)

STEEL:

S - 4. ASTM A-615 GRADE 40. SPLICES AND CORNER LAP 42 DIAMETER.
S - 5. ANCHOR BOLTS: ASTM A307 5/8" X 12" OR APPROVED EQUAL w/ SIMPSON BP 5/8-3 @ 48" O.C. UNLESS NOTED OTHERWISE.

FRAMING: MAY USE APPROVED EQUAL OSB INSTEAD OF PLYWOOD TYPICAL EXCEPT @ FLOORING
S - 6. ALL FRAMING TO CONFORM TO CHAPTER 23 2022 C.B.C.
S - 7. ALL NAILING TO CONFORM TO TABLE 2304.10.1 2022 C.B.C.
S - 8. **A)** SUB-FLOOR PLYWOOD: 3/4 INCH APA RATED T&G PLYWOOD 32/16 EXPOSURE 1 MINIMUM, GLUDED AND NAILED, TYPICAL U.N.O.
B) SUB-FLOOR NAILING: 10d NAILS @ 6" O.C. EDGE AND 10" O.C. FIELD.
S - 9. **A)** ROOF PLYWOOD: 5/8" PLYWOOD AT 24" O.C. RR, 1/2" PLYWOOD @ 16" O.C. RR SPACING. PLYWOOD SHALL BE APA RATED 24/0 EXPOSURE 1 MINIMUM, TYPICAL U.N.O.
B) ROOF NAILING: 8d COMMON NAILS @ 6" O.C. EDGE NAIL AND 12" O.C.FIELD.
S - 10. FRAMING LUMBER: DFL NO. 2 OR BETTER. THIS INCLUDES 2" THICK TO 12" WIDE.
S - 11. STRUCTURAL LUMBER: DFL NO. 1 OR BETTER. THIS INCLUDES 4" THICK OR THICKER, AND 6" WIDE OR WIDER. EXTERIOR BEAMS TO BE TREATED.
S - 12. ALL EXTERIOR FRAMING, OR IN DIRECT CONTACT WITH CONCRETE OR EXPOSED TO HIGH MOISTURE CONDITIONS SHALL BE PRESSURE PRESERVATIVE TREATED.
S - 13. ENGINEERED LUMBER: SUBMIT AITC CERTIFICATIONS TO BUILDING DEPARTMENT PRIOR TO ERECTION.
TJI PRO FLOOR JOISTS: ICC REPORT No. ESR-1153.
MICROLLAM: ICC REPORT No. ESR-1387,
BENDING STRESS: 2800 psi, SHEAR STRESS: 290 psi, E: 2,000 ksi.
PARALLAM: ICC REPORT No. ESR-1387,
BENDING STRESS: 2900 psi, SHEAR STRESS: 290 psi, E: 2,000 ksi.
GLULAM BEAMS: AIC 117 24PV4. NO CAMBER U.N.O.
S - 14. SILL PLATES: ALL 3X PRESSURE TREATED TIMBER.
S - 15. DOUBLE FLOOR JOISTS UNDER ALL PARALLEL PARTITIONS TYPICAL U.N.O.
S - 16. PROVIDE SOLID BLOCKING UNDER ALL PERPENDICULAR PARTITIONS.
S - 17. WALL STUDS: USE 2" X 4" STUDS TO 10 FEET HIGH, 2" X 6" STUDS TO 16 FEET HIGH AND 2" X 8" STUDS TO 22 FEET HIGH (16" O.C. U.N.O.). - DOUBLE KING STUDS @ WALL ENDS FOR WALLS OVER 10 FEET.
S - 18. CONNECTORS: SIMPSON OR APPROVED EQUAL. THIS INCLUDES ANCHORS FOR SHEAR WALLS AND STRAP TIES.
S - 19. MANUFACTURED TRUSSES BALCONY AND STAIR RAILINGS TO BE PRE-ENGINEERED: SUBMIT PLANS AND CALCULATIONS TO THE APPROPRIATE AUTHORITY PRIOR TO INSTALLATION.
S - 20. PRE-MANUFACTURED SHEAR WALLS: CONTRACTOR TO THOROUGHLY REVIEW INSTALLATION SPECIFICATIONS PRIOR TO FORMING OF FOUNDATION.
HARDY FRAME: ICC REPORT No. ES-ESR-2089
SIMPSON STRONG-WALL: ICC REPORT No. ES-ESR-1267
S - 21. ALL SITE AND FOUNDATION WORK SHALL BE DONE IN ACCORDANCE WITH 2022 C.B.C CHAPTER 18
S - 22. ALL NEW FRAMING LUMBER SHALL HAVE 19% MAX MOISTURE CONTENT @ INSTALLATION
S - 23. CONNECTORS FOR PRESSURE TREATED LUMBER (NAILS, HANGERS, ANCHOR BOLTS, PLATE WASHERS, ETC) SHALL BE HOT DIPPED GALVINIZED STAINLESS STEEL SILICON BRONZE OR COPPER PER 2022 CBC 2304.9.5.
S - 24. CHOROMATED COPPER ARSENATE (CCA) AS A PRESERVATIVE FOR WOOD (GREEN WOOD) INTENDED FOR RESIDENTIAL USE IS NOT ACCEPTABLE.
S-25 THAT SPECIAL INSPECTION PER 2022 CBC CHAPTER 17 IS REQUIRED FOR THE FOLLOWING:

- **A.** Shop and field structural welding.
- **B.** Construction of drilled piers or piles (driving of piles; drilling of piers, testing of piles). Note that these special inspections are normally provided by the geotechnical engineer and are in addition to concrete and rebar placement special inspections, for piers provide special inspection for concrete pier compression per CBC 1808-2-22.
- **C.** Observation of soil excavation and foundation construction operations by geotechnical engineer.
- **D.** Holdown rods epoxied into ex. foundation- see 1/SD1.
- **E.** Special inspection is required on all welding.
- **F.** Special inspection for epoxied holdowns.
- **G.** Special inspection for shearwalls 4" or less nailing.

SHEAR WALL NAILING SCHEDULE ** USE 1/2" PLYWOOD AT STUCCO WALLS. (See note S-9)

TYPE	NAILING	ANCHOR BOLT SPACING
A	3/8 INCH CDX W/ 8d @ 6" O.C. EDGES & SILL, 12" O.C. FIELD. CAP = 244 PLF	48" O.C.
B	3/8 INCH CDX W/ 8d @ 4" O.C. EDGES & SILL, (@ 3x STUDS , & PLATE, STAGGER NAILING) 12" O.C. FIELD. CAP = 350 PLF	32" O.C.
C	3/8 INCH CDX W/ 8d @ 3" O.C. EDGES & SILL, (@ 3x STUDS & PLATE, STAGGER NAILING) 12" O.C. FIELD CAP = 490 PLF.	16" O.C.
E	1/2 INCH STRUCTURAL 1 PLYWOOD W/ 10d @ 2" O.C. EDGES & SILL (@ 3x STUDS & PLATE, STAGGER NAILING) 12" O.C. FIELD. CAP = 870 PLF.	12" O.C.

** USE 1/2" PLYWOOD AT STUCCO WALLS.

SW-1. AT TYPES "B", "C", & "E" SHEARWALLS, FOUNDATION SILL PLATES AND ALL FRAMING MEMBERS RECEIVING EDGE NAILING FROM ABUTTING PANELS SHALL NOT BE LESS THAN 3" NOMINAL AND NAILS SHALL BE STAGGERED.
SW-2. WHERE PLYWOOD IS APPLIED ON BOTH FACES OF A WALL AND NAIL SPACING IS LESS THAN 6" O.C. ON EITHER SIDE, PANEL JOINTS SHALL BE ON 3" NOMINAL OR THICKER FRAMING AND NAILS ON EACH SIDE SHALL BE STAGGERED.
SW-3. FOR CONNECTION OF SOLE PLATES AT INTERIOR WALLS, SEE DETAILS 9, 10 & 11
SW-4. SEE NOTE S-5, THIS SHEET, FOR TYPICAL A.B. SPACING AND TABLE ABOVE FOR TIGHTER A.B. SPACING AT SHEARWALLS. TIGHTER SPACING SHOWN ON FOUNDATION PLAN GOVERSN OVER TABLE BELOW. PROVIDE MINIMUM (2)A.B. BETWEEN HOLDOWNS UNDER SHEARWALLS.
SW-5. MINIMUM SHEET DIMENSION FOR A PLYWOOD PANEL SHALL BE 24" UNLESS ALL EDGES OF UNDERSIZED SHEETS ARE SUPPORTED BY FRAMING MEMBERS OR BLOCKING PER SECTION 2315.5.3.
SW-6. USE COMMON NAIL FOR SHEAR NAILING. NAIL HEAD NOT TO PENETRATE PLYWOOD SURFACE, NO NAIL GUN IS ALLOWED AT SHEARWALLS.
SW-7. ALL NAILING SHALL BE STAGGERED.

THE ENGINEER EXPRESSLY RESERVES ITS COMMON LAW COPYRIGHT AND OTHER PROPERTY RIGHTS IN THESE PLANS. THESE PLANS ARE NOT TO BE REPRODUCED, ALTERED, OR COPIED IN ANY FORM OR MANNER WHATSOEVER, NOR ARE THEY TO BE ASSIGNED TO A THIRD PARTY WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION AND CONSENT OF THE ENGINEER. IN THE EVENT OF UNAUTHORIZED REUSE OF THESE PLANS BY A THIRD PARTY, THE ENGINEER SHALL BE HELD HARMLESS.

PRELIMINARY NOT VALID FOR CONSTRUCTION FOR BIDDING PURPOSES ONLY

ATA ENGINEERING
Ali Ada, P.E.
1202 Main Street, Redwood City, CA 94063
Tel. 650.363.2338, Fax 650.363.2031, email: ali@ataeng.net

STRUCTURAL DETAILS & NOTES

NO. CE49976 Exp. 6-30-25 CIVIL — STATE OF CALIFORNIA

PLANS ARE FAVORABLY REVIEWED FOR COMPLIANCE WITH STRUCTURAL CALCULATIONS ONLY.

REMODEL/ADDITION:
ADIB'S PERSIAN RUG CO
1426 S MAIN STREET
WALNUT CREEK,CA


DATE: 2024-08-05

SD-1

OF SHEETS

SD-1 Structural details & notes · Bidding set ·

Open full size

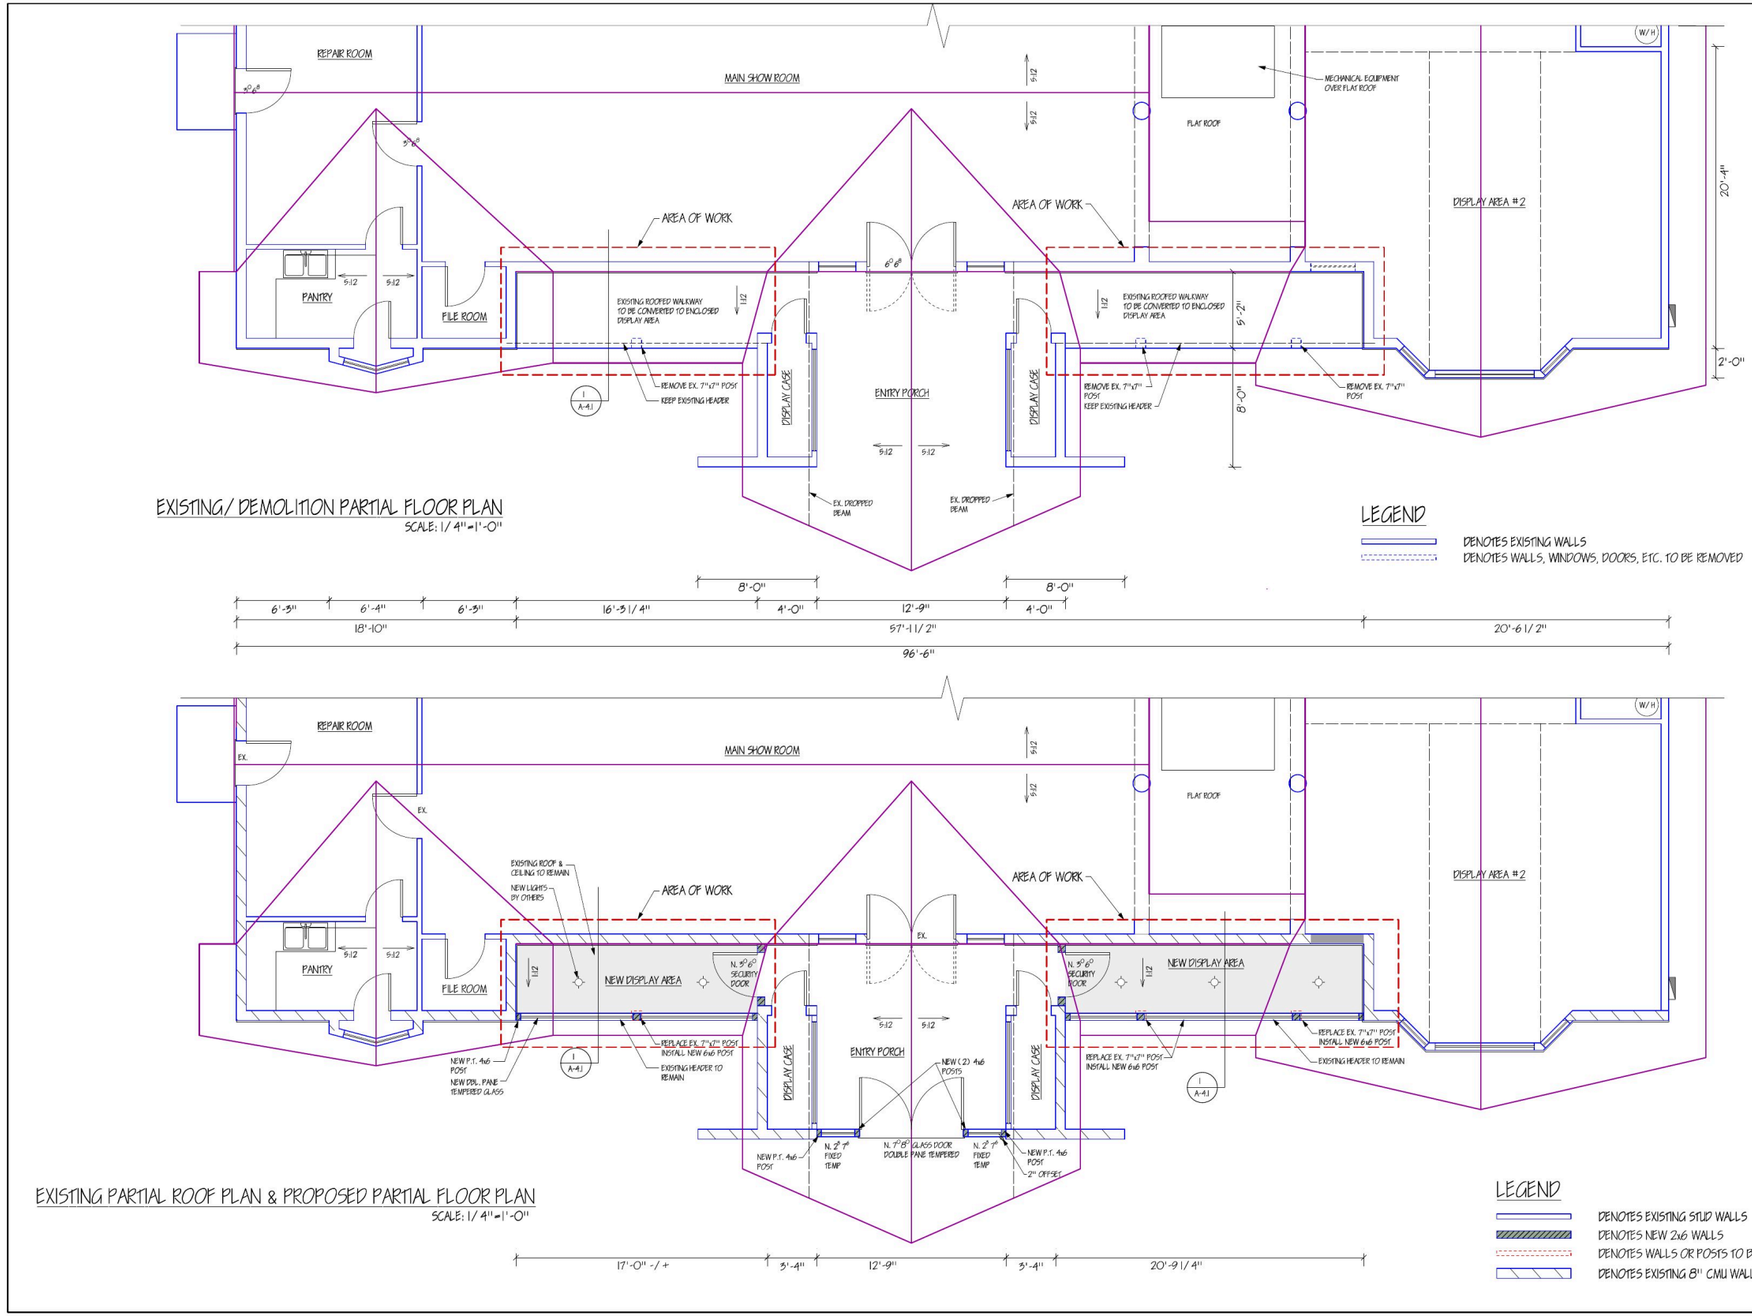

PRELIMINARY NOT VALID FOR CONSTRUCTION
FOR BIDDING PURPOSES ONLY

ATA ENGINEERING
Ali Adib, P.E.
1202 Main Street, Redwood City, CA 94063
Tel. 650.363.2338, Fax 650.363.2031, email: ata@ataeng.net

EXISTING/DEMOLITION FLOOR PLAN


REMODEL/ADDITION:
ADIB'S PERSIAN RUG CO
1426 S MAIN STREET
WALNUT CREEK,CA

DATE: 2024-08-05


A-1.1

OF SHEETS

A1.1 Existing / demolition + proposed partial floor plans · Sent 2024-08-06 ·
Open full size

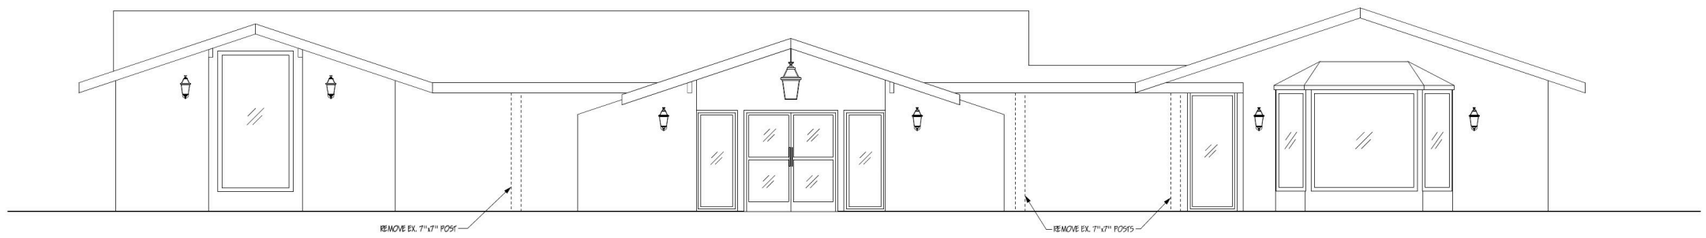

EXISTING FRONT ELEVATION
SCALE: 1/ 4"=1'-0"

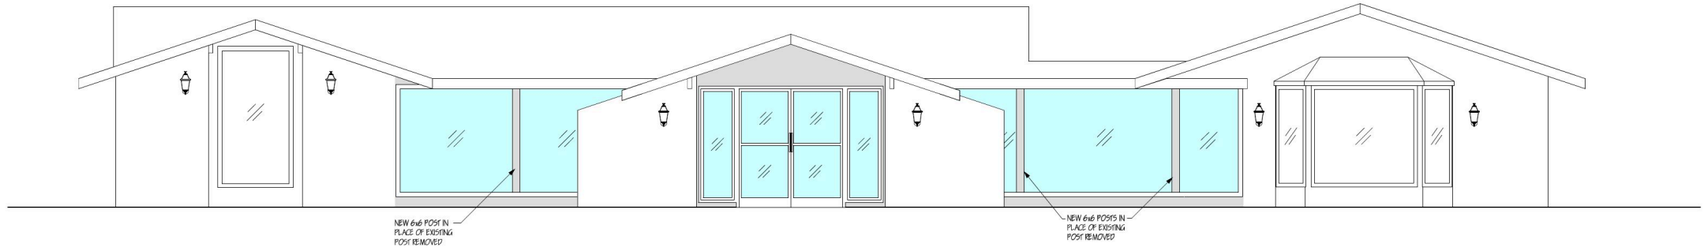

PROPOSED FRONT ELEVATION
SCALE: 1/ 4"=1'-0"

PRELIMINARY NOT VALID FOR CONSTRUCTION
FOR BIDDING PURPOSES ONLY

ATA
ENGINEERING
Ali Adib, P.E.
1202 Main Street, Redwood City, CA 94063
Tel. 650.363.2338, Fax 650.363.2031, email: ata@ataeng.net

ELEVATIONS

LICENSED PROFESSIONAL ENGINEER
ALI ADIB
NO. CE49976
Exp. 8-30-25
CIVIL
STATE OF CALIFORNIA


REMODEL/ADDITION:
ADIB'S PERSIAN RUG CO
1426 S MAIN STREET
WALNUT CREEK,CA

DATE: 2024-08-05

A-2.1

OF SHEETS

A2.1 Existing + proposed front elevations · Sent 2024-08-06 ·
Open full size

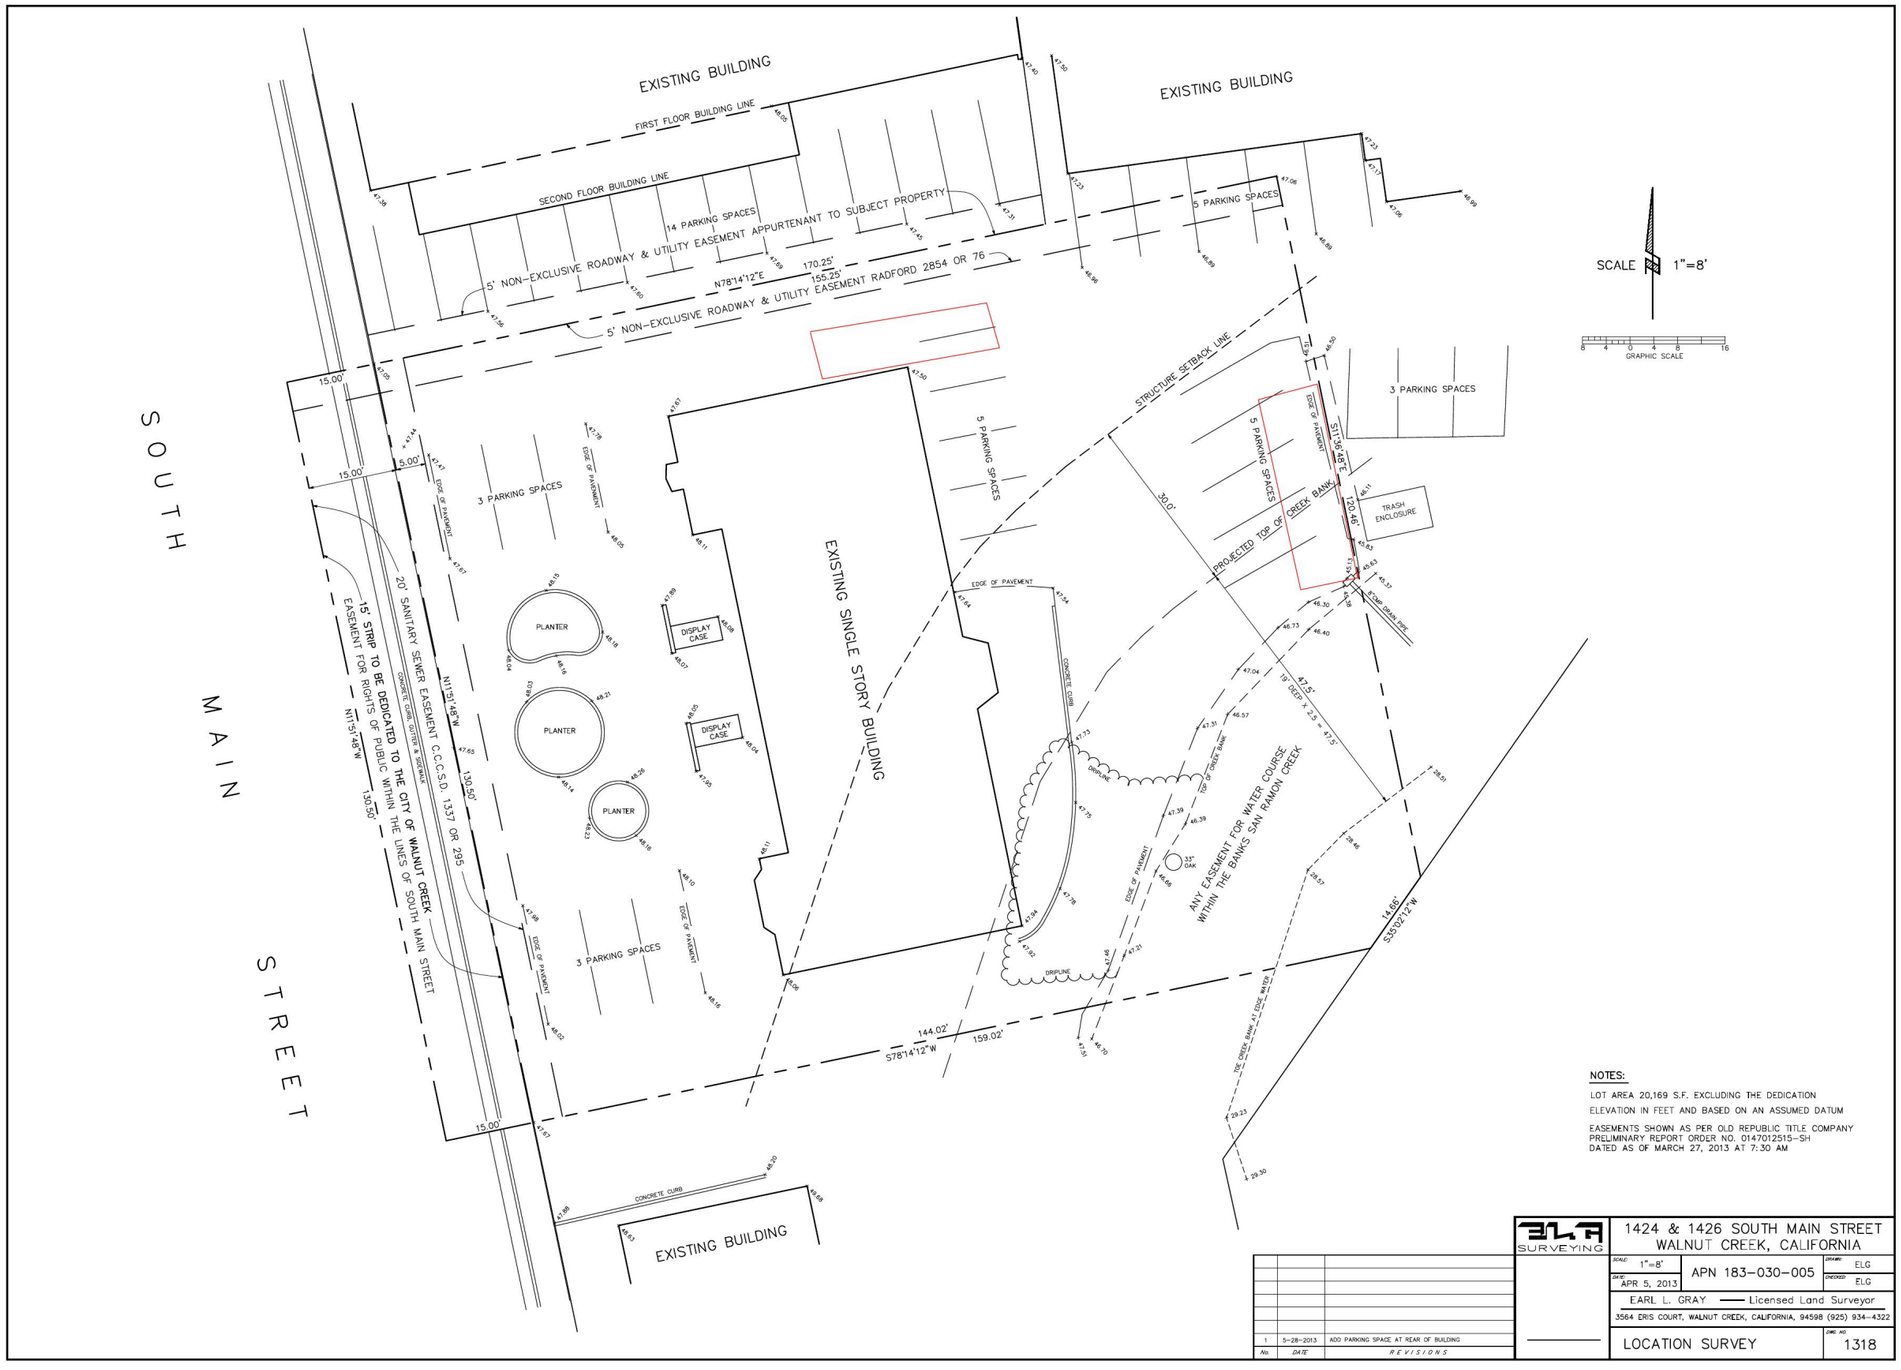

1318 Location survey · Earl L. Gray, 2013 ·

Open full size

People

NAME	ROLE	CONTACT
Ali Adib, P.E.	Civil engineer, local lead · ATA Engineering, Redwood City	ata@ataeng.net · (650) 363-2338
Medi Adibnatanzi	Coordinator	thenatanzi@gmail.com
Ray Adib	Owner / applicant on 2024 drawings	ray@adibs.com · (925) 937-3338
David Barnes	SolCore, Inc. (CSLB 1123152)	davidbarnes@solcorepower.com · 833-765-2673
City of Walnut Creek, Building	Permits, inspections	buildingtech@walnut-creek.org · (925) 943-5834
City Planning (2019–20)	C. Griffin, A. Carreon	Griffin@ / Carreon@walnut-creek.org

Documents

DOCUMENT	DATE	PAGES
ATA permit set	2024-08-10	6
ATA bidding set	2024-08-05	8
A1.1 floor plans · A2.1 elevations	2024-08-05	1 + 1
ATA submittal summary letter	2024-08-08	1
Location survey 1318	2013	1
GAF shingle colors (SolCore)	2026-07-20	1
City PRT 19-011 report	2019-08-14	6
City letter Y19-124 #1	2019-11-22	20
City letter Y19-124 #2	2020-04-17	9
Planning Commission staff report	2020-05-28	6
Revocable license (access)	2019-12 / 2020-01	17
LCA pre-application + exhibits	2019-10-17	14
LCA response to city (draft)	2019-12-10	16
LCA PRT set · pre-app set · updated set · parking notes · sketch	2019	—
LCA unit plans · plans 210909.1 · planning app · SB 330 app	2021	—

Not available here: S26106 approved plans and inspection card (city portal); LCA "5.1 Updated set", "WCMC 10-2 parking code", initial design options, TJKM parking study (in emails too large to retrieve; open in Gmail).