
A-0.1.- COVER SHEET
A-1.1.- EXISTING/ DEMOLITION FLOOR PLAN
A-2.1- PROPOSED FLOOR PLAN
A-3.1.- ELEVATIONS
S-1.- PARTIAL STRUCTURAL ROOF & FOUNDATION PLAN
SD-1. - STRUCTURAL SECTIONS, DETAILS & NOTES

SHEET INDEX | 1

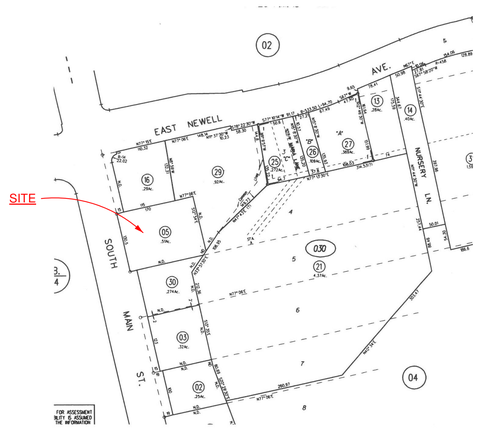


VICINITY MAP | 5

APN :	183-030-005
LOT SIZE :	20,240.0 S.F.
OCUPANCY GROUP :	M
CONSTRUCTION TYPE :	IBC TYPE 3B JOISTED MASONRY
NUMBER OF STORIES :	1 STORIES
ZONING CLASIFICATION:	CR
FIRE SPRINKLERS :	NO

PROJECT DATA | 2

2022 CALIFORNIA RESIDENTIAL CODE
2022 CALIFORNIA BUILDING CODE
2022 CALIFORNIA PLUMBING CODE
2022 CALIFORNIA MECHANICAL CODE
2022 CALIFORNIA ELECTRIC CODE
2022 CALIFORNIA ENERGY CODE
2022 CALIFORNIA FIRE CODE
2022 CAL GREEN
ALONG WITH ALL OTHER LOCAL, STATE & FEDERAL
LAWS & REGULATIONS.
ASCE 7-19 (MINIMUM DESIGN LOADS)
AISC 341-22 (2022 SEISMIC DESIGN FOR STEEL BUILDINGS)
AISC 358-22 (PREQUALIFIED CONNECTIONS FOR SPECIAL & INTERMEDIATE MOMENT FRAMES)
AISC 360-22 (2022 STEEL SPECS 15TH EDITION)
ACI 318-22 (CONCRETE DESIGN)
AISC 360-22 (MASONRY DESIGN)
AF&PA/ NDS-21 (WOOD DESIGN)

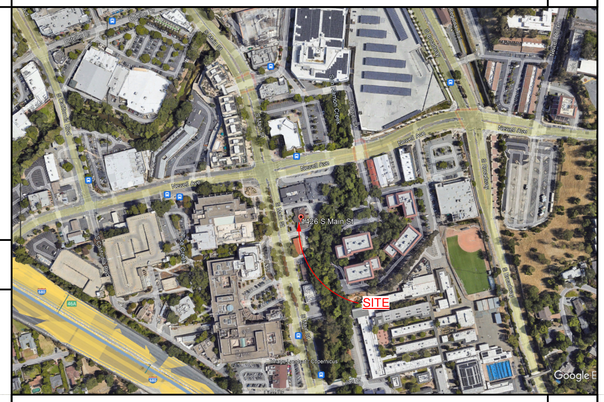

AERIAL VIEW | 6

LOT AREA : 20,240 SF

DESIGN DATA | 3


BUILDING DATA | 7

OWNERS & APPLICANTS:
RAY ADIB
ADIB'S PERSIAN RUG CO
1426 S MAIN STREET
WALNUT CREEK, CA
TEL: (925) 937-3338
ray@adibs.com

ARCHITECTURAL PLANS,
STRUCTURAL ENGINEERERING:
ATA ENGINEERING
1202 MAIN STREET
REDWOOD CITY, CA 94063
TEL: (650) 363-2338
FAX: (650) 363-2031
ata@ataeng.net

PROJECT DIRECTORY | 4

| 8

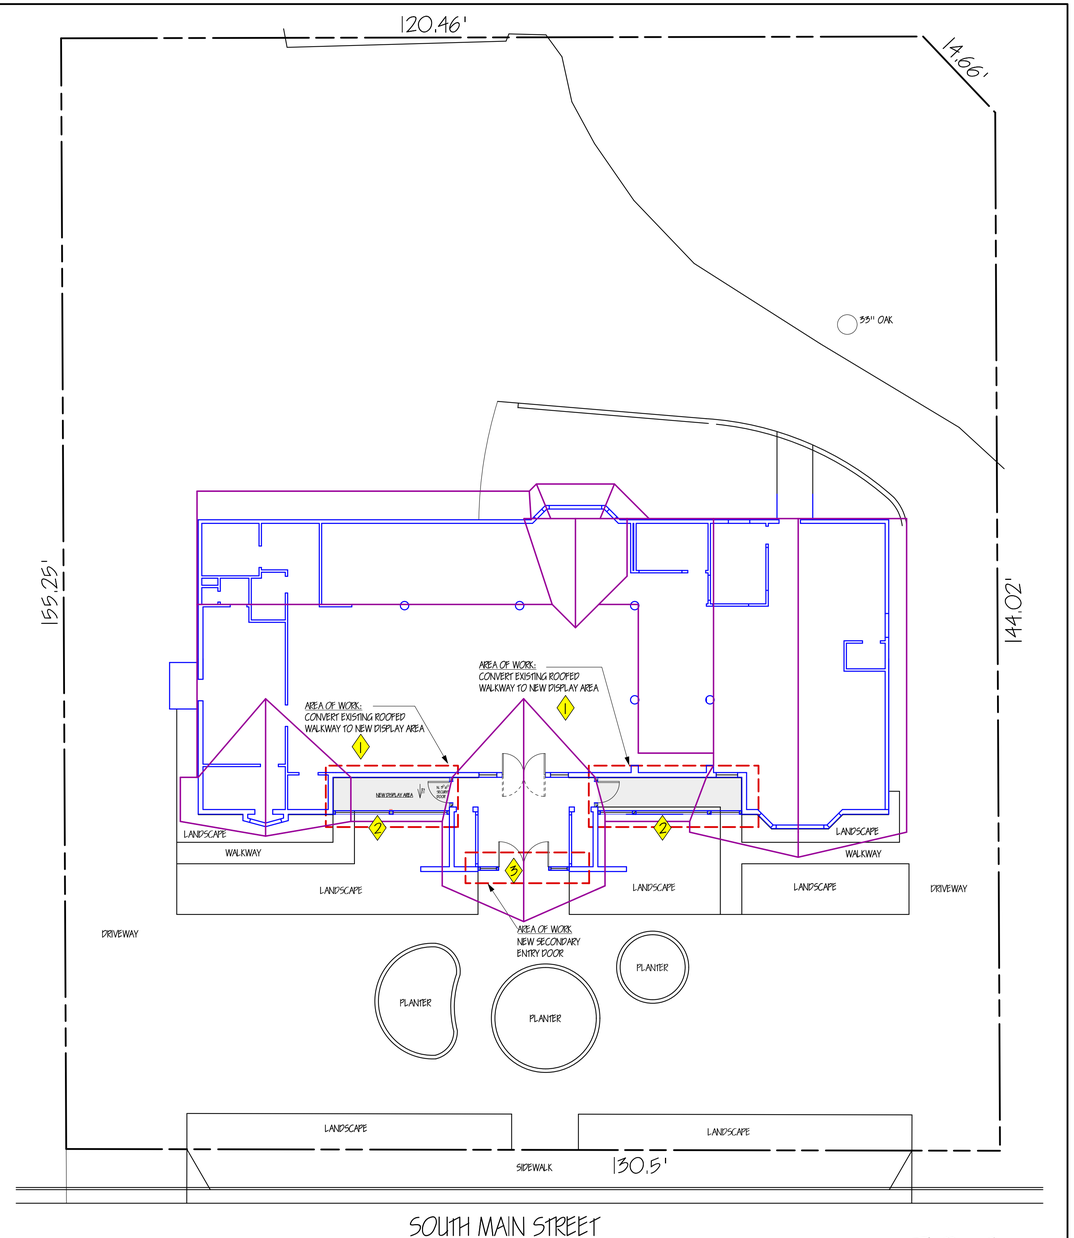

SCOPE OF WORK:

1 - CONVERT EXISTING ROOFED WALKWAY INTO A DISPLAY AREA

2 - ADD 2x6 WALL & WINDOWS UNDER EXISTING HEADERS

3 - ADD A SECONDARY ENTRY DOOR FOR SECURITY PURPOSES, TO CREATE A BUFFER ZONE TO EXISTING MAIN DOORS

SITE TO REMAIN AS-IS
NO NEW WORK IS PROPOSED

SCOPE OF WORK | SCALE: 1"=10'-0" | 9

ATA ENGINEERING
Ali Adib, P.E.
1202 Main Street, Redwood City, CA 94063
Tel. 650.363.2338, Fax 650.363.2031, email: ata@ataeng.net


REGISTERED PROFESSIONAL ENGINEER
ALI ADIB
NO. CE49976
Exp. 6-30-25
CIVIL
STATE OF CALIFORNIA

REMODEL/ADDITION:
ADIB'S PERSIAN RUG CO
1426 S MAIN STREET
WALNUT CREEK,CA

DATE: 2024-08-10

A-0.1

OF SHEETS

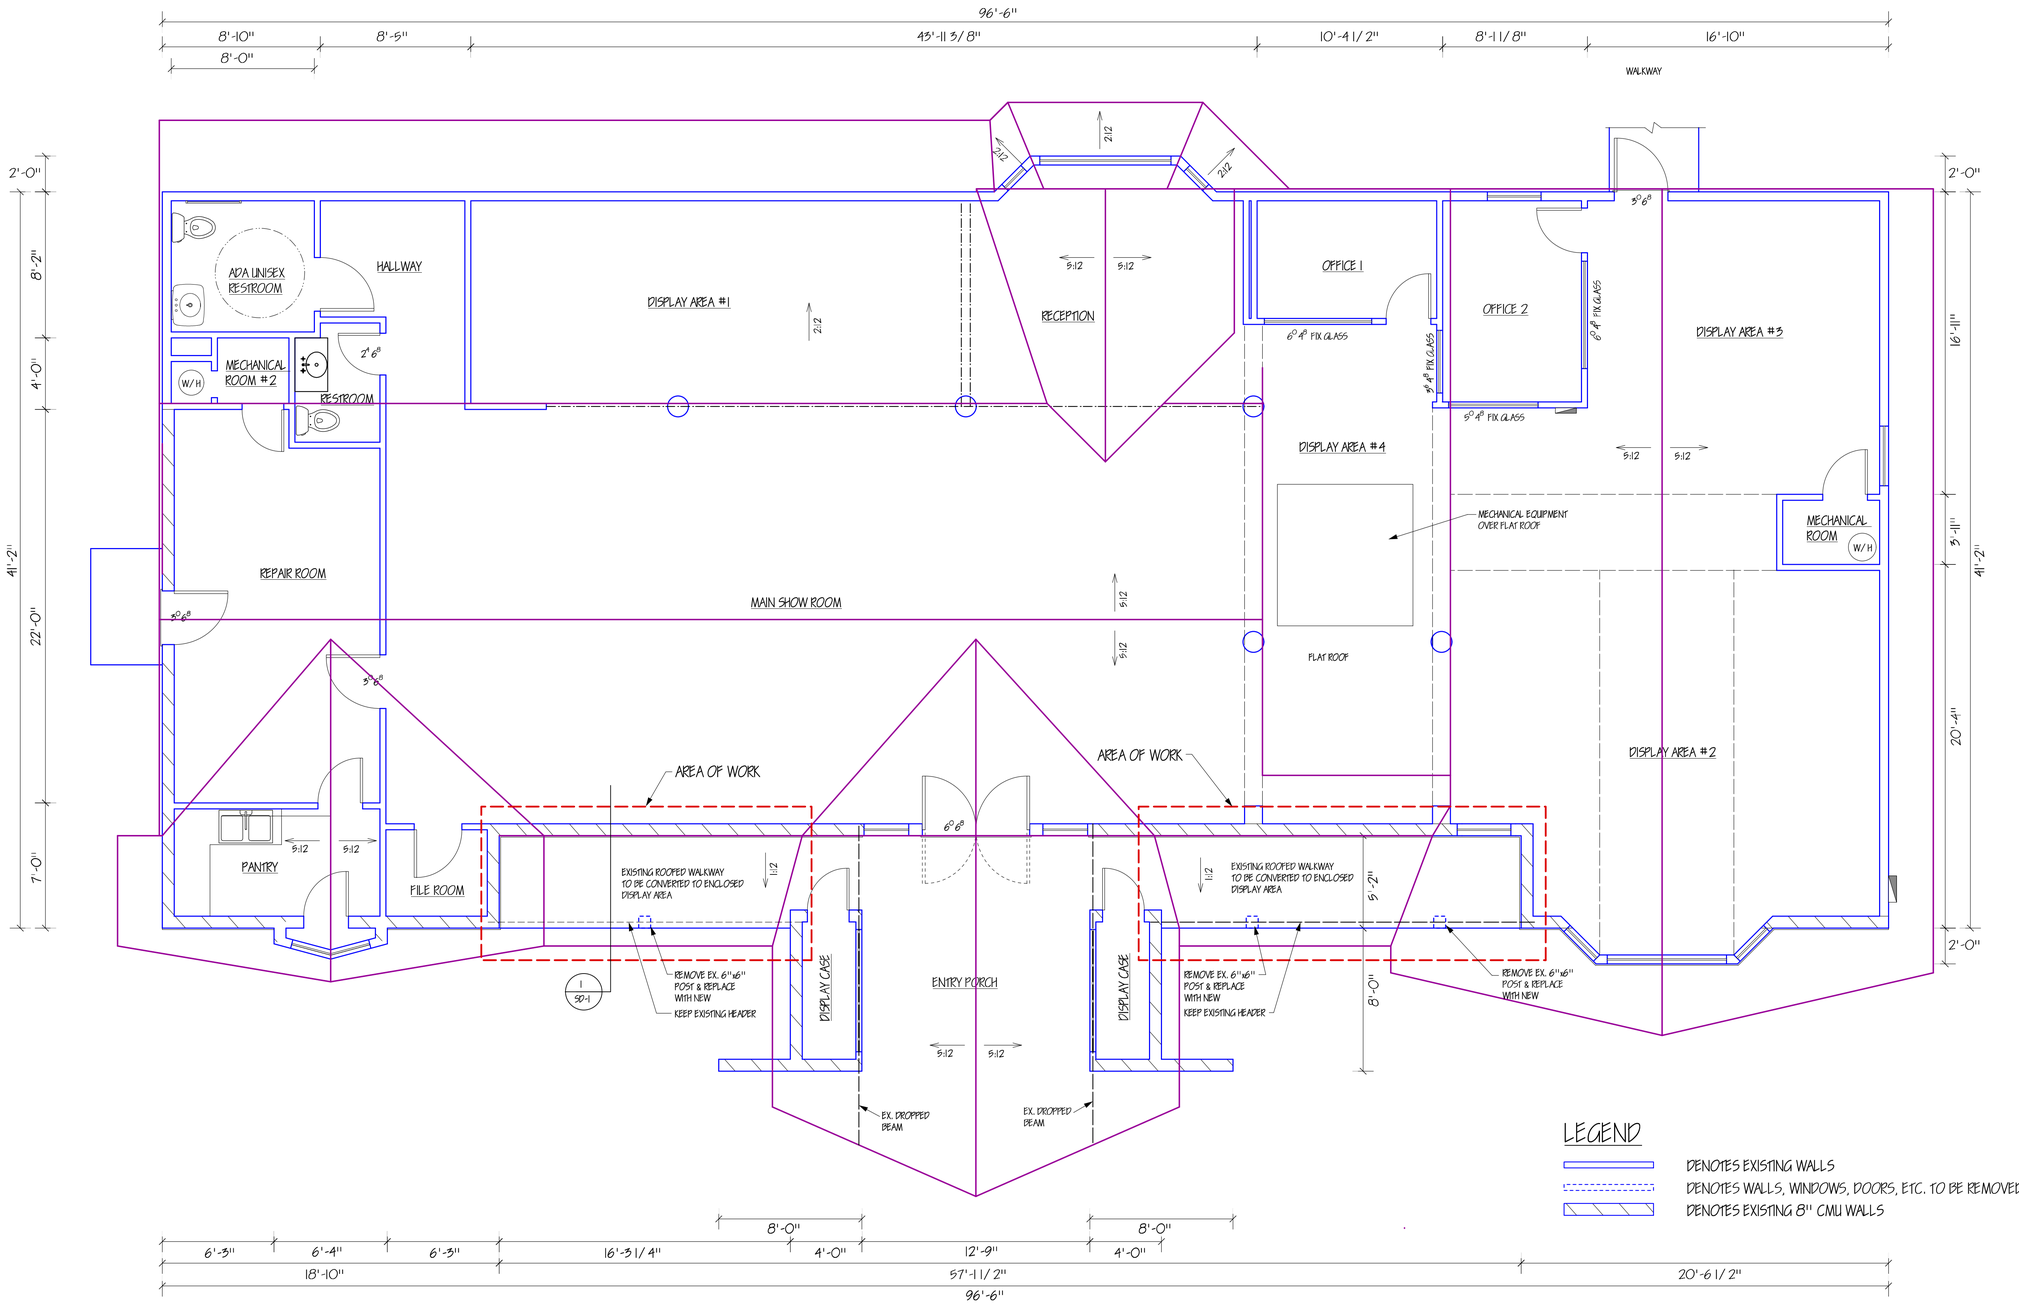

LEGEND

- DENOTES EXISTING WALLS
- DENOTES WALLS, WINDOWS, DOORS, ETC. TO BE REMOVED
- DENOTES EXISTING 8" CMU WALLS

EXISTING/ DEMOLITION FLOOR PLAN

SCALE: 1/ 4"=1'-0"

ATA ENGINEERING
Ali Adib, P.E.
1202 Main Street, Redwood City, CA 94063
Tel. 650.363.2338, Fax 650.363.2031, email: ata@ataeng.net

EXISTING/DEMOLITION FLOOR PLAN


REGISTERED PROFESSIONAL ENGINEER
ALI ADIB
NO. CE49976
Exp. 6-30-25
CIVIL
STATE OF CALIFORNIA

REMODEL/ADDITION:
ADIB'S PERSIAN RUG CO
1426 S MAIN STREET
WALNUT CREEK,CA

DATE: 2024-08-10

A-1.1

OF SHEETS

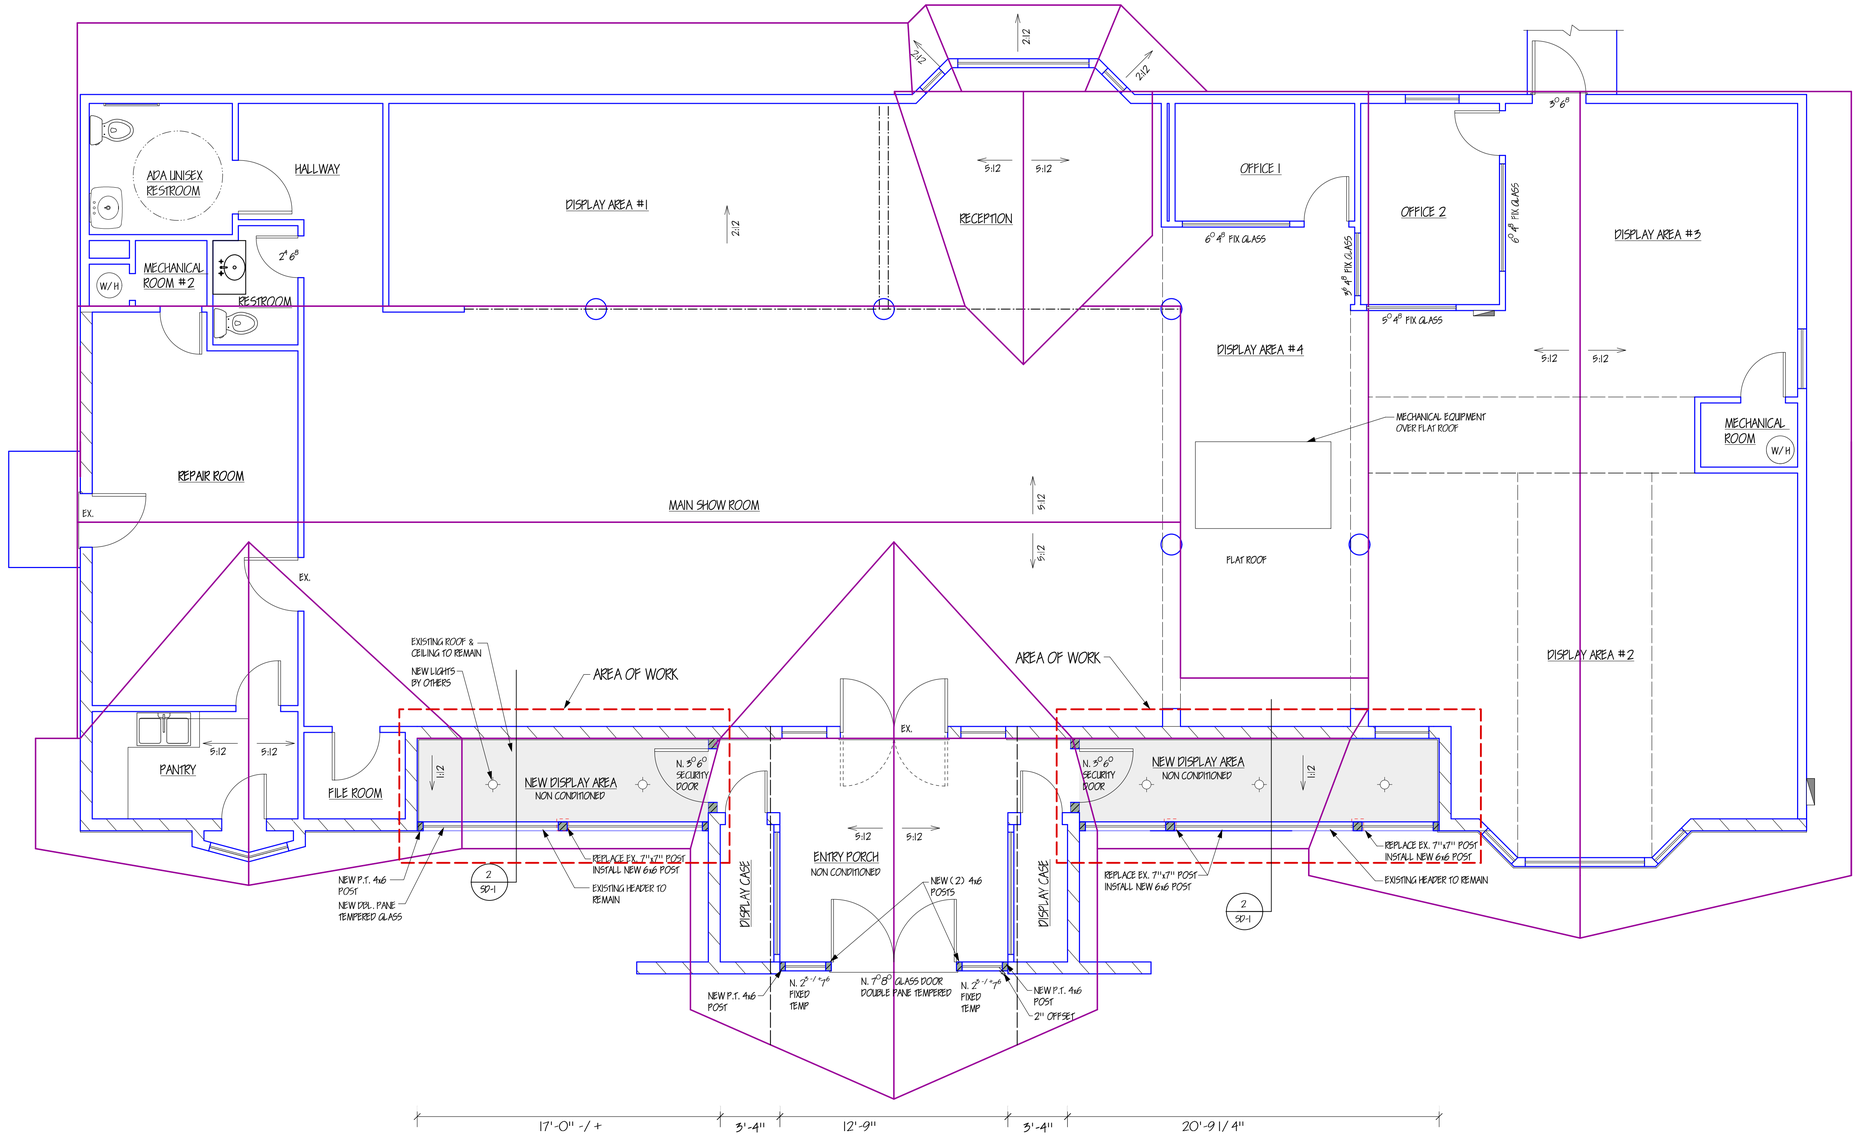

EXISTING PARTIAL ROOF PLAN & PROPOSED PARTIAL FLOOR PLAN

SCALE: 1/4"=1'-0"

LEGEND

- DENOTES EXISTING STUD WALLS
- DENOTES NEW 2x6 WALLS
- DENOTES WALLS OR POSTS TO BE REMOVED
- DENOTES EXISTING 8" CMU WALLS

ATA ENGINEERING
Ali Adib, P.E.
1202 Main Street, Redwood City, CA 94063
Tel. 650.363.2338, Fax 650.363.2031, email: ata@ataeng.net

PROPOSED FLOOR PLAN


REGISTERED PROFESSIONAL ENGINEER ALI ADIB NO. CE 49976 EXP. 6-30-25 CIVIL STATE OF CALIFORNIA

REMODEL/ADDITION:
ADIB'S PERSIAN RUG CO
1426 S MAIN STREET
WALNUT CREEK,CA

DATE: 2024-08-10


A-2.1

OF SHEETS

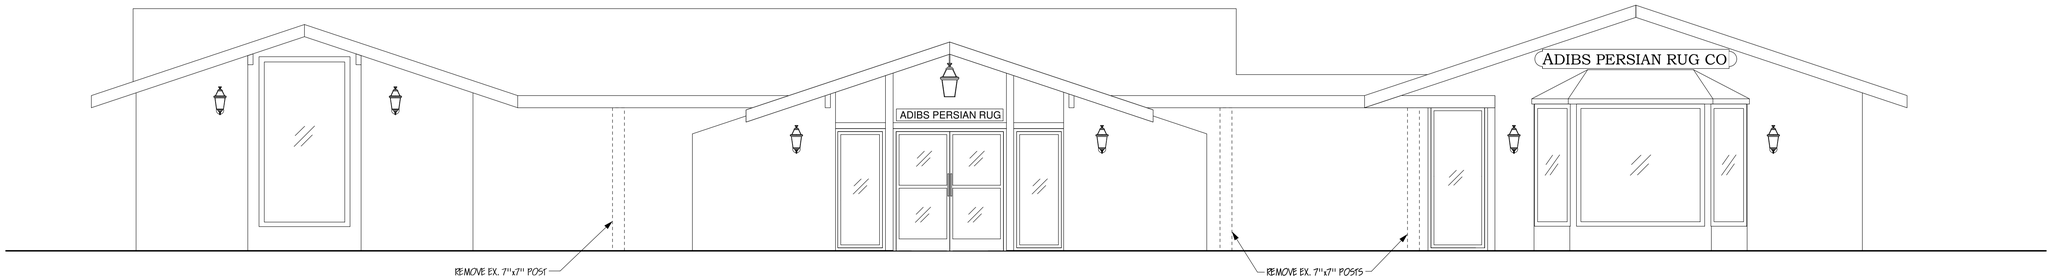

EXISTING FRONT ELEVATION

SCALE: 1/ 4"=1'-0"

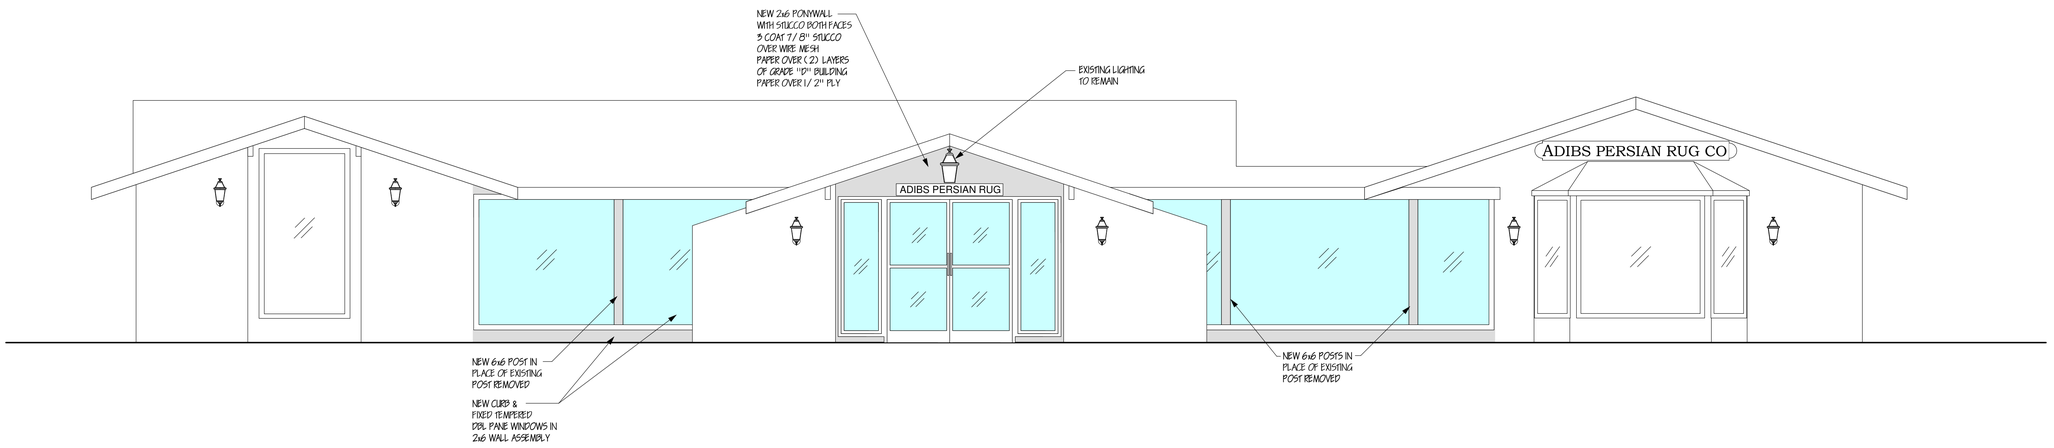

PROPOSED FRONT ELEVATION

SCALE: 1/ 4"=1'-0"

Ali Adib, P.E.
ATA
ENGINEERING
1202 Main Street, Redwood City, CA 94063
Tel. 650.363.2338, Fax 650.363.2031, email: ata@ataeng.net

ELEVATIONS


REGISTERED PROFESSIONAL ENGINEER
ALI ADIB
NO. CE49976
Exp. 6-30-25
CIVIL
STATE OF CALIFORNIA

REMODEL/ADDITION:
ADIB'S PERSIAN RUG CO
1426 S MAIN STREET
WALNUT CREEK,CA

DATE: 2024-08-10


A-3.1

OF SHEETS

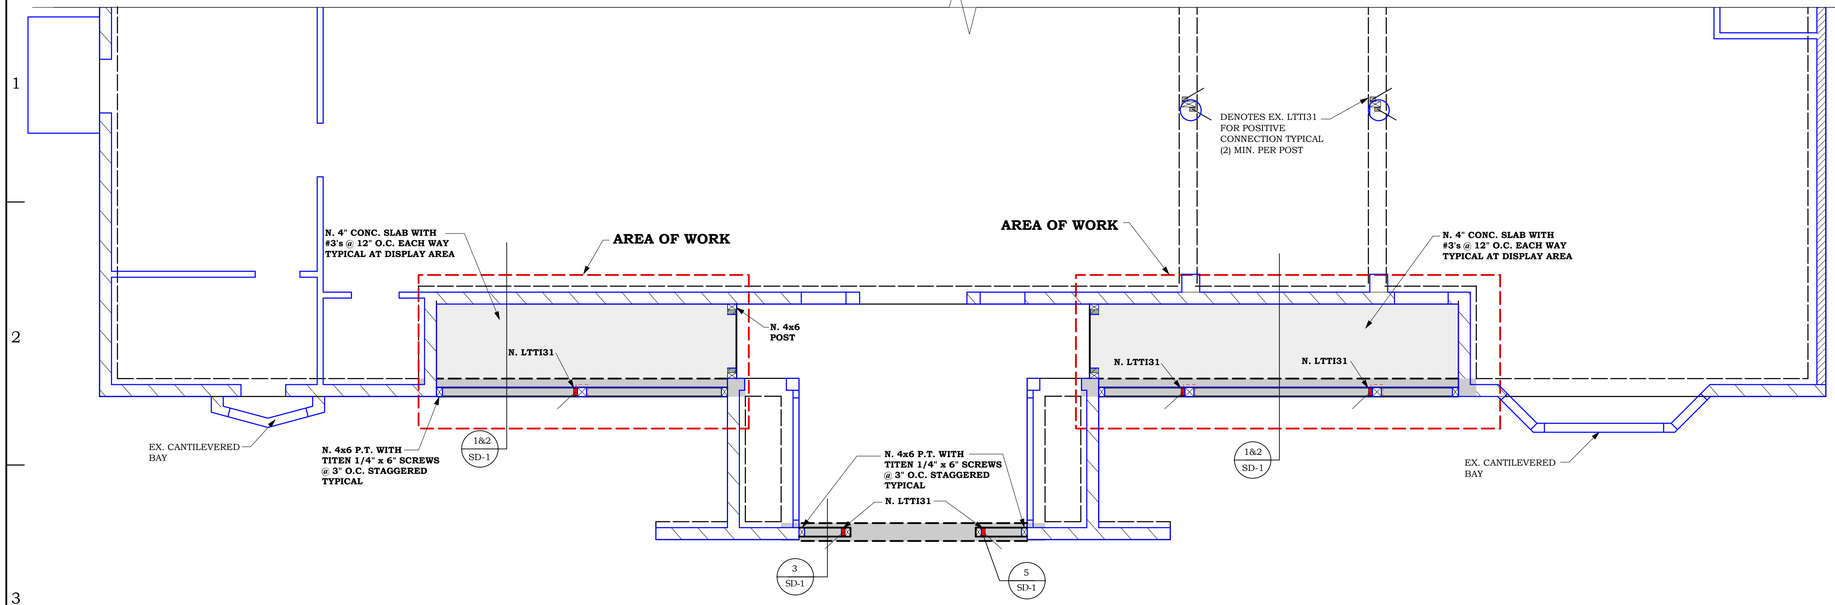

PARTIAL FOUNDATION PLAN

SCALE: 1/4"=1'-0"

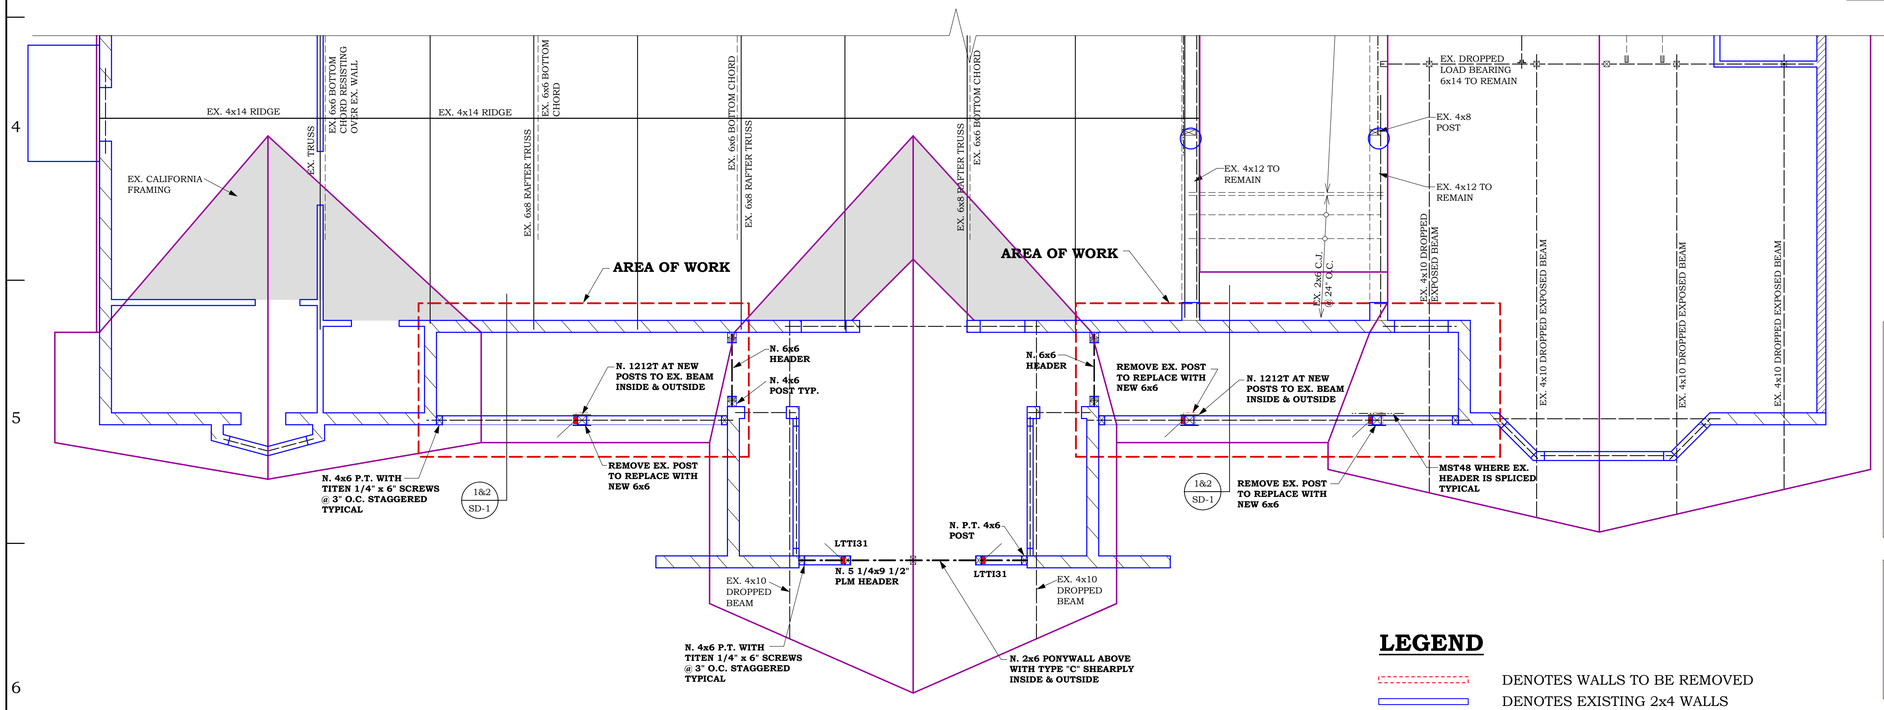

PARTIAL ROOF FRAMING PLAN

SCALE: 1/4"=1'-0"

FOUNDATION NOTES:

Contractor shall verify all conditions shown on all drawings and immediately notify the engineer of any discrepancies.
Contractor shall meet with engineer at least 2 weeks prior to start of construction or demolition to review the project.

F1A) Denotes: Existing HDU5 at 4x posts typical u.n.o. Align holdowns with walls above. Do not scale location from this plan.

F1B) Denotes: New LTTI31 at new 6x6 posts.

F2A) *HOLDOWNS AT NEW FOUNDATION: See detail 5/SD1.*

F3A) ANCHOR BOLTS AT NEW FOUNDATION:
1. 5/8 " diameter ASTM A307 x 12" anchor bolts with BP5/8-3 & nut
2. A.B. shall be spaced at 48" o.c. maximum typ. u.n.o.
3. See note F4 for tighter spacing
4. 3x sill plates typical at all new foundation u.n.o.
5. Provide minimum (2) A.B. between holdowns

F4) Connectors for pressure treated lumber (nails, hangers, anchor bolts, plate washers, etc.) shall be hot dipped galvanized or stainless steel per C.B.C. 2304.9.5.
F5) All site and foundation work shall be done in accordance with 2022 C.B.C. chapter 18.
F6) All work shall conform with 2022 C.B.C. as well as applicable local codes in effect at the time of construction, including 2021 I.B.C.
F7) All framing shall conform with 2022 C.B.C., chapter 23.
F8) All nailing shall conform with 2022 C.B.C. table 2304.10.1
F9) During the placing of concrete, mushroomed concrete spillage at the sides of foundation should be trimmed to the design size of the fdn. respectively. Also, bottom of footings shall be clean of spoils.

GRAVITY DESIGN INFO

ROOF DL:	14 PSF.
ROOF LL:	20 PSF.
FLOOR DL:	N/A
FLOOR LL:	N/A
DECK DL:	N/A
DECK LL :	N/A

SOILS LOAD BEARING VALUES:

SOIL BEARING PRESSURE:	1,500 PSF

STRUCTURAL OBSERVATIONS BY ENGINEER:
3 BUSINESS DAY EMAILED NOTICE IS REQUIRED TO SCHEDULE SITE VISITS - ENGINEER TO OBSERVE:

1- FOUNDATION:
A) REBARS FOR ANY POUR AT 10%
B) REBARS FOR ANY POUR AT 100%
2- FRAMING:
A) ANY FLOOR SURFACE PRIOR TO PLYWOOD
B) ANY WALL SURFACE PRIOR TO PLYWOOD
C) ANY ROOF SURFACE PRIOR TO PLYWOOD
3- SHEARWALLS, HOLDOWNS, & POSITIVE CONNECTORS.
4- FINAL VISIT AFTER PLUMBING & ELECTRICAL

CONTRACTOR MUST CONTACT ENGINEER:
3 BUSINESS DAY EMAILED NOTICE IS REQUIRED:

PRIOR TO ORDERING ANY MATERIAL & AFTER THE STRUCTURE IS EXPOSED, THE ENGINEER & ARCHITECT SHALL REVIEW STRUCTURAL PLANS TO CONFIRM OR MODIFY PROPOSED STRUCTURAL DESIGN.

LEGEND

- DENOTES WALLS TO BE REMOVED
- DENOTES EXISTING 2x4 WALLS
- DENOTES NEW 2x6 WALLS
- DENOTES EX. 2x6 WALLS
- DENOTES EX. 8" CMU WALLS

SCALE: 1/4" = 1'-0"

Ali Adib, P.E.
ATA ENGINEERING
1202 Main Street, Redwood City, CA 94063
Tel. 650.363.2338, Fax 650.363.2031, email: ata@ataeng.net

PARTIAL STRUCTURAL PLANS


REGISTERED PROFESSIONAL ENGINEER ALI ADIB NO. CE49976 Exp. 6-30-25 CIVIL STATE OF CALIFORNIA

REMODEL/ADDITION:
ADIB'S PERSIAN RUG CO
1426 S MAIN STREET
WALNUT CREEK,CA

DATE: 2024-08-10


S-1

OF SHEETS

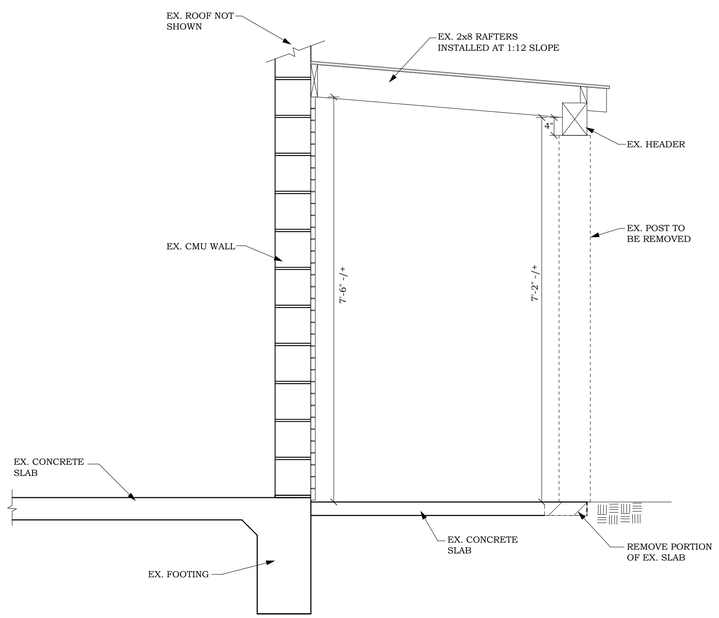


1 EXISTING PARTIAL SECTION

SCALE: 3/4"=1'-0"

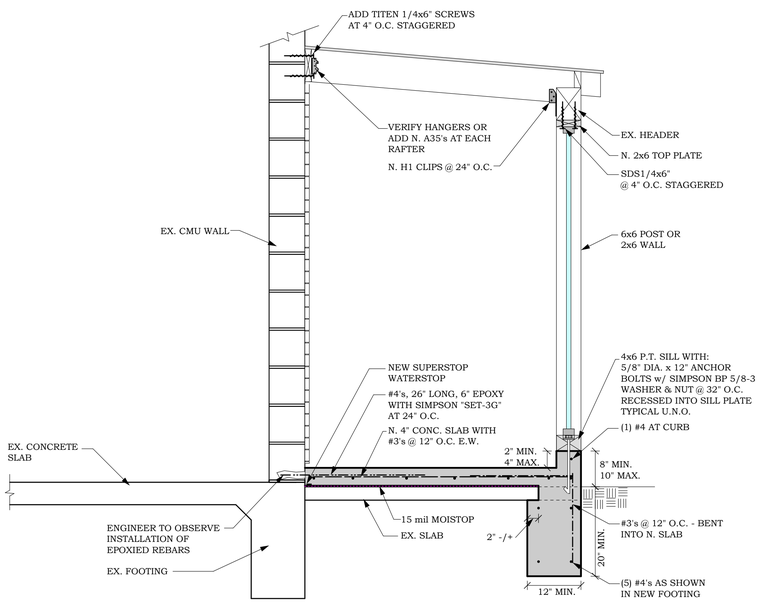


2 PROPOSED PARTIAL SECTION

SCALE: 3/4"=1'-0"

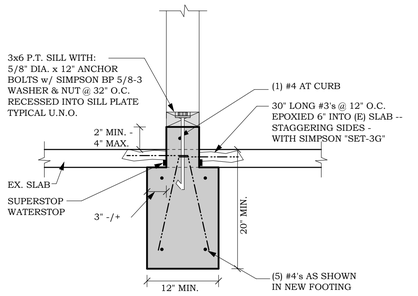

3 NEW FOOTING

4

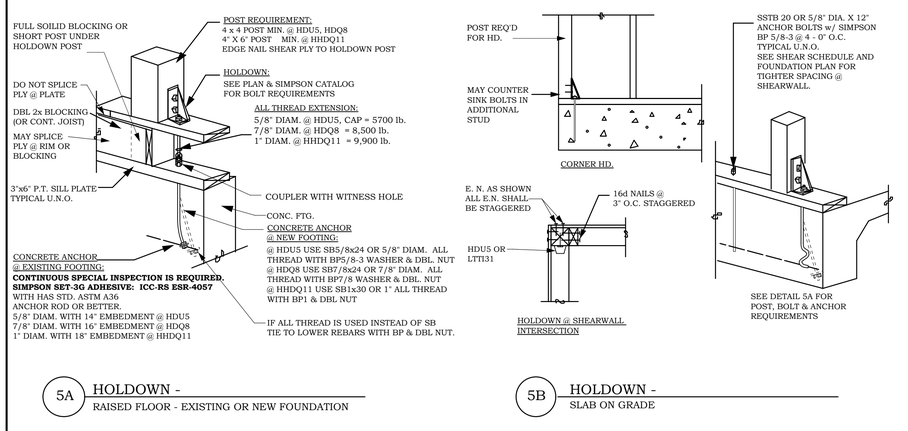

5A HOLDOWN - RAISED FLOOR - EXISTING OR NEW FOUNDATION

5B HOLDOWN - SLAB ON GRADE

5 NEW HOLDOWNS

STRUCTURAL NOTES:

CONTRACTOR IS RESPONSIBLE FOR ALL DIMENSIONS AND GRADES. CONTRACTOR SHALL VERIFY ALL CONDITIONS IN FIELD AND NOTIFY THIS OFFICE OF ANY DISCREPANCIES FOR CLARIFICATION AND/OR RESOLUTION, PRIOR TO COMMENCEMENT OF WORK. CONTRACTOR SHALL ALSO VERIFY EXISTING CONDITIONS AND REPORT TO THE ENGINEEER IF ANY OF THE FOLLOWING IS FOUND:
1) DIMENSIONS ARE INCORRECT, 2) THE EXISTING BUILDING IS OUT OF SQUARE LEVEL,
3) FOUNDATION IS CRACKED, 4) DRYROT OR TERMITE DAMAGE,
5) ANY EXISTING CONDITIONS NOT SHOWN ON THEW DRAWINGS.

CONTRACTOR SHALL MEET WITH THE ENGINEER AT LEAST 2 WEEKS PRIOR TO START OF CONSTRUCTION OR DEMOLITION. ENGINEER TO REVIEW FOUNDATION PRIOR TO CONCRETE POUR(S). ENGINEER SHALL ALSO REVIEW SHEAR WALLS AND HOLDOWNS. NOTIFY ENGINEER AT LEAST 72 HOURS IN ADVANCE.

ALL WORK SHALL CONFORM WITH 2022 CALIFORNIA BUILDING CODE & 2021 INTERNATIONAL BUILDING CODE AS WELL AS ALL APPLICABLE LOCAL CODES IN EFFECT AT THE TIME OF CONSTRUCTION.

CONCRETE:

S - 1. REGULAR WEIGHT HARD ROCK. MIN. 28 DAY COMPRESSIVE STRENGTH = 2500 psi AND MAX. SLUMP = 4 inch. USE TYPE II CEMENT PER ASTM C150. NO SPECIAL INSPECTION IS REQUIRED. WATER -CEMENT RATIO FOR INTERIOR SLABS SHALL BE MAXIMUM 0.45
S - 2. ALL CAST IN PLACE CONCRETE PIERS TO BE 2500 psi. - CONCRETE SPECIAL INSPECTION IS NOT REQUIRED
S - 3. CONCRETE COVER.

	MINIMUM COVER, inches (mm)
A. Concrete cast against and permanently exposed to earth	3 (76)
B. Concrete exposed to earth or weather:	
No. 6 through No. 18 bar	2 (51)
No. 5 bar, W31 or D31 wire, and smaller.....	1 1/2 (38)
C. Concrete not exposed to weather or in contact with ground:	
Slabs, walls, joists:	
No. 14 and No. 18 bar	1 1/2 (38)
No. 11 bar and smaller	3/4 (19)
Beams, columns:	
Primary reinforcement, ties, stirrups, spirals	1 1/2 (38)
Shells, folded plate members:	
No. 6 bar and larger	3/4 (19)
No. 5 bar, W31 or D31 wire, and smaller	1/2 (12.7)

STEEL:
S - 4. ASTM A-615 GRADE 40. SPLICES AND CORNER LAP 42 DIAMETER.
S - 5. ANCHOR BOLTS: ASTM A307 5/8" X 12" OR APPROVED EQUAL w/ SIMPSON BP 5/8-3 @ 48" O.C. UNLESS NOTED OTHERWISE.

FRAMING: MAY USE APPROVED EQUAL OSB INSTEAD OF PLYWOOD TYPICAL EXCEPT @ FLOORING
S - 6. ALL FRAMING TO CONFORM TO CHAPTER 23 2022 C.B.C.
S - 7. ALL NAILING TO CONFORM TO TABLE 2304.10.1 2022 C.B.C.
S - 8. **A)** SUB-FLOOR PLYWOOD: 3/4 INCH APA RATED T&G PLYWOOD 32/16 EXPOSURE 1 MINIMUM, GLUDED AND NAILED. TYPICAL U.N.O.
B) SUB-FLOOR NAILING: 10d NAILS @ 6" O.C. EDGE AND 10" O.C. FIELD.
S - 9. **A)** ROOF PLYWOOD: 5/8" PLYWOOD AT 24" O.C. RR, 1/2" PLYWOOD @ 16" O.C. RR SPACING. PLYWOOD SHALL BE APA RATED 24/0 EXPOSURE 1 MINIMUM. TYPICAL U.N.O.
B) ROOF NAILING: 8d COMMON NAILS @ 6" O.C. EDGE NAIL AND 12" O.C.FIELD.
S - 10. FRAMING LUMBER: DFL NO. 2 OR BETTER. THIS INCLUDES 2" THICK TO 12" WIDE.
S - 11. STRUCTURAL LUMBER: DFL NO. 1 OR BETTER. THIS INCLUDES 4" THICK OR THICKER, AND 6" WIDE OR WIDER. EXTERIOR BEAMS TO BE TREATED.
S - 12. ALL EXTERIOR FRAMING, OR IN DIRECT CONTACT WITH CONCRETE OR EXPOSED TO HIGH MOISTURE CONDITIONS SHALL BE PRESSURE PRESERVATIVE TREATED.
S - 13. ENGINEERED LUMBER: SUBMIT AITC CERTIFICATIONS TO BUILDING DEPARTMENT PROIR TO ERECTION.
TJI PRO FLOOR JOISTS: ICC REPORT No. ESR-1153.
MICROLLAM: ICC REPORT No. ESR-1387,
BENDING STRESS: 2800 psi, SHEAR STRESS: 290 psi, E: 2,000 ksi.
PARALLAM: ICC REPORT No. ESR-1387,
BENDING STRESS: 2900 psi, SHEAR STRESS: 290 psi, E: 2,000 ksi.
GLULAM BEAMS: AIRC 117 24Fv4. NO CAMBER U.N.O.
S - 14. SILL PLATES: ALL 3X PRESSURE TREATED TIMBER.
S - 15. DOUBLE FLOOR JOISTS UNDER ALL PARALLEL PARTITIONS TYPICAL U.N.O.
S - 16. PROVIDE SOLID BLOCKING UNDER ALL PERPENDICULAR PARTITIONS.
S - 17. WALL STUDS: USE 2" X 4" STUDS TO 10 FEET HIGH, 2" X 6" STUDS TO 16 FEET HIGH AND 2" X 8" STUDS TO 22 FEET HIGH (16" O.C. U.N.O.). - DOUBLE KING STUDS @ WALL ENDS FOR WALLS OVER 10 FEET.
S - 18. CONNECTORS: SIMPSON OR APPROVED EQUAL. THIS INCLUDES ANCHORS FOR SHEAR WALLS AND STRAP TIES.
S - 19. MANUFACTURED TRUSSES BALCONY AND STAIR RAILINGS TO BE PRE-ENGINEERED: SUBMIT PLANS AND CALCULATIONS TO THE APPROPRIATE AUTHORITY PRIOR TO INSTALLATION.
S - 20. PRE-MANUFACTURED SHEAR WALLS: CONTRACTOR TO THOROUGHLY REVIEW INSTALLATION SPECIFICATIONS PRIOR TO FORMING OF FOUNDATION.
HARDY FRAME: ICC REPORT No. ES-ESR-2089
SIMPSON STRONG-WALL: ICC REPORT No. ES-ESR-1267
S - 21. ALL SITE AND FOUNDATION WORK SHALL BE DONE IN ACCORDANCE WITH 2022 C.B.C CHAPTER 18
S - 22. ALL NEW FRAMING LUMBER SHALL HAVE 19% MAX MOISTURE CONTENT @ INSTALLATION
S - 23. CONNECTORS FOR PRESSURE TREATED LUMBER (NAILS, HANGERS, ANCHOR BOLTS, PLATE WASHERS, ETC) SHALL BE HOT DIPPED GALVINIZED STAINLESS STEEL SILICON BRONZE OR COPPER PER 2022 CBC 2304.9.5.
S - 24. CHOROMATED COPPER ARSENATE (CCA) AS A PRESERVATIVE FOR WOOD (GREEN WOOD) INTENDED FOR RESIDENTIAL USE IS NOT ACCEPTABLE.
S-25 THAT SPECIAL INSPECTION PER 2022 CBC CHAPTER 17 IS REQUIRED FOR THE FOLLOWING:
A. Shop and field structural welding.
B. Construction of drilled piers or piles (driving of piles; drilling of piers, testing of piles). Note that these special inspections are normally provided by the geotechnical engineer and are in addition to concrete and rebar placement special inspections, for piers provide special inspection for concrete pier compression per CBC 1808-2-22.
C. Observation of soil excavation and foundation construction operations by geotechnical engineer.
D. Holdown rods epoxied into ex. foundation- see 1/SD1.
E. Special inspection is required on all welding.
F. Special inspection for epoxied holdowns.
G. Special inspection for shearwalls 4' or less nailing.

SHEAR WALL NAILING SCHEDULE ** USE 1/2" PLYWOOD AT STUCCO WALLS. (See note S-5)

TYPE	NAILING	ANCHOR BOLT SPACING
A	3/8 INCH CDX W/ 8d @ 6" O.C. EDGES & SILL, 12" O.C. FIELD. CAP = 244 PLF	48" O.C.
B	3/8 INCH CDX W/ 8d @ 4" O.C. EDGES & SILL, (@ 3x STUDS , & PLATE, STAGGER NAILING) 12" O.C. FIELD. CAP = 350 PLF	32" O.C.
C	3/8 INCH CDX W/ 8d @ 3" O.C. EDGES & SILL, (@ 3x STUDS & PLATE, STAGGER NAILING) 12" O.C. FIELD CAP = 490 PLF.	16" O.C.
E	1/2 INCH STRUCTURAL 1 PLYWOOD W/ 10d @ 2" O.C. EDGES & SILL (@ 3x STUDS & PLATE, STAGGER NAILING) 12" O.C. FIELD. CAP = 870 PLF.	12" O.C.

** USE 1/2" PLYWOOD AT STUCCO WALLS.
SW-1. AT TYPES "B", "C", & "E" SHEARWALLS, FOUNDATION SILL PLATES AND ALL FRAMING MEMBERS RECEIVING EDGE NAILING FROM ABUTTING PANELS SHALL NOT BE LESS THAN 3" NOMINAL AND NAILS SHALL BE STAGGERED.
SW-2. WHERE PLYWOOD IS APPLIED ON BOTH FACES OF A WALL AND NAIL SPACING IS LESS THAN 6" O.C. ON EITHER SIDE, PANEL JOINTS SHALL BE ON 3" NOMINAL OR THICKER FRAMING AND NAILS ON EACH SIDE SHALL BE STAGGERED.
SW-3. FOR CONNECTION OF SOLE PLATES AT INTERIOR WALLS, SEE DETAILS 9, 10 & 11
SW-4. SEE NOTE S-5, THIS SHEET, FOR TYPICAL A.B. SPACING AND TABLE ABOVE FOR TIGHTER A.B. SPACING AT SHEARWALLS. TIGHTER SPACING SHOWN ON FOUNDATION PLAN GOVERSN OVER TABLE BELOW. PROVIDE MINIMUM (2)A.B. BETWEEN HOLDOWNS UNDER SHEARWALLS.
SW-5. MINIMUM SHEET DIMENSION FOR A PLYWOOD PANEL SHALL BE 24" UNLESS ALL EDGES OF UNDERSIZED SHEETS ARE SUPPORTED BY FRAMING MEMBERS OR BLOCKING PER SECTION 2315.5.3.
SW-6. USE COMMON NAIL FOR SHEAR NAILING. NAIL HEAD NOT TO PENETRATE PLYWOOD SURFACE, NO NAIL GUN IS ALLOWED AT SHEARWALLS.
SW-7. ALL NAILING SHALL BE STAGGERED.

THE ENGINEER EXPRESSLY RESERVES ITS COMMON LAW COPYRIGHT AND OTHER PROPERTY RIGHTS IN THESE PLANS. THESE PLANS ARE NOT TO BE REPRODUCED, ALTERED, OR COPIED IN ANY FORM OR MANNER WHATSOEVER, NOR ARE THEY TO BE ASSIGNED TO A THIRD PARTY WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION AND CONSENT OF THE ENGINEER. IN THE EVENT OF UNAUTHORIZED REUSE OF THESE PLANS BY A THIRD PARTY, THE ENGINEER SHALL BE HELD HARMLESS.

Ali Atib, P.E.
ATA ENGINEERING
1202 Main Street, Redwood City, CA 94063
Tel. 650.363.2338, Fax 650.363.2031, email: ata@ataeng.net

STRUCTURAL DETAILS & NOTES

REGISTERED PROFESSIONAL ENGINEER — Ali Atib — No. CE49976 Exp. 6-30-25 — CIVIL — STATE OF CALIFORNIA

PLANS ARE FAVORABLY REVIEWED FOR COMPLIANCE WITH STRUCTURAL CALCULATIONS ONLY

REMODEL/ADDITION:
ADIB'S PERSIAN RUG CO
1426 S MAIN STREET
WALNUT CREEK,CA

DATE: 2024-08-10

SD-1

OF SHEETS