REFERENCE TOOLKIT · 19 OCT 2026

1426 S Main St — Storage


Where the overflow rugs are, what the site allows, and what insurance requires. Includes Hamed's container research and vendor quotes (2023–2025).

~1,000 RUGS AT 1426, FLOOR-STACKED	**$1,900** AVG COST PER RUG (2023)	**$25,000** THEFT SUB-LIMIT PER LOCATION (2023 QUOTE)	**900 sf** EXISTING WAREHOUSE, 1420 S MAIN	**$3,300** 20 FT ONE-TRIP, LATEST QUOTE (SEP 2025) + $150 DELIVERY	**30 ft** CREEK STRUCTURAL SETBACK

Locations today

LOCATION	USE	INSURED CONTENTS (2023 QUOTE)	SOURCE
1426 S Main St	Store, 3,727 sf, built 1957	$1,500,000	Hamed to Curt 9/22/2023 · Scottsdale quote
1420 S Main St / 1495 Newell Ave Ste 200	2nd-floor space, rated "Warehouses – Private", 900 sf	$300,000	Same · State Farm emails 2019
1432 S Main St	Family building, built 1947, ≈2,105 sf; leased to a tenant	$300,000 (to move to landlord policy)	Same · 1432 LOI 2023

Site

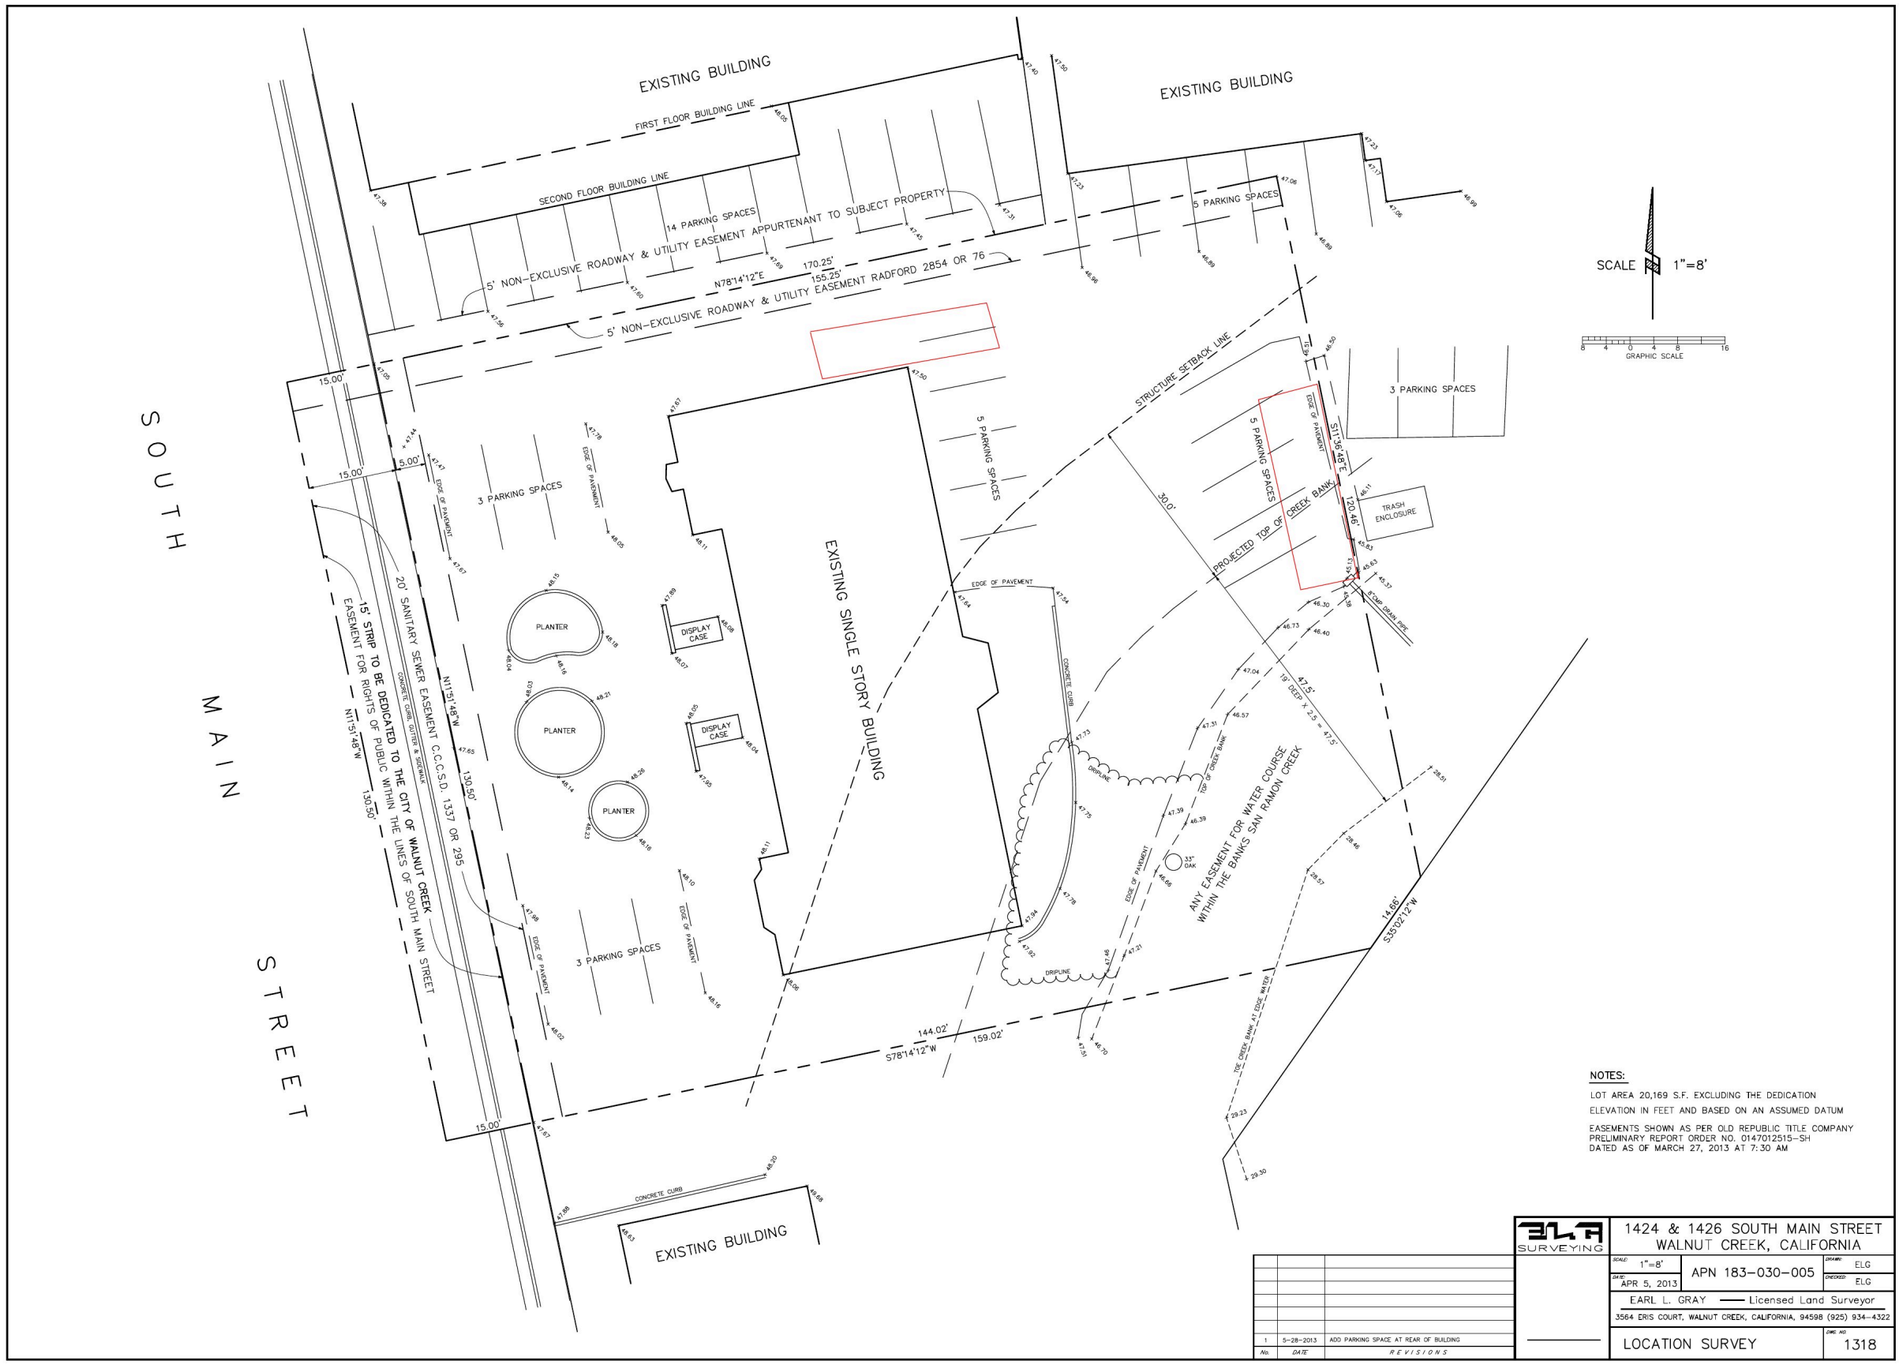

Location survey dwg 1318, Earl L. Gray, 2013, 1″ = 8′, with two container locations drawn in red (file dated and sent by Hamed 15 May 2023). Creek at lower right.

Open full size

.

PDF

RED MARK	POSITION ON SURVEY	SIDE OF STRUCTURE SETBACK LINE	OVERLAPS
North	Between the building's north wall and the 5′ non-exclusive roadway & utility easement (Radford 2854 OR 76)	Building side	Rear parking area
East	East lot line, beside the trash enclosure	Creek side, at projected top of creek bank	5 parking spots

SURVEY DATA	VALUE
Lot area	20,169 sf excluding the dedication
Easements	Per Old Republic Title prelim. report 0147012515; 5′ roadway & utility easements on north side; creek watercourse easement
Spot elevations near the marks	≈45.1–47.5 ft (assumed datum)

3D scan of building and lot edges: Matterport tour

Hamed's container research (2023–2025)

DATE	WHO	WHAT WAS SAID
2023-05-15	Hamed	Marked two container locations on survey 1318 ("Container Location")
2023-09-05	Hamed → Curt	"If I have a storage container on site (like a 20ft shipping container), would inventory stored in the storage container be covered by our insurance (ie against theft)?"
2023-09-06	Curt	"It would need a good layer of Security… Unless there's a 3rd party security cameras or a 3rd party central alarm on the container theft would not be covered."
2023-09-06	Hamed → Curt	"If I added a third party monitored door sensor and motion sensor, which is tied into the central alarm system, it's covered?" Curt: "Yes, that is correct."
2023-09-06	Curt	"I would put some barriers that would slow down the removal of the inventory if they breach the lock."
2023-09-22	Underwriter (via Curt)	Concern: rug values and stacking "causing a high fire load"; no sprinkler or fire alarm shown on the Acord.
2023-09-22	Hamed	Rugs are handspun wool (little silk), flame-retardant (IWTO data, below); avg cost $1,900; imported; stacked on the ground; 3rd-party monitored fire alarm; no sprinklers; hydrants along Main St.
2023-10-16	Curt	Alternative quote came back higher; renewal stays with Scottsdale, moved to Coastal Underwriters (broker-of-record letter).

Vendor quotes below were forwarded by Hamed on 19 Oct 2026. No city container rules were found in email.

Container quotes Hamed received (emails)

DATE	VENDOR · CONTACT	ITEM	UNIT PRICE	DELIVERY TO WALNUT CREEK	NOTES
2023-05-09	Conexwest · Sharon DeChavez, (510) 925-1346 · quote QT-312363	40 ft used cargo-worthy, standard	$2,650	$275 (tilt-bed)	5-yr leak warranty; 10–17 yrs old
		40 ft used cargo-worthy, high cube	$2,750		5-yr leak warranty

DATE	VENDOR · CONTACT	ITEM	UNIT PRICE	DELIVERY TO WALNUT CREEK	NOTES
		40 ft new one-trip, high cube, ISO lockbox	$5,695		10-yr leak warranty; in stock; tax 8.75%
2024-07-21	Conex Depot · John Chan, (661) 429-3066 · #70062319	20 ft standard new one-trip (×2)	$3,599 ea ($7,198)	$1,098 for 2	Total $8,296 for 2
		20 ft open-side new one-trip	$8,999	$549	Full side opens
		40 ft high cube open-side new one-trip	$15,499	$699	Same request asked for 2 × 40 ft to Salt Lake City
2025-09-16	Container Solutions · Meredith Wolfe, 800-506-7368	20 ft single-trip, cargo doors + lockbox	$3,300	$150	$3,769.13/unit with 9.25% tax · $7,538.25 for 2
		20 ft high cube single-trip, cargo doors + lockbox	$4,250		$4,807.00/unit with tax · $9,614.00 for 2 · 65 ft straight approach needed

Quotes were valid 2–14 days when issued; prices are from the dates shown. Conexwest PDF: QT-312363.

Wool & Fire Facts

Research indicates that wool used in apparel and furnishing textiles can provide a greater level of fire safety than other fibres:

- Wool is difficult to ignite (570-600 °C) compared to Cotton (255 °C) or Polyester (485-560°C)
- Wool does not melt, unlike polyester and nylon, which melt at 252-292°C and 160-260°C respectively
- Wool – even when warm – does not stick to the skin
- Wool has a low heat combustion level, meaning the amount of heat released in burning
- Wool does not produce toxic fumes when exposed to high temperatures

Table: Key measures of flammability for common textile fibres

Fibre	Limiting Oxygen Index (%)	Heat of combustion (Kcal/g)	Ignition temp (°C)	Melting temp (°C)
Wool	25.2	4.9	570-600	Does not melt
Cotton	18.4	3.9	255	Does not melt
Nylon	20.1	7.9	485-575	160-260
Polyester	20.6	5.7	485-560	252-292
Rayon	19.7	3.9	420	Does not melt

Wool fire facts sent to the underwriter, 22 Sep 2023 (source: IWTO, PDF).

Insurance terms (Scottsdale quote QT-03483061, policy 11/3/2023–11/3/2024)

LOCATION	CLASS	CONTENTS (BPP)	THEFT SUB-LIMIT	BUILDING	DEDUCTIBLE
1426 S Main	Antique stores incl. oriental rug stores · joisted masonry · 1957	$1,500,000 RC	$25,000	$600,000	$5,000
1420 S Main	Same class; liability rated "Warehouses – Private", 900 sf	$300,000 RC	$25,000	—	$5,000
1432 S Main	Same class · joisted masonry · 1947	$300,000 ACV	$25,000	$500,000	$5,000

POLICY ITEM	VALUE
Endorsements tied to theft	CFS-24s Theft Sub-limit · CP 12 11 Burglary & Robbery Protective Safeguards
Binding conditions	Alarm certificate for all three locations; updated Acord with alarm and building info

POLICY ITEM	VALUE
Container theft cover	Only with 3rd-party monitored alarm or cameras; monitored door + motion sensors accepted (Curt, 9/2023)
Fire protection on file	3rd-party monitored fire alarm · no sprinklers · protection class 03
Current policy	Terms after Nov 2024 not in email; confirm with Curt

Rules on this lot

CONSTRAINT	VALUE	SOURCE
Creek structural setback (CCCFCD)	30 ft from 2.5:1 line off creek toe; ≈⅓ of building already inside	Staff report 5/28/2020
Creek Preserve Area	50 ft from creek centerline	Staff report 5/28/2020
Building to the rear	"cannot build to the rear of it"	LCA Architects, 1/31/2020
Parking reduction	max 20%; staff unlikely to support (2019)	PRT 2019 · staff report 2020
Access path	Shared with neighbor; recorded revocable license; used by Republic Services trucks	License v09, 2020
Container / shed permit	Not found in email; ask the city	—

Installation — web research

From public web sources (city code, fire code, vendors, conservators), not from the emails. Click a row ID for the full quote. Nothing here is a city ruling: the zoning question goes to the Duty Planner.

ITEM	VALUE	DETAIL	SOURCE
City rules	Outdoor storage prohibited except listed uses (WCMC 10-2.3.121.B)	Walnut Creek bans outdoor storage in every zone except a short list of uses, and general retail inventory storage is not on that list.	Article 1: Site Regulations R003
	—	Unverified: I found no Walnut Creek provision that names cargo, shipping or portable storage containers; ask the Duty Planner whether a 20/40-ft container in C-R is an accessory structure (design review plus building permit) or barred outdoor storage under 10-2.3.121, and whether any temporary allowance exists.	Design Review R011
	New structure ≤500 sf = minor project	Placing a container (a structure) needs design review; a new structure of 500 sf or less is a minor project.	Article 12: Design Review R010
	120 sf max (CBC 105.2 item 1)	The CBC permit exemption covers only one-story detached storage sheds up to 120 sf; a 20-ft (about 160 sf) or 40-ft (about 320 sf) container is larger than that.	Chapter 1 Scope and Administration R013
	>120 sf = building permit	The City's own guidance: accessory structures of 120 sf or less need no permit, and anything over 120 sf needs a building permit.	Accessory Structures in Resident… R017

ITEM	VALUE	DETAIL	SOURCE
	Temporary structures ≤180 days	Temporary structure permits are time-limited and capped at 180 days unless the building official grants an extension.	Chapter 1 Scope and Administration R014
Placement on lot	WCMC 10-2.3.116	Non-residential lot areas used to store equipment or materials must be paved and kept orderly.	Article 1: Site Regulations R009
	Retention of Existing Parking	Existing parking cannot be reduced below the required number, and existing deficient parking cannot be reduced further, so containers cannot take required parking spots.	Article 2: Off-Street Parking, L... R022
	WCMC 10-2.4.1202	Substantially altering a parking layout or its dimensions, such as removing parking spots for containers, needs design review approval.	Article 12: Design Review R026
	CFC 503.4	Fire access roads may not be obstructed in any way, so containers cannot sit in a required fire lane.	Chapter 5 Fire Service Features R039
	10 ft from lot line (3 ft if ≤6 ft high)	Outside combustible storage must be at least 10 ft from a lot line, or 3 ft if no higher than 6 ft, unless the fire code official approves less.	Chapter 3 General Requirements R041
	—	Unverified: I found no Walnut Creek code section adopting the CCCFCD 30-ft structure setback or a projected top-of-bank method for this parcel; ask Walnut Creek Engineering and CCCFCD for the setback line here and whether an unanchored container counts as a structure. County guidance says sheds closer than 10 ft to top of bank should be anchored.	Maintenance of Creeks on Private... R037
Delivery	75 ft (20ft) / 120 ft (40ft); 16 ft high tipped; 12 ft width	Western Container Sales needs 75 ft of straight clearance to deliver a 20ft container and 120 ft for a 40ft, with up to 16 ft of overhead clearance while the truck is tipped.	Western Container Sales – Delivery R134
	70 ft (20ft) / 120 ft (40ft), 10 ft wide, 16 ft high	Dry Box says the delivery spot should be solid, smooth and level, preferably on gravel, with 70 ft of straight clearance for a 20ft and 120 ft for a 40ft.	Dry Box – Storage Containers for... R171
	4–7 business days (buy); 2–5 business days (rent)	Western Container Sales gives typical delivery windows of 4 to 7 business days for purchases and 2 to 5 business days for rentals.	Western Container Sales – Oaklan... R135
Ground + anchoring	$300–$900 (20ft); $600–$1,800 (40ft); $1,200–$3,000 hired	A container vendor's 2026 guide estimates a DIY gravel pad at $300 to $900 for a 20ft and $600 to $1,800 for a 40ft, or $1,200 to $3,000 if hired out.	AM Shipping Containers – Shippin... R167
	$199.95 (4 PK)	Container Modification World sells a 4-pack of container shoes (corner footings) for $199.95.	Container Modification World R170
	—	Ground anchors (dovetail locks or foundation plates) fix containers to concrete or asphalt, which resists both wind displacement and theft.	Shipping Container Twist Locks &... R096
Climate inside	—	Condensation ('container rain') forms inside a closed steel container when the roof or walls cool below the dew point of the air inside, even if the container is weather-tight.	Container Rain Explained R098
	—	For a stationary container with power, the recommended approach is a dehumidifier drained regularly, plus desiccants for the moisture that builds up between cycles.	How To Stop Condensation In Ship... R100

ITEM	VALUE	DETAIL	SOURCE
	20ft: 1 intake + 1 exhaust	For a 20 ft storage container, use one low louvered intake and one high louvered or solar exhaust at the opposite end; for a 40 ft, a solar roof exhaust plus one or two low intakes.	How Many Vents Does a Shipping C… R102
	70% RH ~100 days; 80% RH ~10 days	The Canadian Conservation Institute says that at 25°C, 70% RH brings a risk of mould in about 100 days and 80% RH in about 10 days, so RH should stay well below 65%.	Caring for textiles and costumes… R104
	55–70°F; 40–55% RH	One rug retailer recommends storing at 55 to 70°F and 40% to 55% relative humidity, somewhere dark and well ventilated.	How to Store Rugs Properly R111
Rug handling	—	The Textile Museum advises rolling rugs with the pile inside and in the direction of the pile, to avoid abrading the pile or stressing the knots.	Storing Textiles R107
	1.5 wraps	Wrapping a rolled rug in muslin or cotton sheeting, at least one and a half turns, gives a breathable barrier against dust and light.	Storing Textiles R108
	—	Rug dealer guidance is to wrap in breathable material such as Tyvek, cotton or paper, never plastic, add a moth deterrent, and keep the rug off the floor.	How to Store a Rug (and Keep Mot… R110
Locks + alarm	$129.95	The DoorGuard container lock box with lock costs $129.95 and is designed so the lock is not exposed, unlike a puck lock hasp.	DoorGuard Lock Box for Shipping… R095
	$145.99	USA Containers lists a heavy-duty container door bar lock system at $145.99, alongside puck lock boxes.	Shipping Container Locks & Lock… R093
	battery life >1 year	The Mobeye container alarm is a battery-powered, stand-alone unit with a PIR motion sensor and an external cellular antenna; it can send alerts to a private monitoring centre and its batteries last over a year.	Container alarm – Mobeye R086
	—	Self-contained cellular container alarms can route alerts to a professional alarm receiving centre (ARC), which is what the insurer's central-station requirement calls for.	Container alarm – Mobeye R087

Cost — web research

Published list prices seen Oct 2026, before tax, delivery and permits unless stated. Not quotes, and not from the emails.

ITEM	VALUE	DETAIL	SOURCE
Buy, used 20 ft	$1,345 + Delivery	Western Container Sales lists a used wind-and-water-tight 20ft standard container in Oakland at $1,345 before delivery.	Western Container Sales – Shippi… R120
	$1,899 (20' WWT); $2,199 (20' CW)	Conex Depot Oakland lists used 20ft standard containers at $1,899 for WWT and $2,199 for cargo worthy, both shown as sale prices.	Conex Depot – Oakland CA Shippin… R126
	As low as $1,325 (20ft); As low as $1,669 (40ft)	Conexwest lists starting prices of $1,325 for a 20ft and $1,669 for a 40ft container.	Conexwest – Roll-Up Door 8ft x 7… R131

ITEM	VALUE	DETAIL	SOURCE
Buy, new 20 ft	$2,590 (20' std OT); $3,490 (20' HC OT); $3,690 (40' HC OT) + Delivery	Western Container Sales lists new one-trip containers in Oakland at $2,590 for a 20ft standard, $3,490 for a 20ft high cube and $3,690 for a 40ft high cube.	Western Container Sales – Oaklan... R124
	$3,099 (20' std); $5,399 (20' HC); $5,499 (40' std); $4,399 (40' HC)	Conex Depot Oakland lists new one-trip containers at $3,099 for a 20ft standard, $5,399 for a 20ft high cube, $5,499 for a 40ft standard and $4,399 for a 40ft high cube.	Conex Depot – Oakland CA Shippin... R128
Buy, 40 ft	$1,745 + Delivery	Western Container Sales lists a used WWT 40ft standard container in Oakland at $1,745 before delivery.	Western Container Sales – Oaklan... R121
	$2,299 (40' WWT); $2,599 (40' CW); $2,399 (40' HC WWT); $2,699 (40' HC CW)	Conex Depot Oakland lists used 40ft containers at $2,299 for a standard WWT, $2,599 for a standard cargo worthy, $2,399 for a high cube WWT and $2,699 for a high cube cargo worthy.	Conex Depot – Oakland CA Shippin... R127
Rent	$145/mo + Delivery; 3-month minimum	Western Container Sales rents a 20ft standard container in the Oakland market for $145 per month plus delivery, with a 3-month minimum.	Western Container Sales – Oaklan... R138
	$179/mo (40' std); $219/mo (40' HC) + Delivery	Western Container Sales rents a 40ft standard for $179 per month and a 40ft high cube for $219 per month, each plus delivery with a 3-month minimum.	Western Container Sales – Oaklan... R139
	$119 / 4 weeks (20ft); $139 (20ft HC); $139 (40ft); $149 (40ft HC)	Conexwest, based in Lathrop, publishes Bay Area rental rates per 4-week period: $119 for a 20ft, $139 for a 20ft high cube, $139 for a 40ft and $149 for a 40ft high cube.	Conexwest – Shipping Container R... R141
	$59.99 / 4 weeks (20ft); $99.99 / 4 weeks (40ft)	ContainersX advertises Oakland and East Bay rentals from $59.99 per 4 weeks for a 20ft and $99.99 for a 40ft, with no long-term contracts.	ContainersX – Shipping Container... R144
	From $100/month (20ft); From $175/month (40ft)	CMG Containers advertises California rentals from $100 per month for a 20ft and $175 per month for a 40ft, month-to-month with no minimum and pickup included.	CMG Containers – Storage Contain... R145
Delivery	$725 first 100 miles; $7.25/mile after	YES Containers charges $725 to deliver from its Oakland depot for the first 100 miles, plus $7.25 per mile after that; Walnut Creek falls within the first 100 miles.	YES Containers – Used 40ft HC Oa... R132
	$175/hour, 2-hour minimum	Midstate Containers charges $175 per hour, with a 2-hour minimum, to relocate an empty container.	Midstate Containers – Electric P... R136
Site prep	$300–$900 (20ft); $600–$1,800 (40ft); $1,200–$3,000 hired	A container vendor's 2026 guide estimates a DIY gravel pad at $300 to $900 for a 20ft and $600 to $1,800 for a 40ft, or $1,200 to $3,000 if hired out.	AM Shipping Containers – Shippin... R167
	$20–$50/ton gravel; $130–$200/cu yd concrete	The same guide puts crushed gravel at $20 to $50 per ton delivered and concrete at about $130 to $200 per cubic yard.	AM Shipping Containers – Foundat... R168
	$199.95 (4 PK)	Container Modification World sells a 4-pack of container shoes (corner footings) for $199.95.	Container Modification World R170

ITEM	VALUE	DETAIL	SOURCE
Doors, vents, moisture	$777.21 (kit); $1,429.71 (installed)	Conexwest estimates about $777.21 for a pre-hung 36x80 man door kit and about $1,429.71 for a professionally installed standard man door.	Conexwest – Shipping Container w... R158
	From $199.95 (vent); From $349.95 (400 CFM solar fan)	Container Modification World sells passive louvered vents from $199.95 and a solar roof vent fan from $349.95; good ventilation matters for keeping wool dry.	Container Modification World R163
	As low as $107.49 (4-pack)	Mytee Products sells container desiccant moisture strips at $107.49 for a 4-pack; this is a passive alternative to a powered dehumidifier.	Mytee Products – (4 Pack) Shippi... R165
Alarm + monitoring	$500–$2,000; $40–$120/mo	A basic small-business alarm typically costs $500 to $2,000 to install, plus $40 to $120 per month for monitoring.	Business Alarm Systems Cost: 202... R081
	$299 install; $52.99/mo; 36-month contract	ADT advertises $299 installation for its business Interactive system with a 36-month monitoring contract starting at $52.99 per month.	Small Business Security Systems R079
	$50–$150 per camera/mo	Remote video monitoring for commercial sites typically costs $50 to $150 per camera per month.	Remote Video Monitoring Service... R088
Instead of a container	$194/mo online; $258/mo in-store	Public Storage at 1870 Arnold Industrial Pl, Concord lists a drive-up 10x20 outside unit at $194/month online versus $258/month in-store, with 1 unit left.	Climate Controlled Storage Units... R188
	$239.00 per month (10x20 climate); $234.00 per month (10x15 climate); + $29 fees	StorQuest at 2870 Camino Diablo, Lafayette (about 1.3 miles away) lists a climate-controlled interior 10x20 at $239/month (web rate) and a climate-controlled 10x15 at $234/month.	StorQuest R193
	$339.00 (Extra Space Concord Monument); $441.00 (Security Public Storage WC)	In the same search, Extra Space at 2580 Monument Blvd, Concord starts at $339 for a 10x20 and Security Public Storage at 2690 N Main St, Walnut Creek starts at $441.	Find a 10x20 Storage Unit in Wal... R197
	$15–$50 per rug per month	Fred Remmers Rug Cleaners stores rugs rolled on racks in a humidity-controlled room for $15–$50 per rug per month; the page did not confirm a Bay Area location.	Rug Storage — Fred Remmers Rug C... R219
	$22.20 SF/YR (230 - 1,920 SF)	171 Mayhew Way, Pleasant Hill offers 11 mixed-use spaces from 230 to 1,920 SF at $22.20/SF/YR (about $1.85/SF/month).	Pleasant Hill Industrial Spaces... R200
	starts at $149 per month; delivery/pick-up avg $74.99	PODS Bay Area storage starts at $149/month, month-to-month, with delivery and pick-up fees averaging $74.99; containers can stay on-site or at Bay Area Storage Centers such as Benicia, Oakland and Hayward.	San Francisco Storage Services,... R213
Racks	$699.00 USD (swing arm); $1,299.00 USD (20 arms); $1,764.00 USD (standing 10 arms)	Hais Display sells commercial rug racks from $699 for a swing-arm rack to $1,764 for a standing 10-arm rack, with a 20-arm rack at $1,299.	Premium Carpet Rug Display Colle... R222
	$560 / $550 / $540 each (qty tiers)	Uline's 96x42x96-inch boltless pallet rack starter unit costs $560 each, falling to $550 and $540 at higher quantities, with a 5,000 lb capacity per level.	Pallet Rack Starter Unit R224

Vendor

ITEM	DRY BOX (DRYBOXUSA.COM)
History	Used by Hamid in Utah. For Walnut Creek quotes see Quotes
Products	`New & used containers, 10–53 ft · rent or buy`
Modifications	Doors, windows, custom builds
Listed service area	WA, OR, ID, MT, UT, NV, CO, WY, FL. California not listed

People

NAME	ROLE	CONTACT
Ali Adib, P.E.	Civil engineer, local lead	`ata@ataeng.net · (650) 363-2338`
Medi Adibnatanzi	Coordinator	`thenatanzi@gmail.com`
Hamed Adibnatanzi	Did the 2023 container and insurance research	`hadib@adiblaw.com`
Curt Bulloch	Insurance broker (CA Lic 0I36002)	`curtbulloch@gmail.com · (925) 640-0485`
City of Walnut Creek	Building / Planning	`buildingtech@walnut-creek.org · (925) 943-5834`

Documents

DOCUMENT	DATE	EMAIL
Survey 1318 with container marks	`2013 / 2023-05-15`	Container Location
Container insurance thread (Hamed ↔ Curt)	`2023-09-05 → 10-16`	Storage Container Question
Scottsdale insurance quote	`2023-08-21`	Same thread
IWTO wool fire facts	`2023-09-22`	Same thread
Planning Commission staff report	`2020-05-28`	Staff Report
City PRT 19-011 report	`2019-08-14`	`1426 S. Main PRT`

Gmail links open only for the account owner.